




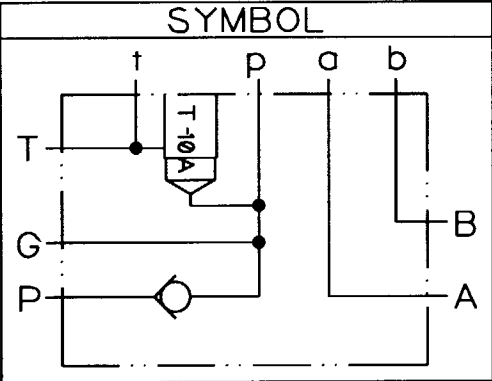

T-10A CAVITY
.031 L.S.DEPH

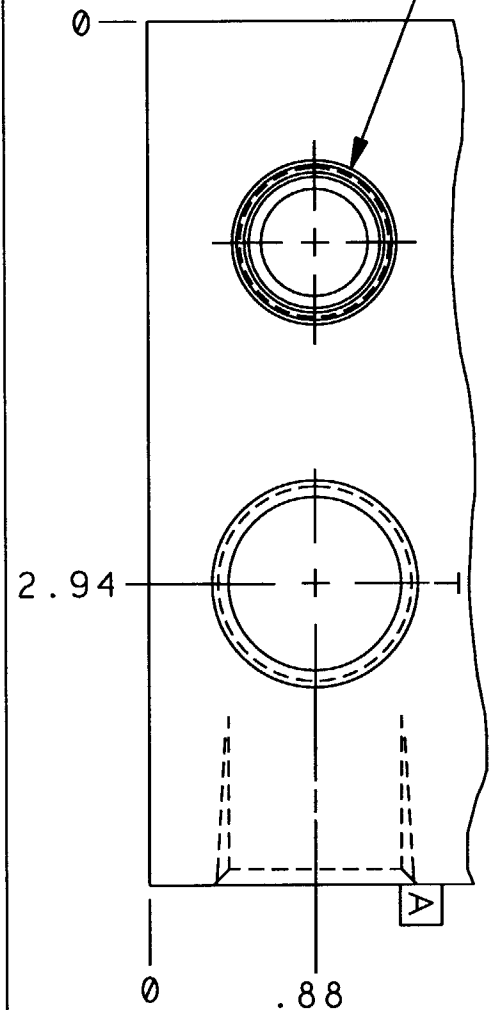

ISO 05 PATTERN
.250-20UNC x .50 DP
TYP (4) PLACES

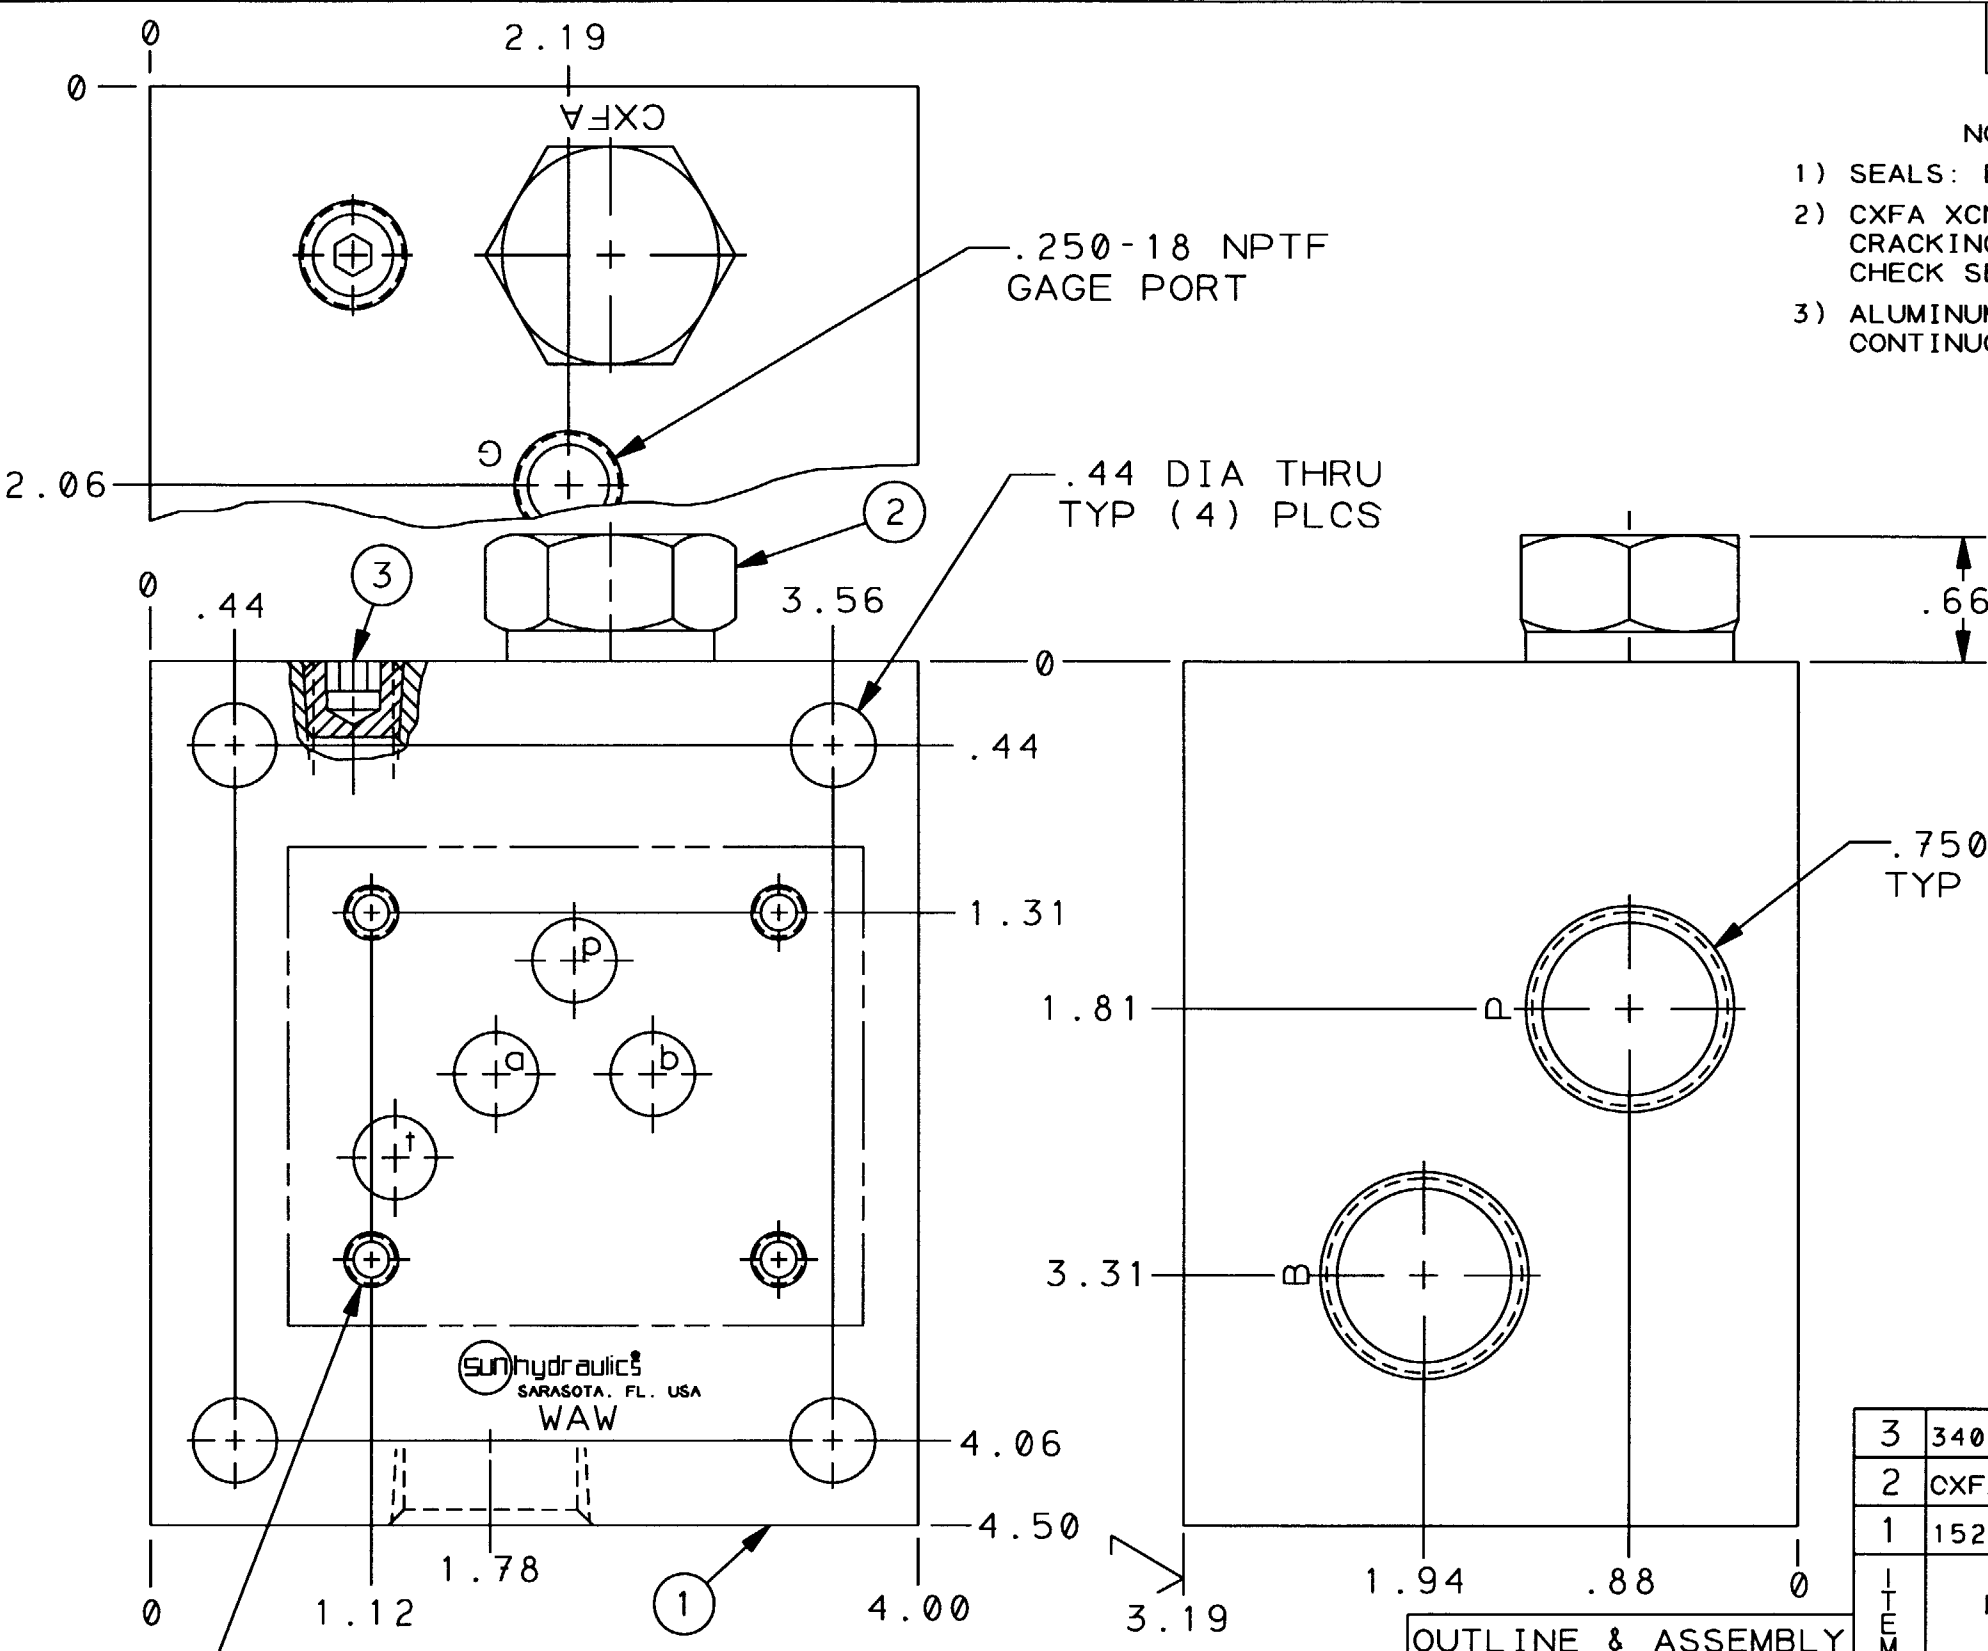

- NOTES:
- 1) SEALS: BUNA-N
 - 2) CXFA XCN CARTRIDGE:
CRACKING PRESS.: 30 +/- 3 PSI
CHECK SEAT: STEEL
 - 3) ALUMINUM BODIES: 3000 PSI MAX
CONTINUOUS SERVICE PRESSURE.

3	340-003	PIPE PLUG	1
2	CXFA XCN	CHECK VALVE	1
1	152-887-004	BODY	1
ITEM	PART NO.	PART NAME	QTY

UNLESS OTHERWISE SPECIFIED				TITLE ISO 05 SUBPLATE-RELIEF & CHECK CIRCUIT				REVISION	PART NO.
DIMENSION TOL				SCALE	REF.	MATERIAL			
.x ±.030				1:1		ALUM. & STEEL			
.xx ±.015				DRAWN	CHECK	HEAT TREAT & FINISH			
.xxx ±.005				DATE	DATE				
ANGLE TOL ± 1/2				7-17-92	7-17-92				
FINISH 80✓									
REMOVE ALL BURRS									
LET	REVISION	DATE	DRN	CHK	REL				

SUN hydraulics®
CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (813) 355-2983