



SYMBOLS

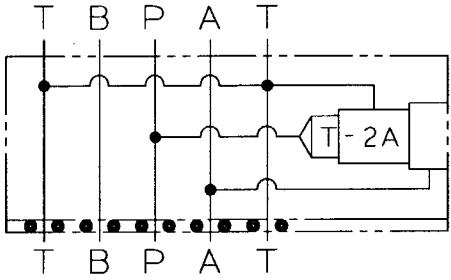


"A" PORT CONTROL

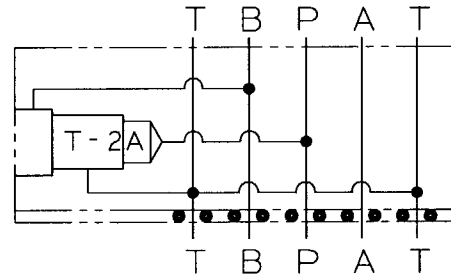



"B" PORT CONTROL

ISO Ø5 SANDWICH
.28 DIA. THRU
MOUNTING HOLE
TYP (4) PLACES

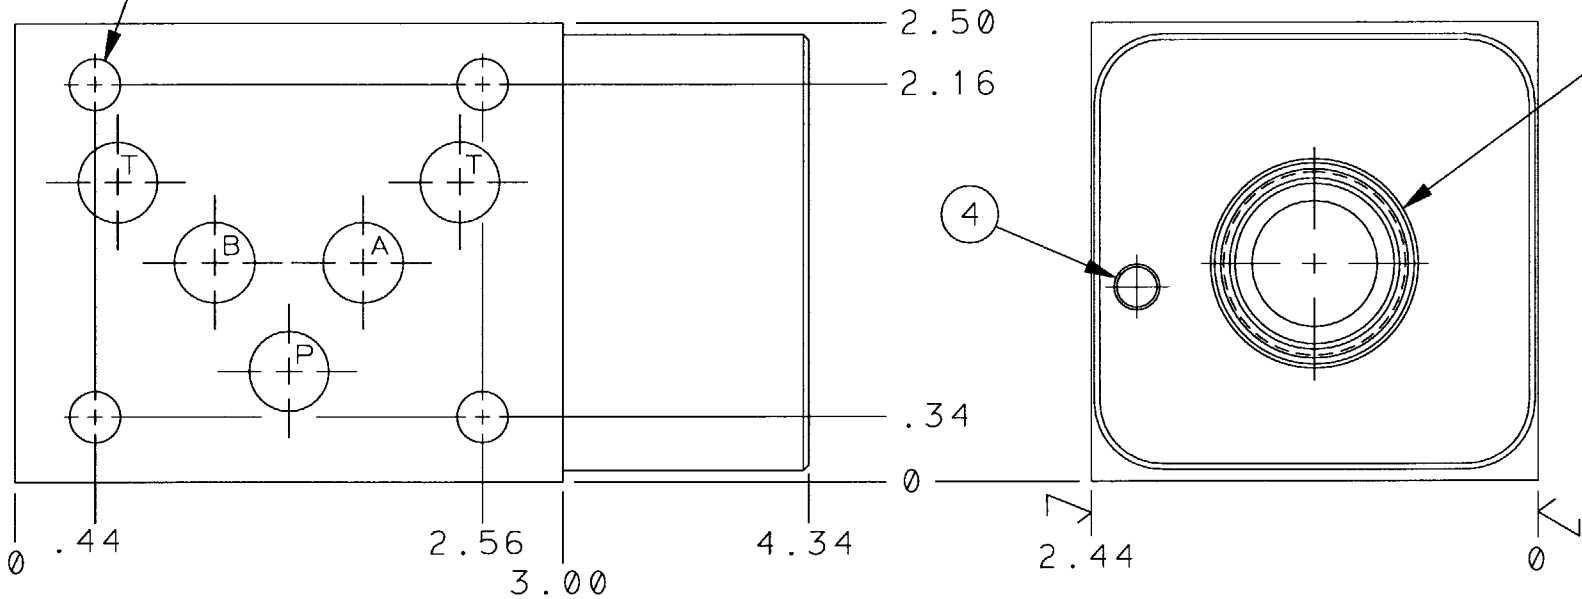

REVISION PART NO. WBB

- NOTES:
- 1)SEALS:BUNA-N
 - 2)ALUMINUM BODIES-3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE.
 - 3)FACE "O" RING, -.014,
FIVE PROVIDED
 - 4)SEAL PLATE MOUNTS ON
SIDE OPPOSITE SOLENOID
VALVE

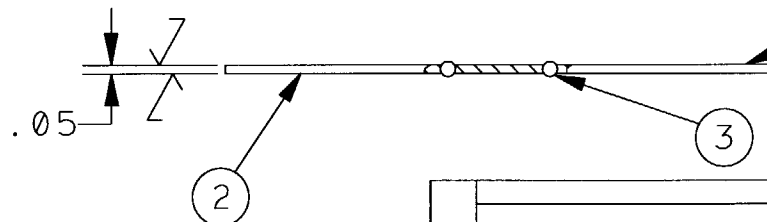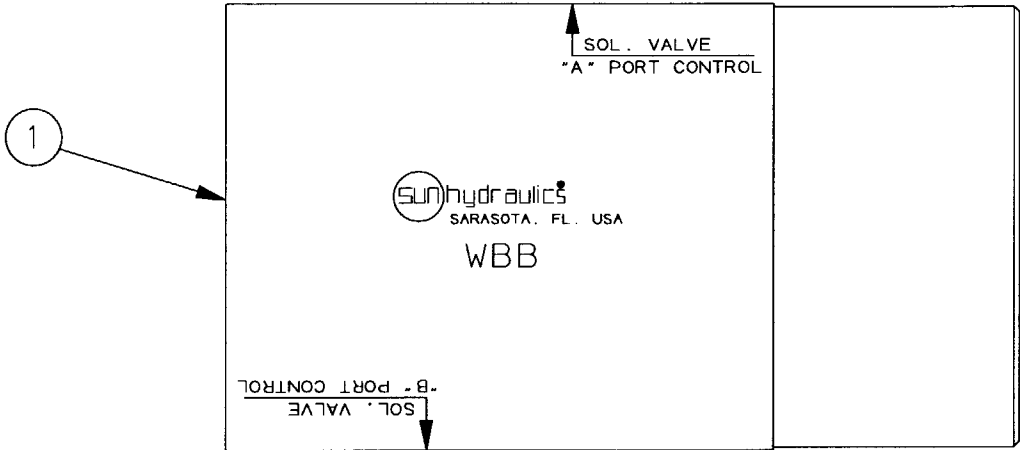

SEE NOTE #4 & SYMBOLS FOR
CORRECT MOUNTING OF
SEAL PLATE

OUTLINE & ASSEMBLY

4	850-004-250	PLUG	1
3	500-001-014	"O" RING	5
2	700-001	SEAL PLATE	1
1	152-880	BODY	1
ITEM	PART NO.	PART NAME	QTY

UNLESS OTHERWISE SPECIFIED	TITLE ISO Ø5 SANDWICH, T-2A CAVITY P-TO-T w/CONTROL FROM A OR B		REVISION	PART NO. WBB
DIMENSION TOL	SCALE 1:1	MATERIAL ALUMINUM		
.X = ±.030	DRAWN DAS	HEAT TREAT & FINISH		
.XX = ±.015	CHECK			
.XXX = ±.005	RELEASE 3826			
ANGLE TOL ± 1/2	DATE 7-6-92	DATE 7-8-92		
FINISH 80✓				
REMOVE ALL BURRS				
LET	REVISION	DATE	DRN	CHK
				REL

