

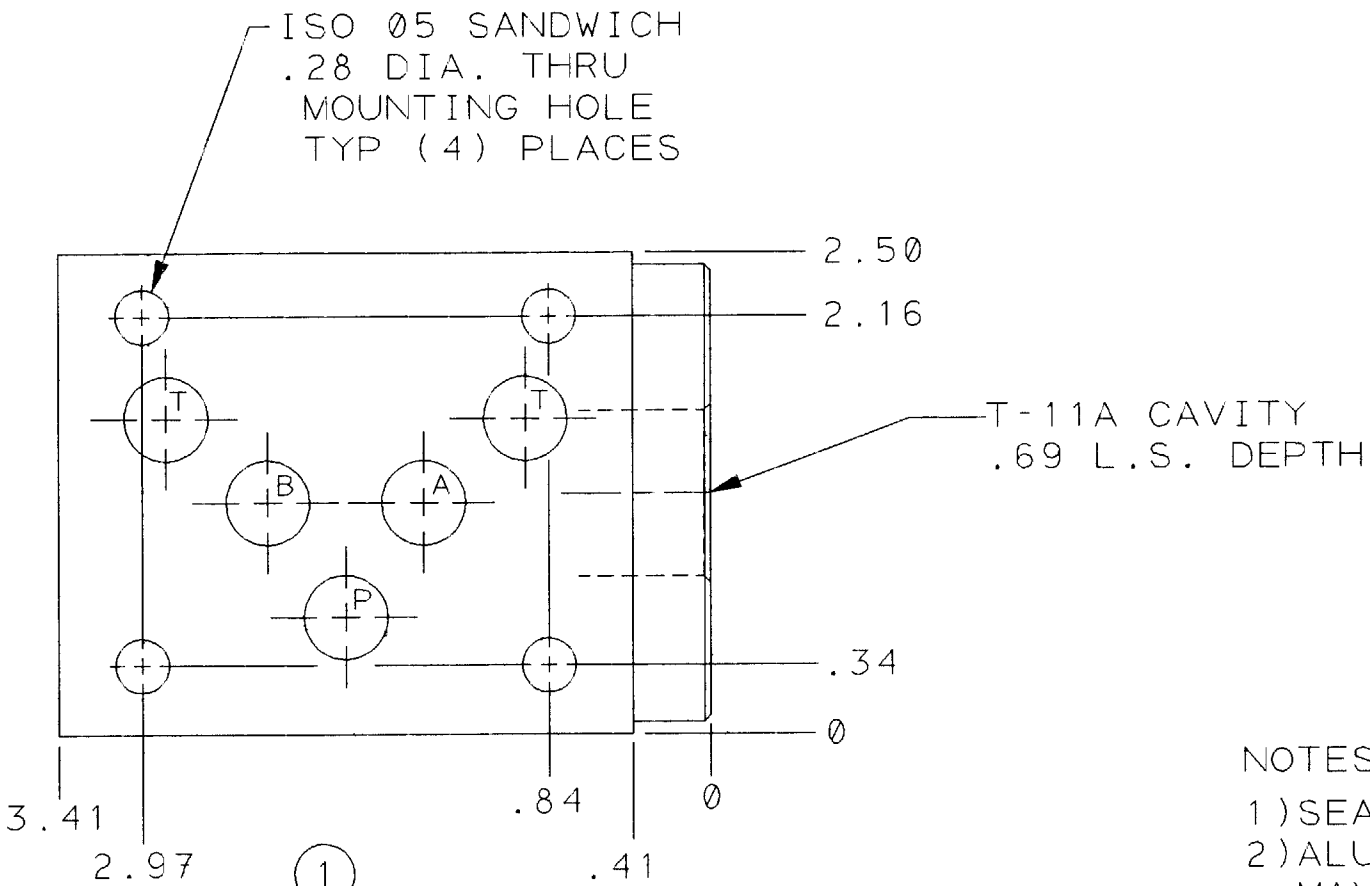
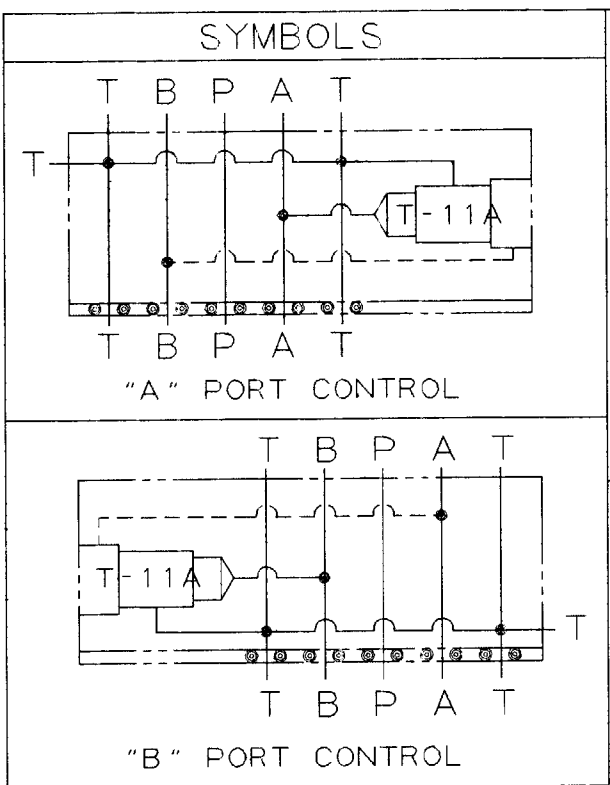


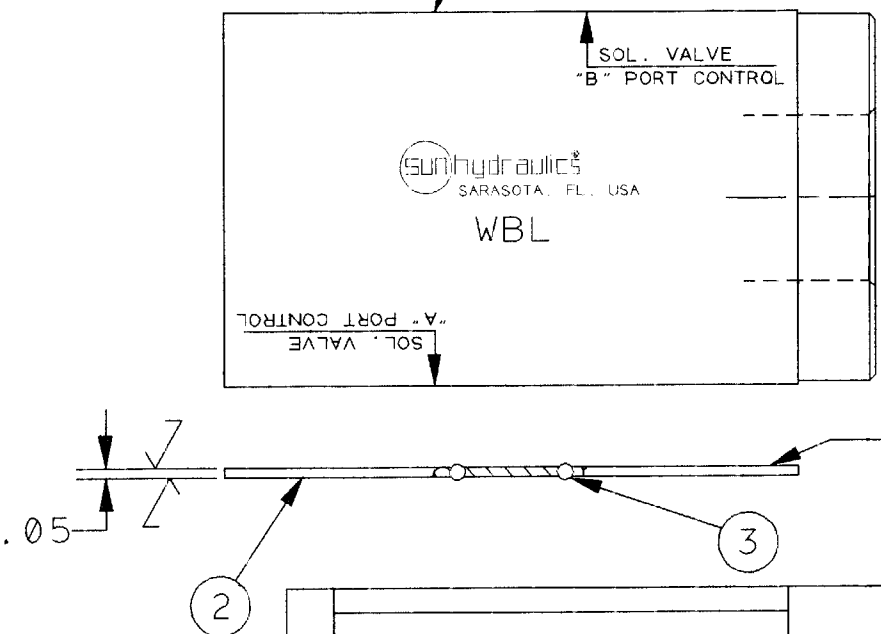

- NOTES:
- 1)SEALS:BUNA-N
 - 2)ALUMINUM BODIES-3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE.
 - 3)FACE "O" RING, -014,
FIVE PROVIDED
 - 4)SEAL PLATE MOUNTS ON
SIDE OPPOSITE SOLENOID
VALVE

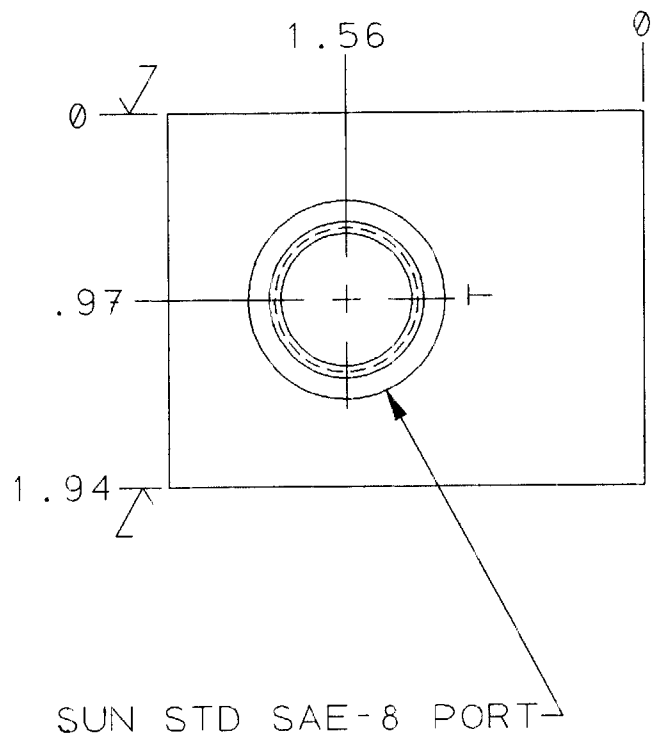

LET	REVISION	DATE	DRN	CHK	REL

UNLESS OTHERWISE SPECIFIED		TITLE	
DIMENSION TOL		ISO 05 SANDWICH, T-11A CAVITY	
.x = ±.030		"A" OR "B" TO "T" W/EXTERNAL "T" PORT	
.xx = ±.015		SCALE REF.	
.xxx = ±.005		1:1	
ANGLE TOL ± 1/2		DRAWN	
FINISH 80✓		CHECK	
REMOVE ALL BURRS		RELEASE	
		DATE	
		DATE	
		DATE	

ITEM	PART NO.	PART NAME	QTY
3	500-001-014	"O" RING	5
2	700-001	SEAL PLATE	1
1	150-417-002	BODY	1

REVISION	PART NO.
	WBL

