



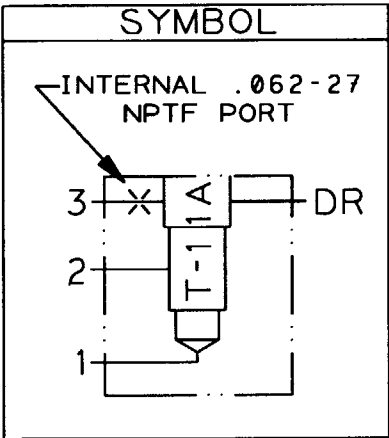




REVISION	PART NO.
B	WBS

NOTES:

- 1) ALUMINUM BODIES: 3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE
- 2) FOR OTHER OPTIONS, SEE
OPTIONS SHEET.

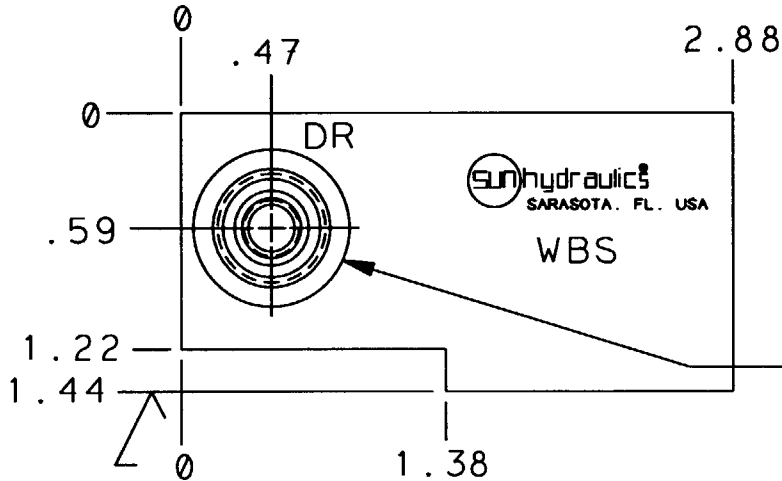

SUN STD SAE-6 EXTERNAL DRAIN PORT -
PLUG INTERNAL .062-27 NPTF PORT
BEFORE INSTALLING CARTRIDGE INTO
T-11A CAVITY.
OPTIONAL-FOR INTERNAL DRAIN TO #3
PORT-LEAVE INTERNAL .062-27 NPTF PORT
UNPLUGGED AND PLUG EXTERNAL DRAIN PORT

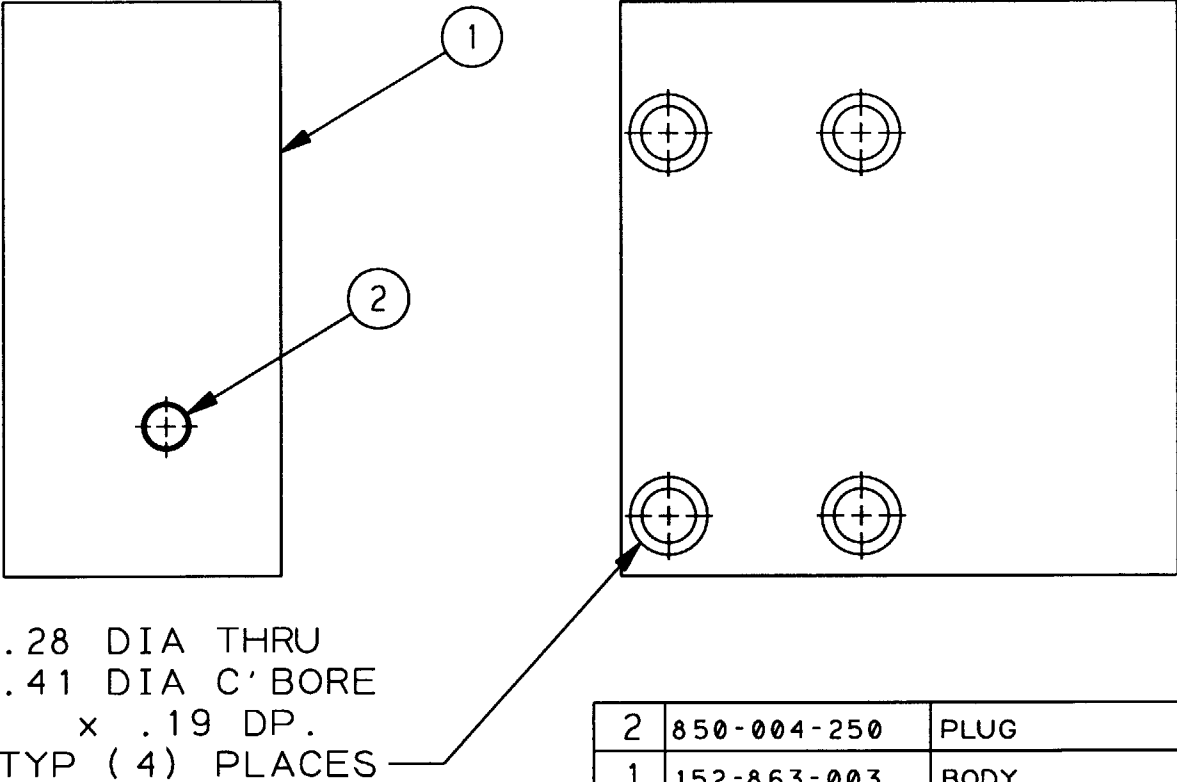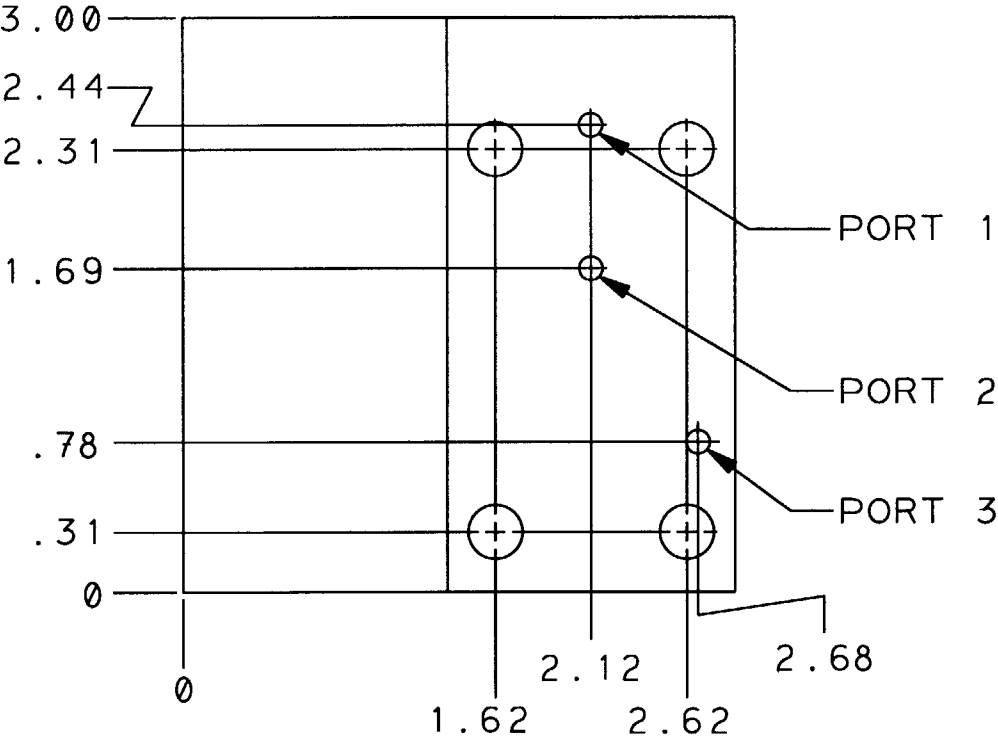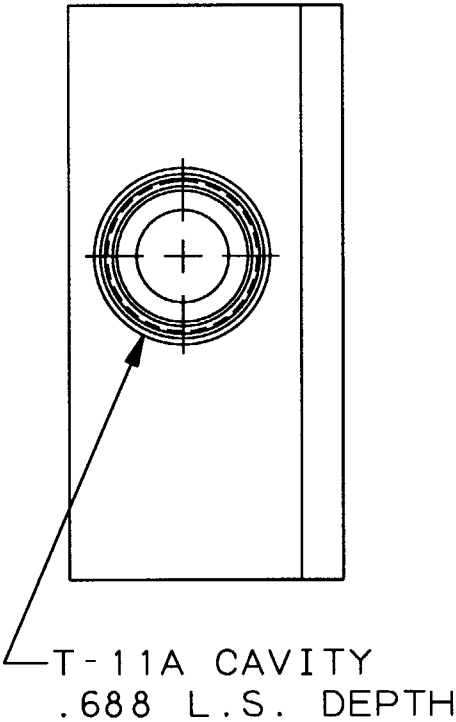

ITEM	PART NO.	PART NAME	QTY
2	850-004-250	PLUG	1
1	152-863-003	BODY	1

OUTLINE						REVISION	PART NO.
TITLE DIRECT-MOUNTED T-11A CAV. W/EXTERNAL DRAIN PORT						B	WBS
UNLESS OTHERWISE SPECIFIED			SCALE REF.			MATERIAL	
DIMENSION TOL			1:1			ALUMINUM	
.x ±.030			DRAWN			HEAT TREAT & FINISH	
.xx ±.015			CHECK				
.xxx ±.005			RELEASE				
ANGLE TOL ± 1/2			DATE				
FINISH 80✓			DATE				
REMOVE ALL BURRS			DATE				
B	REDESIGNED TO RELOCATE T-11A CAVITY	9-24-92	DAS				
A	ADDED INTERNAL DRAIN OPTION	6-4-92	DAS				
LET	REVISION	DATE	DRN	CHK	REL		

