




NOTES:

- 1) SEAL: BUNA-N
- 2) ALUMINUM BODIES:
3000 PSI MAXIMUM
CONTINUOUS SERVICE
PRESSURE.
- 3) FOR OTHER OPTIONS,
SEE OPTION SHEET.



.42 DIA THRU
TYP (4) PLACES-

.250-19 BSPP
GAGE PORT—

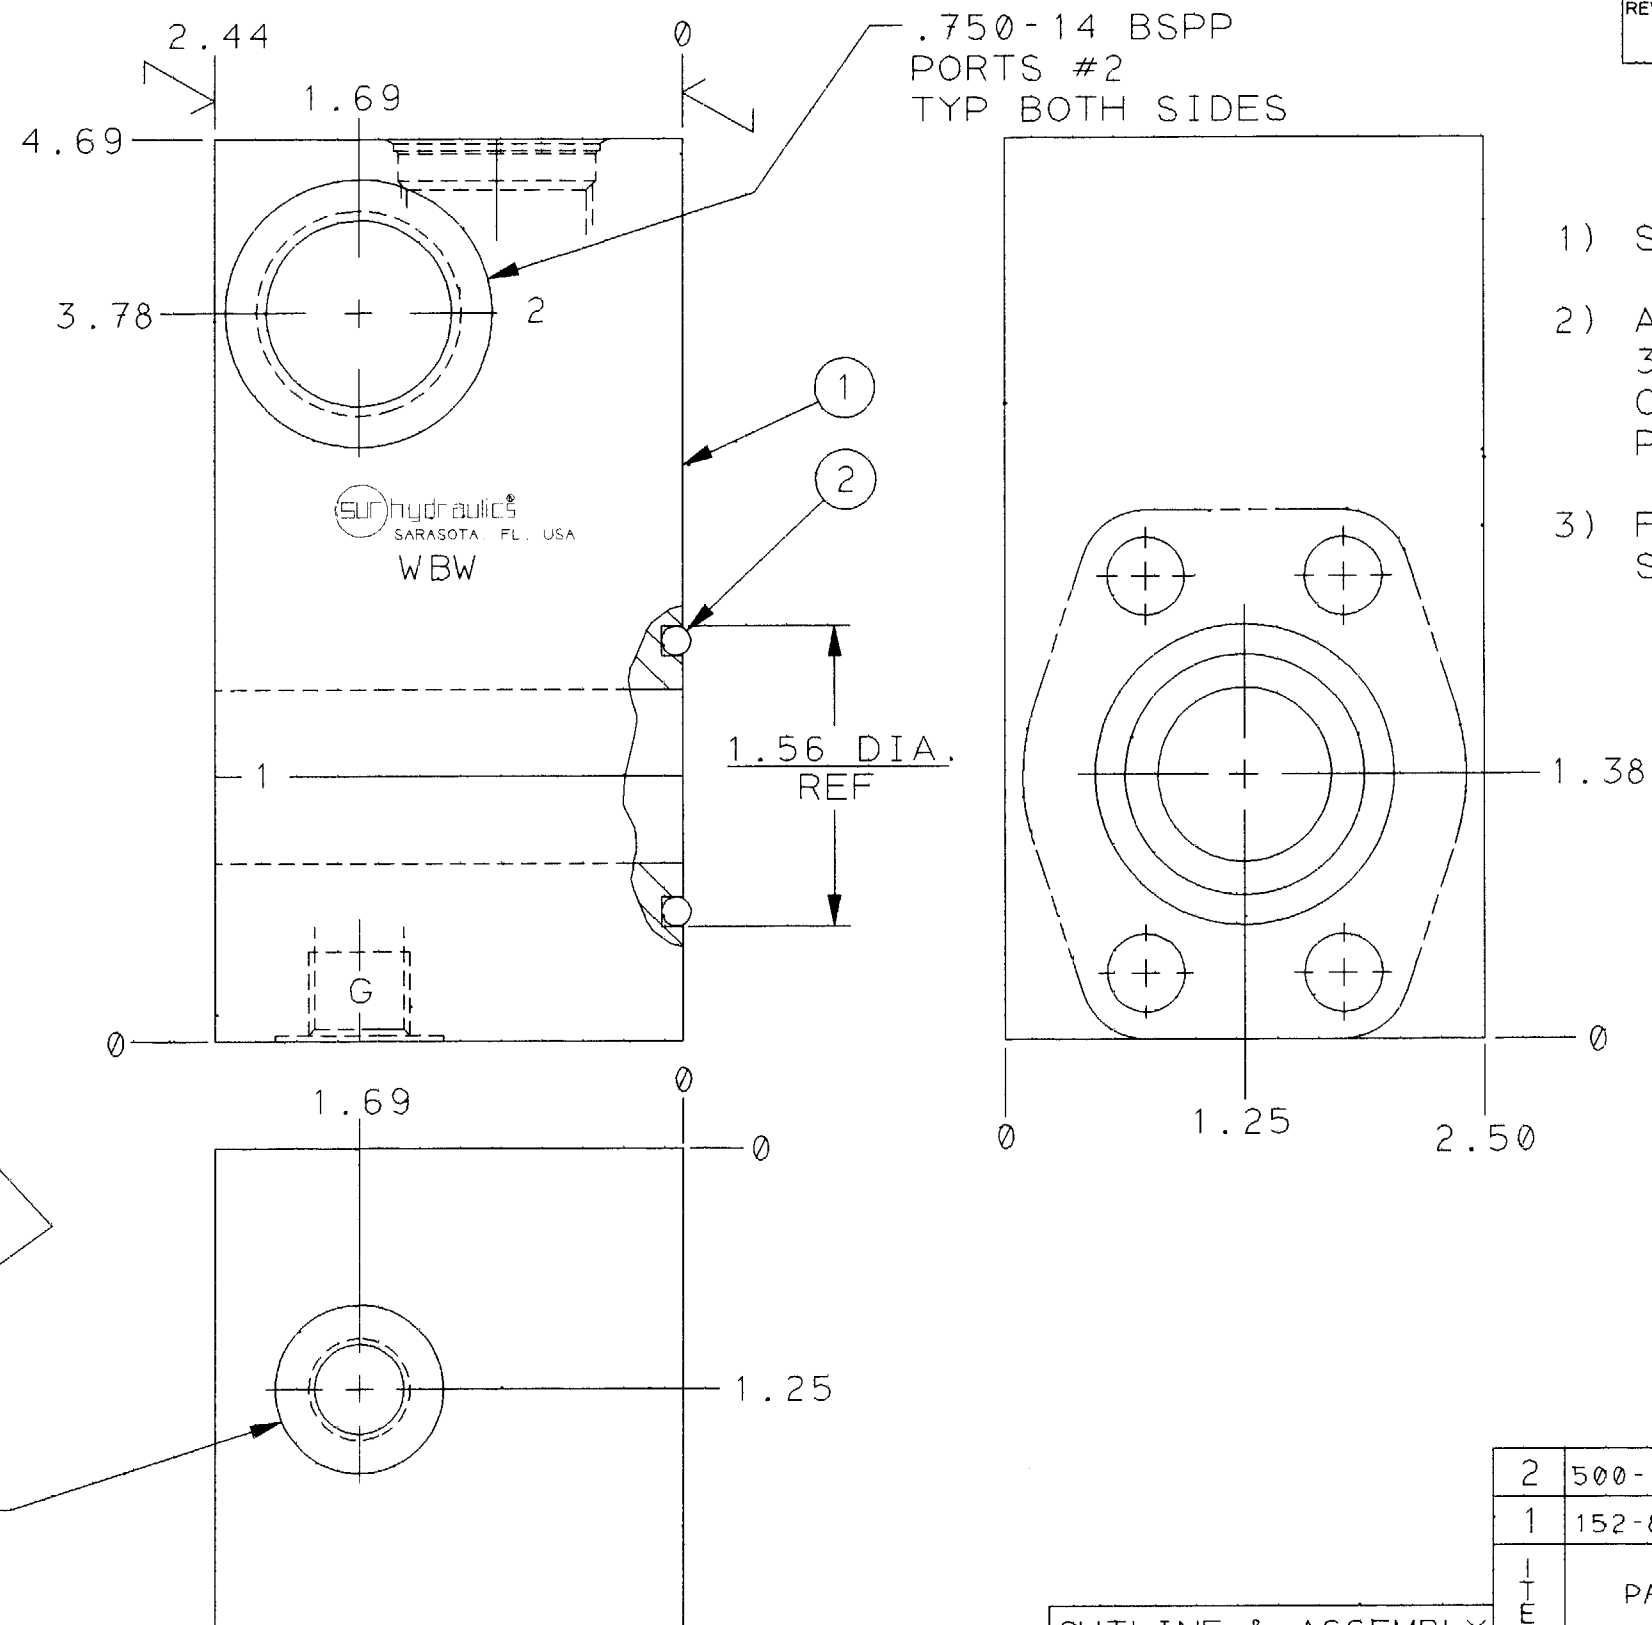

2	500-001-219	"O" RING	1
1	152-851-003	BODY	1
ITEM	PART NO.	PART NAME	QTY

OUTLINE & ASSEMBLY

TITLE DIRECT 1" CODE 61 4-BOLT FLANGE MOUNTED T-5A CAVITY
--

REVISION	PART NO.	WBW
----------	----------	-----

UNLESS OTHERWISE SPECIFIED

DIMENSION TO
 .x = ±.030
 .xx = ±.015
 .xxx = ±.005
 ANGLE TOL ±
 FINISH 80~
 REMOVE ALL
 BURRS

SCALE	R
1 : 1	

DRAWN	DAS
DATE	4-22-92

EF.

CHECK
DATE

RELEASE
3651
DATE
4-23-92

MATERIAL
ALUMI

HEAT TREAT

NUM

8. FINISH



115

1500
SAR
TELE

1901
CO
D UNIVERSITY
ASOTA, FLOR
EPHONE (813

public

BUIL!
CORPORATION
Y PARKWAY
IDA 34243. U
355-2983

®

ON
USA

SUN hydraulics®
CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243. USA
TELEPHONE (813) 355-2983