


REVISION PART NO.
A WDC

4-ØFF MTG HOLES .422
(10,7) DIA THRO C/BORED
.688 (17,5) DIA x .35
(9) DEEP.

SYMBOL

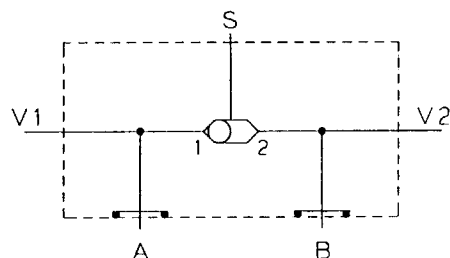




PORTS V1 & V2 = .50-14 NPTF

PORT S = SAE-4
EXTERNAL CONNECTION IN END
OF SHUTTLE CARTRIDGE

SIMILAR TO WMX

NOTES

- 1)ALUMINIUM BODIES MAX CONTINUOUS SERVICE PRESSURE 3000 PSI.(210 BAR)
- 2)THIS BODY WILL INTERFACE ONLY WITH .750 BSPP & .750 NPTF PORTS ON THE DANFOSS OMT MOTOR RANGE.
- 3)SEALS MATERIAL : BUNA-N.
- 4)FOR OTHER OPTIONS,SEE OPTIONS CHART
- 5)DIM'S IN BRACKETS THUS: (),ARE IN mm
- 6)DRAWING NOTATION:
3RD ANGLE PROJECTION

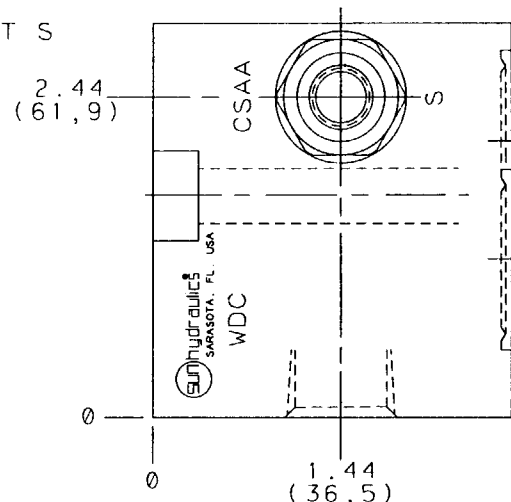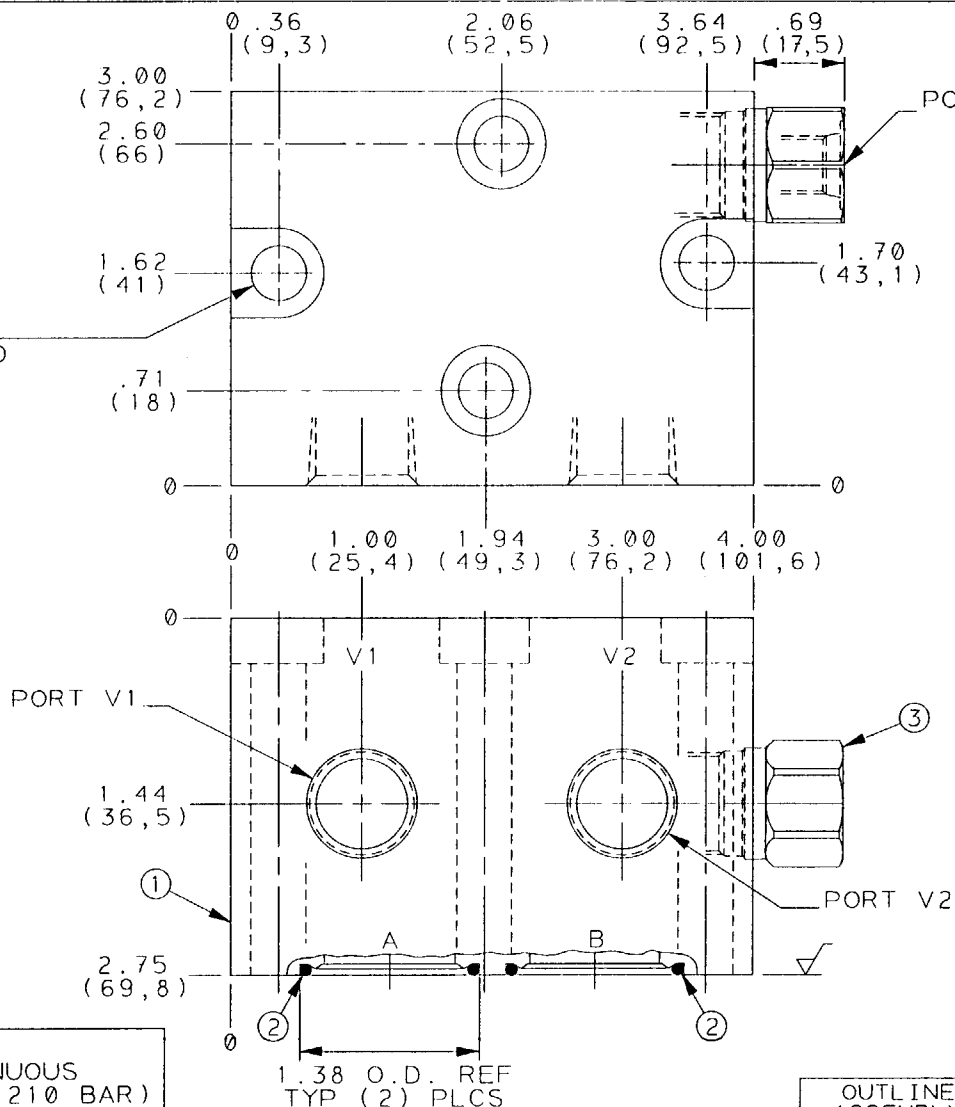

ITEM	PART No.	PART NAME	QTY
3	CSAA-EXN	SHUTTLE CART	1
2	500-001-123	O'RING SEAL	2
1	159-319-001	BODY	1

OUTLINE AND
ASSEMBLY DRG
TITLE BODY...BRAKE SHUTTLE ONLY
(DIRECT MTD DANFOSS OMT MOTOR)

REVISION PART NO.
A WDC

A	SYMBOL	STATED	.75 NPTF	NOW	.50 NPTF	83 JUN 94	GH	DATE	DRN	CHK	REL
LET											

UNLESS OTHERWISE SPECIFIED
DIMENSION TOL
x ± .030
xx ± .015
xxx ± .005
ANGLE TOL ± 1/4
FINISH 80V
REMOVE ALL BURRS

SCALE	REF.
1 2	CATALOGUE DESIGN
DRAWN	CHECK
G. Hadden	CCM
DATE	DATE
29 NOV 91	87 JUL 93

RELEASE	HEAT TREAT & FINISH
DATE	

SUN hydraulics
CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (813) 355-2983