


4 - OFF MTG HOLES .422 _____
(10,7) DIA THRO C/BORED
.688 (17,5) DIA x .35
(9) DEEP.


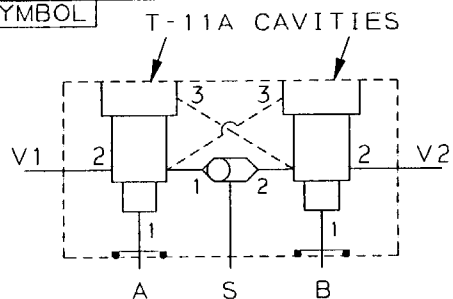


PORT S = SAE-4
EXTERNAL CONNECTION IN END
OF SHUTTLE CARTRIDGE


SIMILAR TO WKY

NOTES

- 1)ALUMINIUM BODIES MAX CONTINUOUS SERVICE PRESSURE 3000 PSI.(210 BAR)
- 2)THIS BODY WILL INTERFACE ONLY WITH .750 BSPP & .750 NPTF PORTS ON THE DANFOSS OMT MOTOR RANGE.
- 3)SEALS MATERIAL : BUNA-N.
- 4)FOR OTHER OPTIONS,SEE OPTIONS CHART
- 5)DIM'S IN BRACKETS THUS: () ,ARE IN mm
- 6)DRAWING NOTATION:
3RD ANGLE PROJECTION

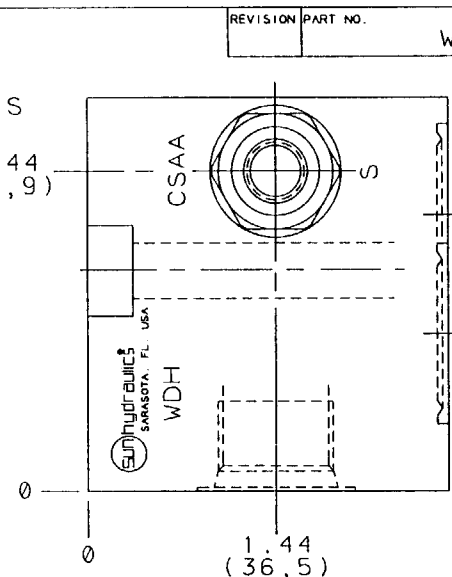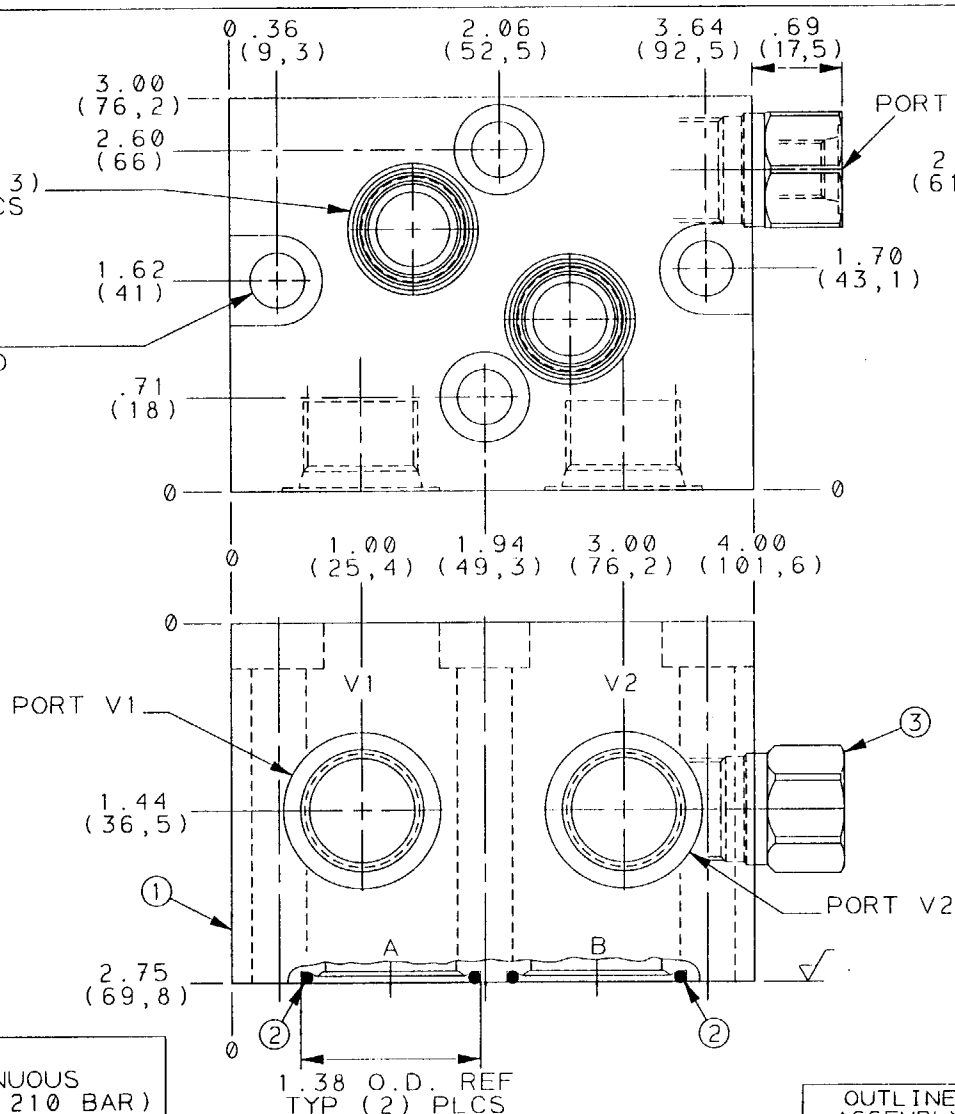

3	CSAA-EXN	SHUTTLE CART	1
2	500-001-123	O-RING SEAL	2
1	159-350-002	BODY	1
ITEM	PART No.	PART NAME	QTY

				UNLESS OTHERWISE SPECIFIED				TITLE BODY... DUAL T-11A CAVITIES WITH BRAKE SHUTTLE (DIRECT MTD DANFOSS OMT MOTOR)				REVISION		PART NO.		WDH	
				DIMENSION TOL x ± .030 xx ± .015 xxx ± .005 ANGLE TOL ± 1/2° FINISH 80~ REMOVE ALL BURRS				SCALE REF. 1 2 CATALOGUE DESIGN		MATERIAL ALUMINIUM / S.G.I.		 CORPORATION 1500 UNIVERSITY PARKWAY SARASOTA, FLORIDA 34243, USA TELEPHONE (813) 355-2983					
				DRAWN G. Hadden		CHECK CCM		RELEASE		HEAT TREAT & FINISH 							
LET				REVISION				DATE 26 NOV 98		DATE 27 JUL 93		DATE					

