



T-11A CAVITIES .72 (18,3)
L.S. DEPTH. TYP (2) PLCS

4-ØFF MTG HOLES .422
(10,7) DIA THRO C/BORED
.688 (17,5) DIA x .35
(9) DEEP.

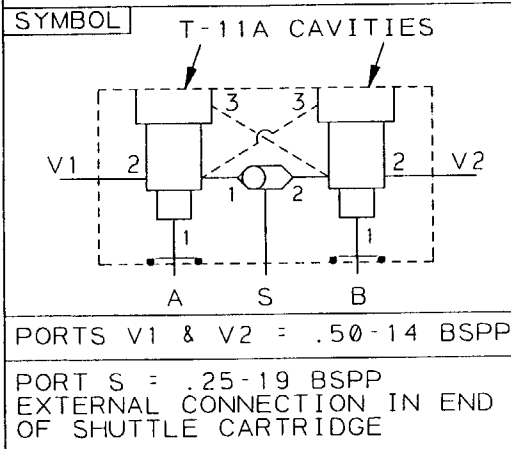

SIMILAR TO WKZ

- NOTES**
- 1) ALUMINIUM BODIES MAX CONTINUOUS SERVICE PRESSURE 3000 PSI. (210 BAR)
 - 2) THIS BODY WILL INTERFACE ONLY WITH .750 BSPP & .750 NPTF PORTS ON THE DANFOSS OMT MOTOR RANGE.
 - 3) SEALS MATERIAL: BUNA-N.
 - 4) FOR OTHER OPTIONS, SEE OPTIONS CHART
 - 5) DIM'S IN BRACKETS THUS: (), ARE IN mm
 - 6) DRAWING NOTATION:
3RD ANGLE PROJECTION

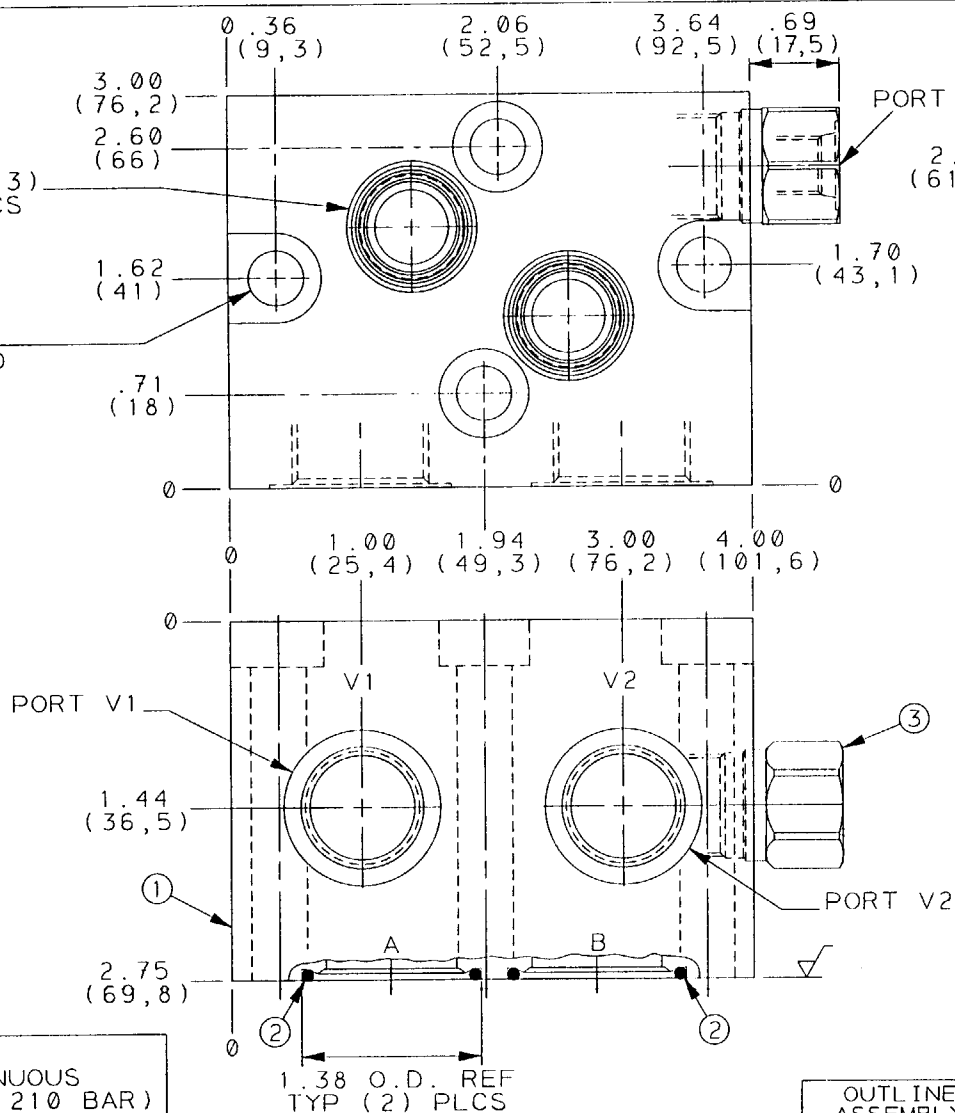

3	CSAA-BXN	SHUTTLE CART	1
2	500-001-123	O-RING SEAL	2
1	159-350-003	BODY	1
ITEM	PART No.	PART NAME	QTY

LET		REVISION		DATE	DRN	CHK	REL	UNLESS OTHERWISE SPECIFIED		TITLE BODY, DUAL T-11A CAVITIES WITH BRAKE SHUTTLE (DIRECT MTD DANFOSS OMT MOTOR)		REVISION PART NO.		WDK	
								DIMENSION TOL		SCALE REF		MATERIAL		SUN hydraulics CORPORATION	
								.X ± .030		1 2 CATALOGUE DESIGN		ALUMINIUM / S.G.I.		1500 UNIVERSITY PARKWAY	
								.XX ± .015		DRAWN G. Madler		CHECK CCM		SARASOTA, FLORIDA 34243, USA	
								.XXX ± .005		DATE 26 NOV 98		RELEASE DATE 07 JUL 93		TELEPHONE (813) 355-2983	
								ANGLE TOL ± 1/4							
								FINISH 80V							
								REMOVE ALL BURRS							