


REVISION	PART NO.
	WDL

T-11A CAVITIES .72 (18,3)
L.S. DEPTH. TYP (2) PLCS



4-OFF MTG HOLES .422
(10,7) DIA THRO C/BORED
.688 (17,5) DIA x .35
(9) DEEP.

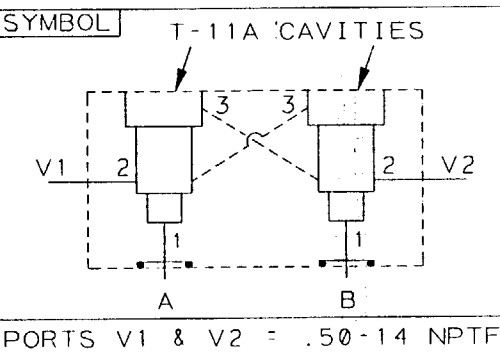

SIMILAR TO WКУ

NOTES

- 1)ALUMINIUM BODIES MAX CONTINUOUS SERVICE PRESSURE 3000 PSI.(210 BAR)
- 2)THIS BODY WILL INTERFACE ONLY WITH .750 BSPP & .750 NPTF PORTS ON THE DANFOSS OMT MOTOR RANGE.
- 3)SEALS MATERIAL : BUNA-N.
- 4)FOR OTHER OPTIONS,SEE OPTIONS CHART
- 5)DIM'S IN BRACKETS THUS: (),ARE IN mm
- 6)DRAWING NOTATION:

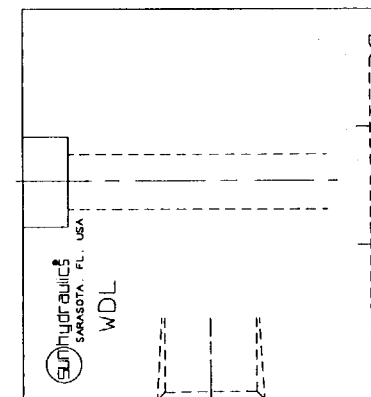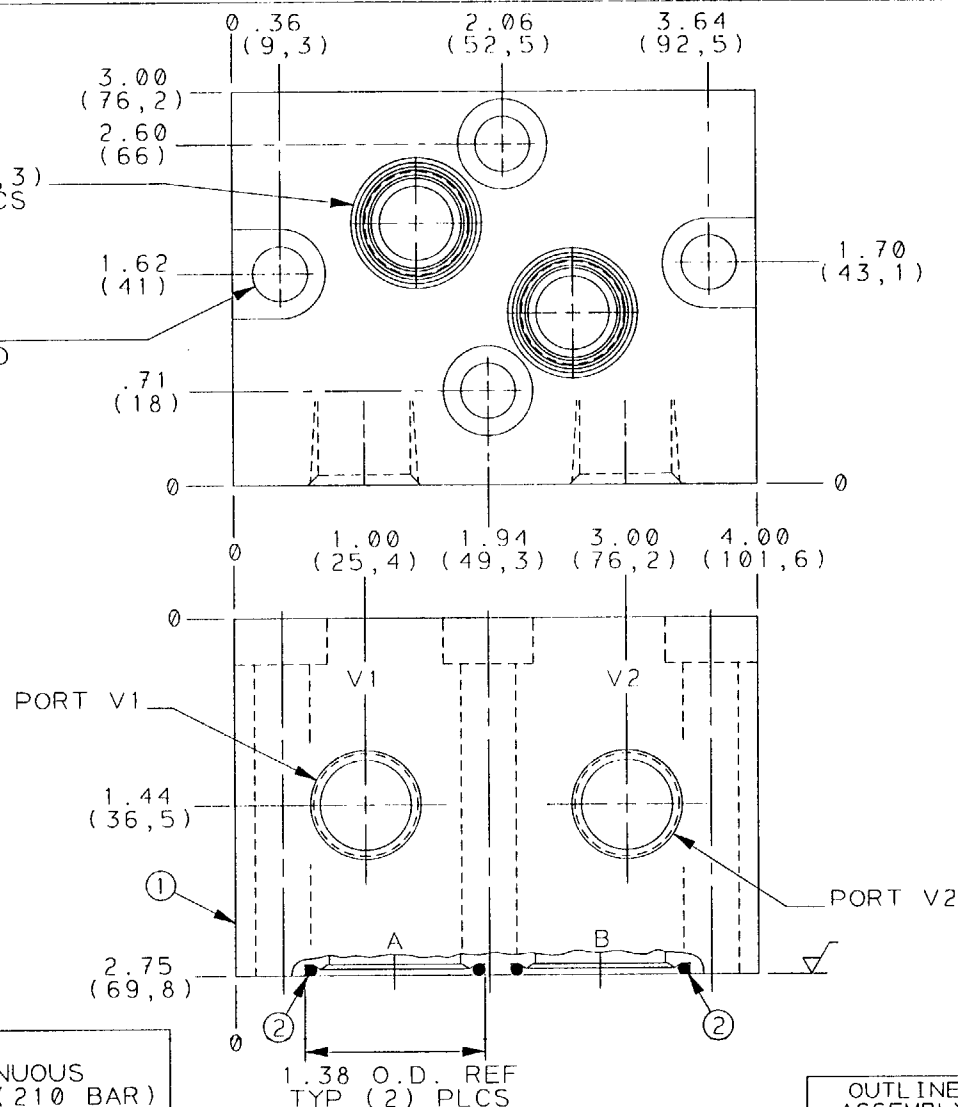

2	500-001-123	O'RING SEAL	2
1	159-349-001	BODY	1
ITEM	PART No.	PART NAME	QTY

OUTLINE AND ASSEMBLY DRG

TITLE BODY..DUAL T-11A CAVITIES (DIRECT MTD DANFOSS OMT MOTOR)

REVISION PART NO. WDL

UNLESS OTHERWISE SPECIFIED
DIMENSION TOL
x ±.030
xx ±.015
xxx ±.005
ANGLE TOL ±%
FINISH 80V
REMOVE ALL BURRS

SCALE REF
1 2 CATALOGUE DESIGN
DRAWN G.Madden
CHECK CCM
DATE DATE DATE
26 NOV 98 07 JUL 93

MATERIAL
ALUMINIUM / S.G.I.
HEAT TREAT & FINISH

SUN hydraulics
CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (813) 355-2383

LET	REVISION	DATE	DRN	CHK	REL