


REVISION	PART NO.
	WDM

T-11A CAVITIES .72 (18,3)
L.S. DEPTH. TYP (2) PLCS

4-ØFF MTG HOLES .422
(10,7) DIA THRO C/BORED
.688 (17,5) DIA x .35
(9) DEEP.

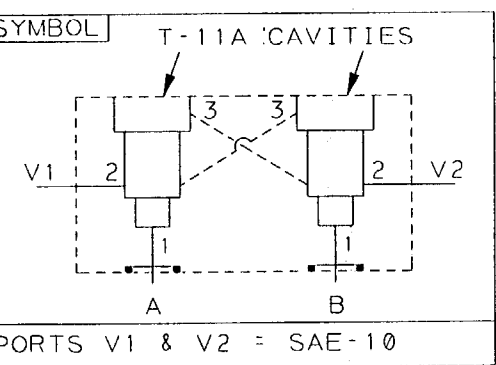

SIMILAR TO WKV

NOTES

1) ALUMINIUM BODIES MAX CONTINUOUS SERVICE PRESSURE 3000 PSI.(210 BAR)



2) THIS BODY WILL INTERFACE ONLY WITH .750 BSPP & .750 NPTF PORTS ON THE DANFOSS OMT MOTOR RANGE.

3) SEALS MATERIAL : BUNA-N.

4) FOR OTHER OPTIONS,SEE OPTIONS CHART

5) DIM'S IN BRACKETS THUS:(),ARE IN mm

6) DRAWING NOTATION: 3RD ANGLE PROJECTION

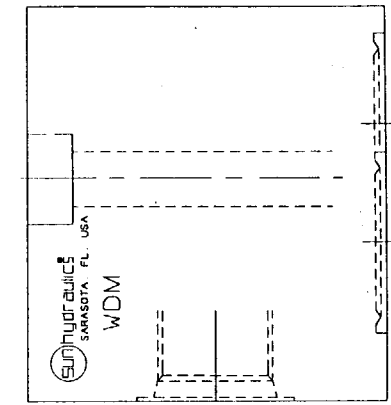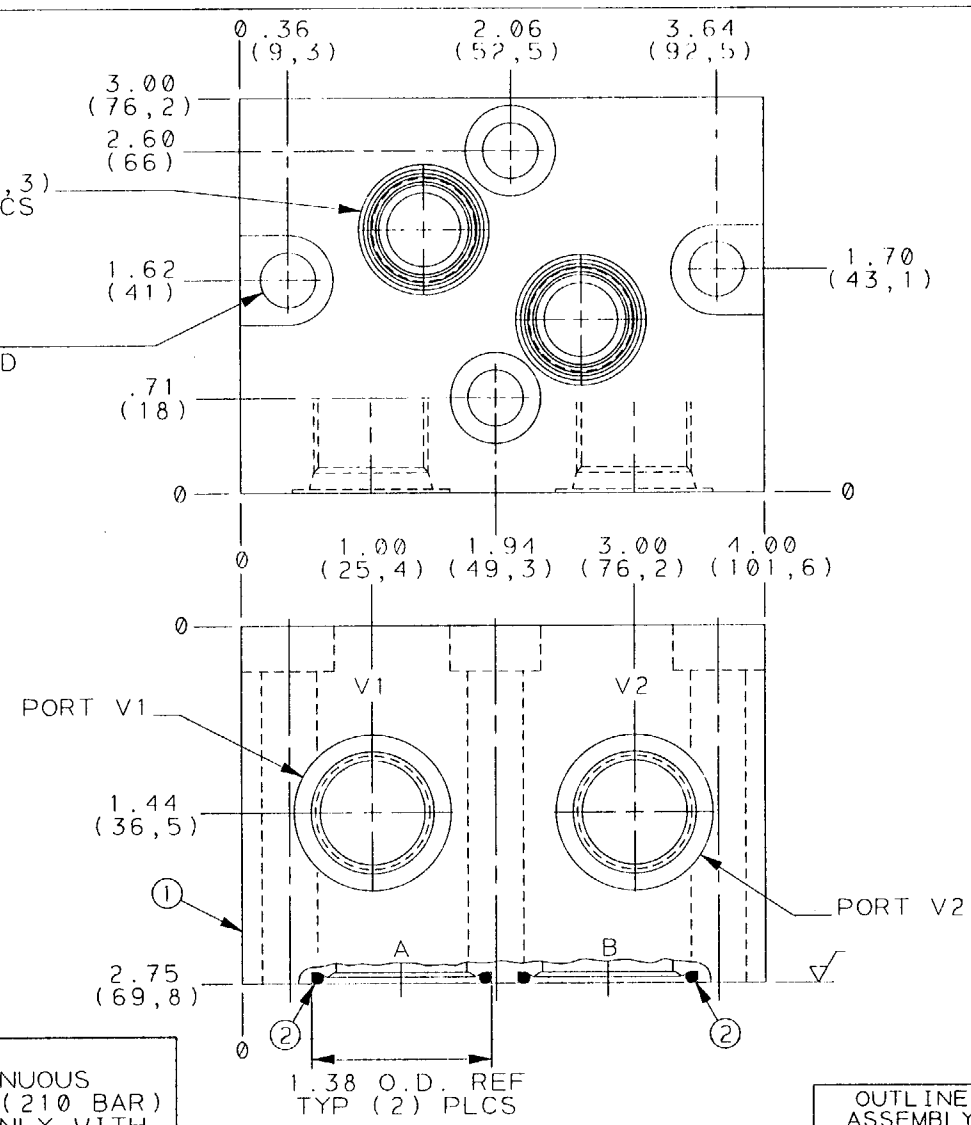

2	500-001-123	O'RING SEAL	2
1	159-349-002	BODY	1
ITEM	PART No.	PART NAME	QTY

OUTLINE AND ASSEMBLY DRG			
TITLE BODY..DUAL T-11A CAVITIES (DIRECT MTD DANFOSS OMT MOTOR)			
SCALE REF.		MATERIAL	
1 2	CATALOGUE DESIGN	ALUMINIUM / S.G.I.	
DRAWN	CHECK	RELEASE	HEAT TREAT & FINISH
G.Hodder	CCM		
DATE	DATE	DATE	
26 NOV 90	07 JUL 93		

REVISION	PART NO.
	WDM
1500 UNIVERSITY PARKWAY SARASOTA, FLORIDA 34243, USA TELEPHONE (813) 355-2983	

LET	REVISION	DATE	DRN	CHK	REL

UNLESS OTHERWISE SPECIFIED

DIMENSION TOL

X ± .030

XX ± .015

XXX ± .005

ANGLE TOL ± %

FINISH BOV

REMOVE ALL BURRS