


T-11A CAVITIES .72 (18,3)
L.S. DEPTH. TYP (2) PLCS



4-ØFF MTG HOLES .422
(10,7) DIA THRO C/BORED
.688 (17,5) DIA x .35
(9) DEEP.

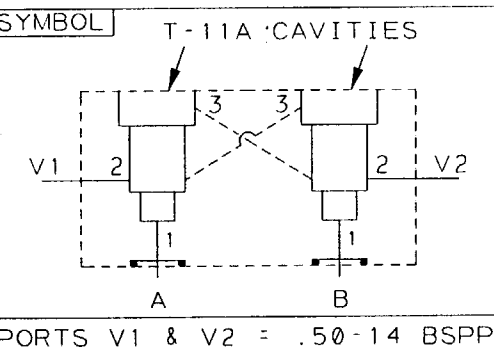

SIMILAR TO WKW

NOTES

- 1) ALUMINIUM BODIES MAX CONTINUOUS SERVICE PRESSURE 3000 PSI. (210 BAR)
- 2) THIS BODY WILL INTERFACE ONLY WITH .750 BSPP & .750 NPTF PORTS ON THE DANFOSS OMT MOTOR RANGE.
- 3) SEALS MATERIAL : BUNA-N.
- 4) FOR OTHER OPTIONS, SEE OPTIONS CHART
- 5) DIM'S IN BRACKETS THUS: (), ARE IN mm
- 6) DRAWING NOTATION: 3RD ANGLE PROJECTION

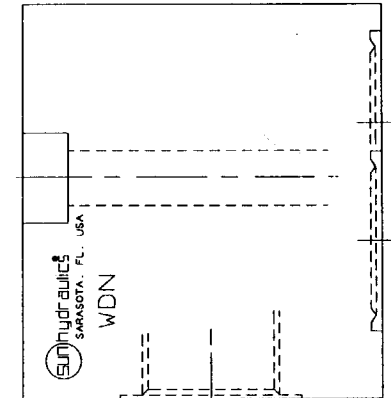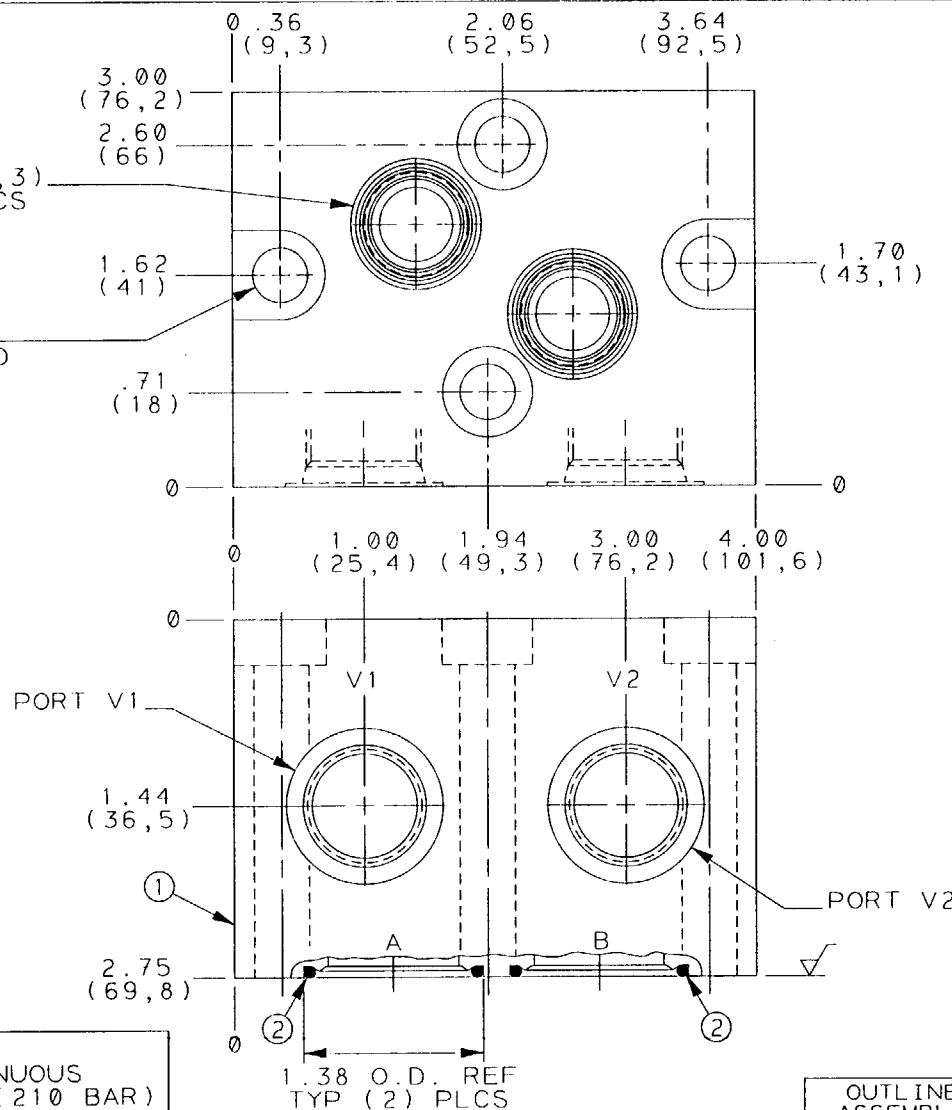

2	500-001-123	O-RING SEAL	2
1	159-349-003	BODY	1
ITEM	PART No.	PART NAME	QTY

OUTLINE AND ASSEMBLY DRG			
TITLE BODY..DUAL T-11A CAVITIES (DIRECT MTD DANFOSS OMT MOTOR)			
SCALE REF.	1 2 CATALOGUE DESIGN		
DRAWN G. Madden	CHECK CCM	RELEASE	
DATE 26 NOV 88	DATE 07 JUL 93	DATE	

REVISION	PART NO	WDN
SUN hydraulics CORPORATION 1500 UNIVERSITY PARKWAY SARASOTA, FLORIDA 34243, USA TELEPHONE (813) 355-2983		