
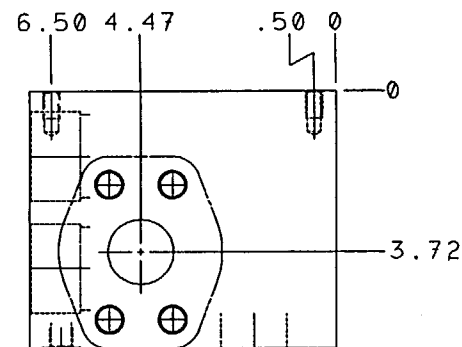
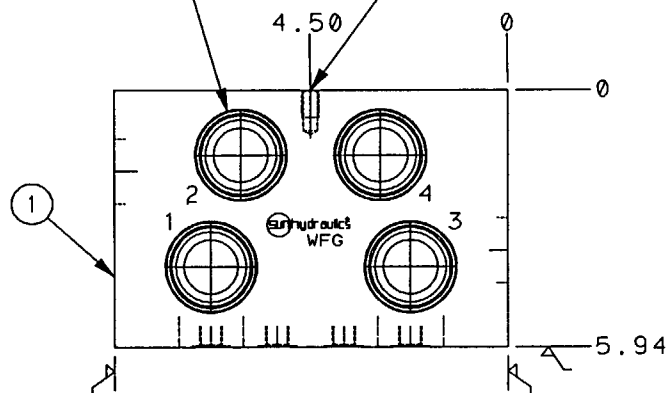


REVISION	PART NO.
	WFG

T19-A CAVITY
1.156 LS. DEPTH
TYP (4) PLACES.


MOUNTING PROVISIONS:
M10x1.5x .62 DEEP
TYP (2) PLCS.

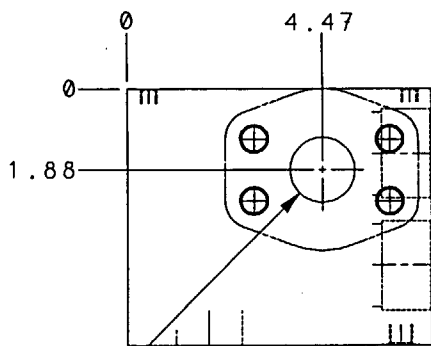

1.50 CODE-62, 4-BOLT
FLANGE PATTERN,
TYPICAL (4) PLACES.
MTG PROVISIONS:
M16x2.0x 1.38 DP
TYPICAL (16) PLACES

STAMPING NOTE: DO NOT
STAMP BELOW THIS LINE }


.25-19 BSPP PORT
TYP (4) PLACES.

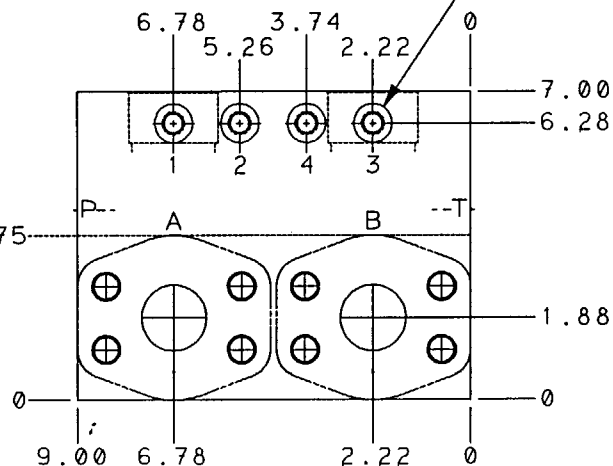

NOTES:

- 1) ALUMINIUM BODIES-3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE.

SYMBOL

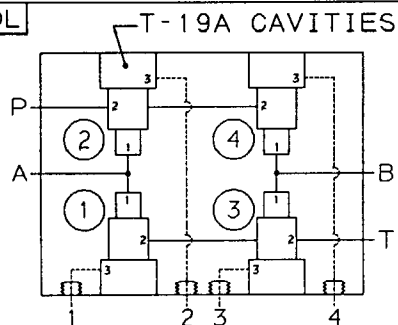

LET	REVISION	DATE	DRN	CHK	REL

UNLESS OTHERWISE SPECIFIED	
DIMENSION	TOL
x	±.030
xx	±.015
xxx	±.005
ANGLE TOL ± 1/2°	
FINISH 80✓	
REMOVE ALL BURRS	

OUTLINE DRAWING			E	PART NO.	PART NAME	Y
TITLE 4XT-19A CAVITY, 4-WAY DIRECTIONAL VALVE CIRCUIT (1.50 CODE-62 FLANGES)				REVISION	PART NO.	
				WFG		
SCALE REF.		MATERIAL		 sun hydraulics [®] CORPORATION 1500 UNIVERSITY PARKWAY SARASOTA, FLORIDA 34243, USA TELEPHONE (813) 355-2983		
1:3 WFE ; WFF		ALUM / SG. IRON				
DRAWN		HEAT TREAT & FINISH				
G. Madden						
CHECK	RELEASE					
CCM						
DATE	DATE	DATE				
30 OCT 91	06 NOV 91					