


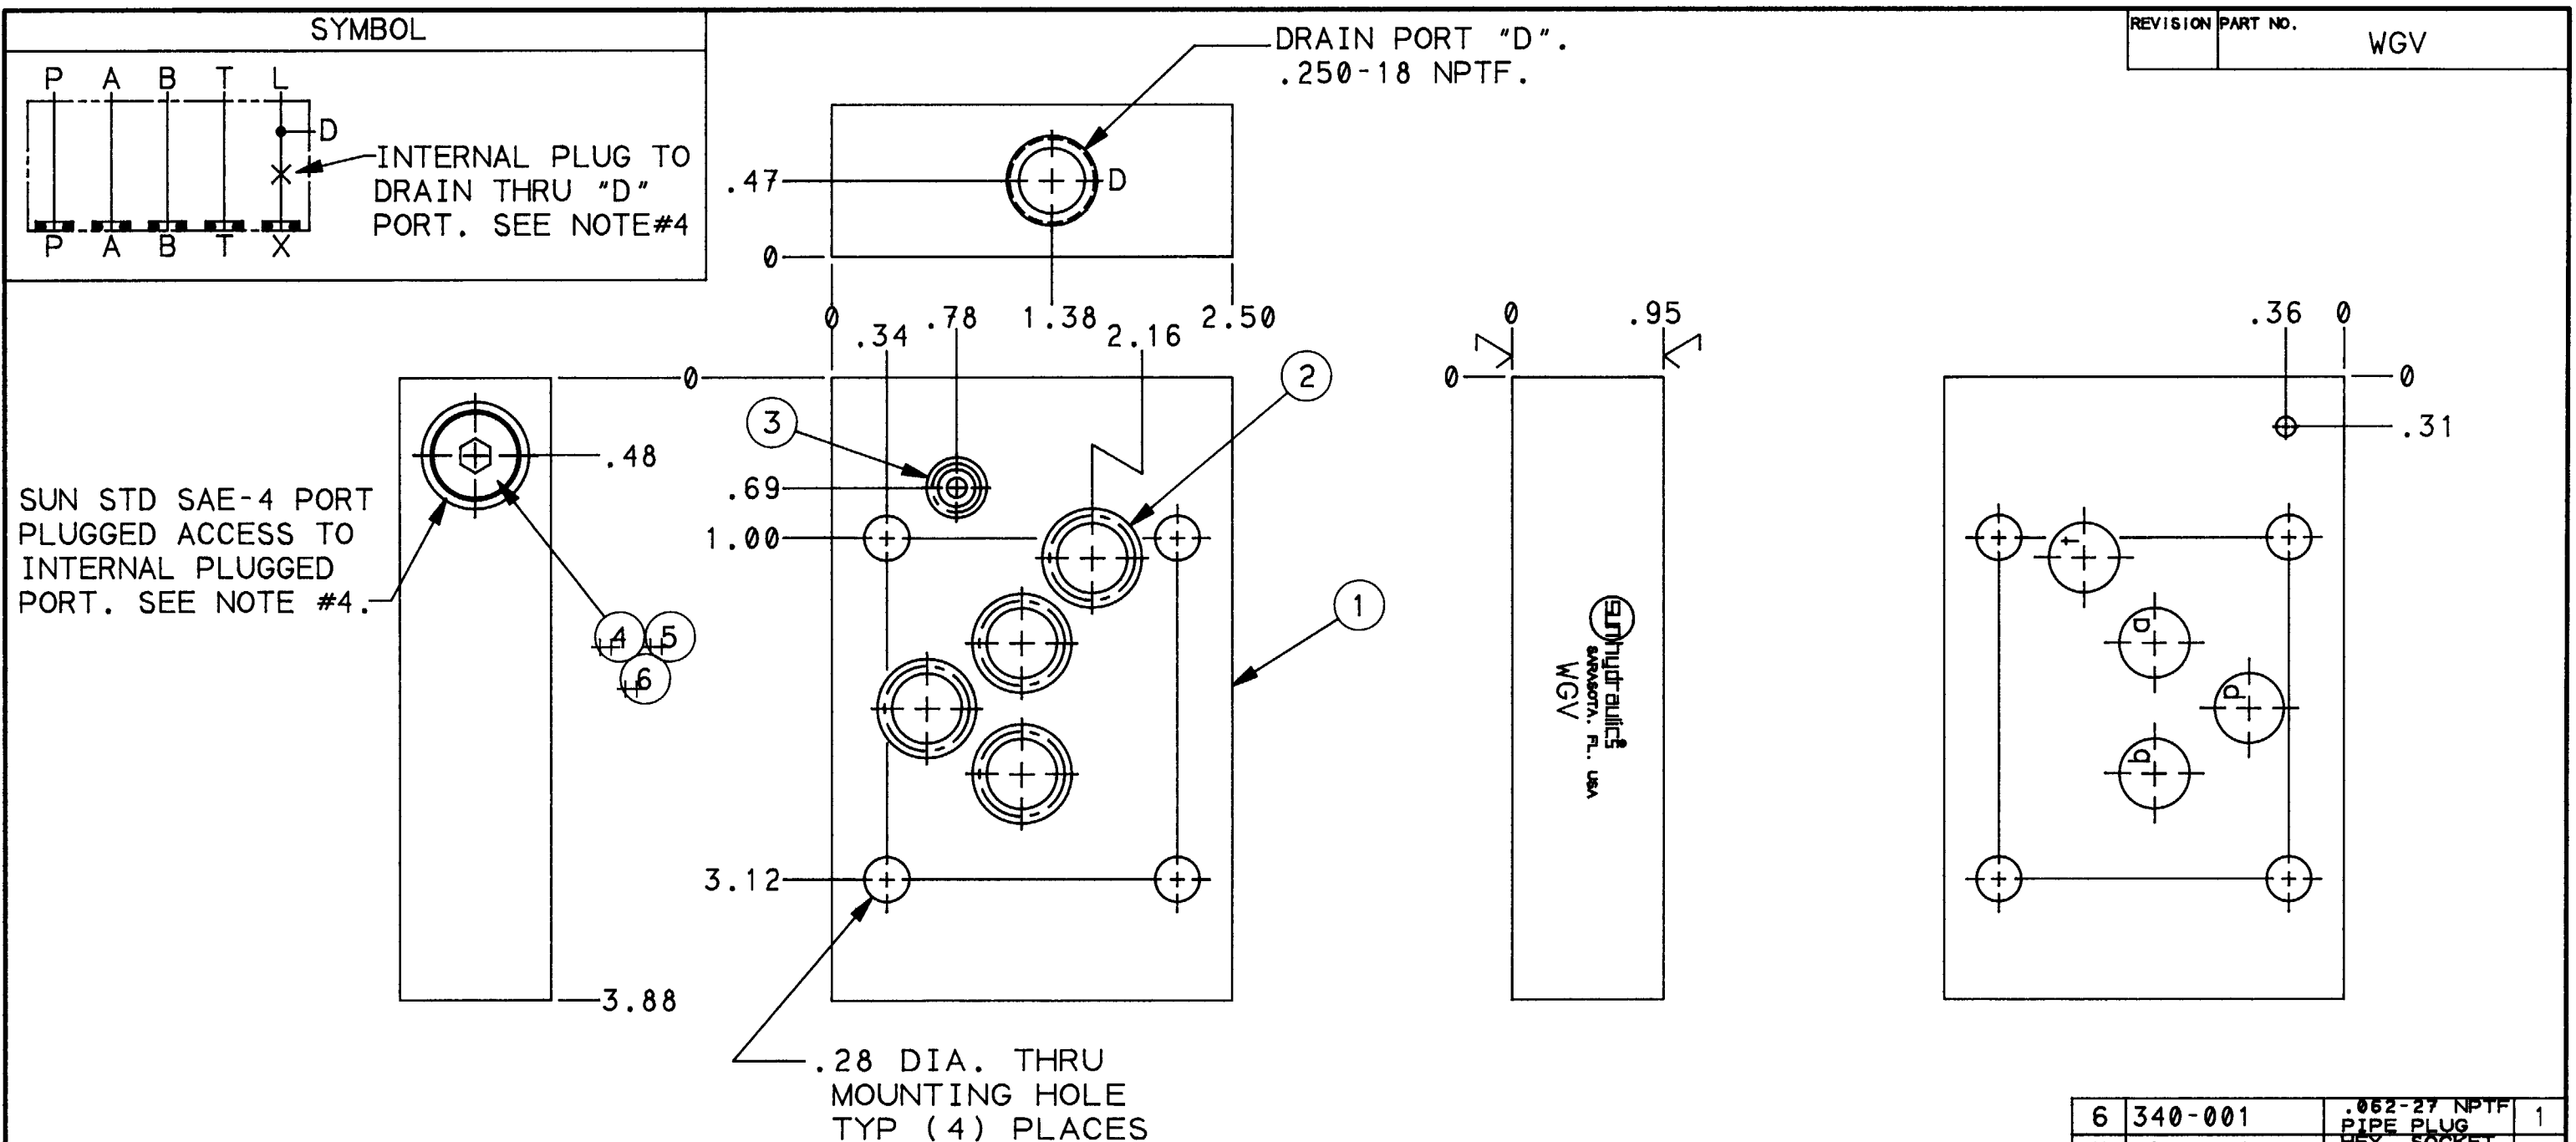

NOTES :

- 1) SEALS: BUNA-N
- 2) ALUMINUM BODIES-3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE.
- 3) OPTIONS AVAILABLE PER CATALOG.
- 4) BODY AS SHOWN, CONFIGURED FOR EXTERNAL
DRAIN THRU "D" PORT. FOR INTERNAL
DRAIN REMOVE INTERNAL PLUG (ITEM #6).
ADD PLUGS TO "D" PORT AND ACCESS PORT.

6	340-001	.052-27 NPTF PIPE PLUG	1
5	330-006-004	HEX. SOCKET O RING PLUG	1
4	500-002-904	"O" RING	1
3	500-001-010	"O" RING	1
2	500-001-014	"O" RING	4
1	152-688-001	BODY	1
Y	152-688-001	152-688-001	1
	PART NO.	PART NAME	QTY

						UNLESS OTHERWISE SPECIFIED	TITLE CONVERSION BLOCK "X" PORT TO BOSCH "L" PORT 1/4 NPTF	REVISION	PART NO. WGV	
						DIMENSION TOL .X = ±.030 .XX = ±.015 .XXX = ±.005 ANGLE TOL ± 1/2 FINISH 80✓ REMOVE ALL BURRS	SCALE 1/1	REF. ZJB	MATERIAL ALUMINUM	 SUN hydraulics [®] CORPORATION 1500 UNIVERSITY PARKWAY SARASOTA, FLORIDA 34243, USA TELEPHONE (813) 355-2983
					DRAWN BR5	CHECK R/B	RELEASE 3265	HEAT TREAT & FINISH 		
					DATE 8-15-91	DATE 8/30/91	DATE 9/3/91			
LET	REVISION					DATE	DRN	CHK	REL	

