

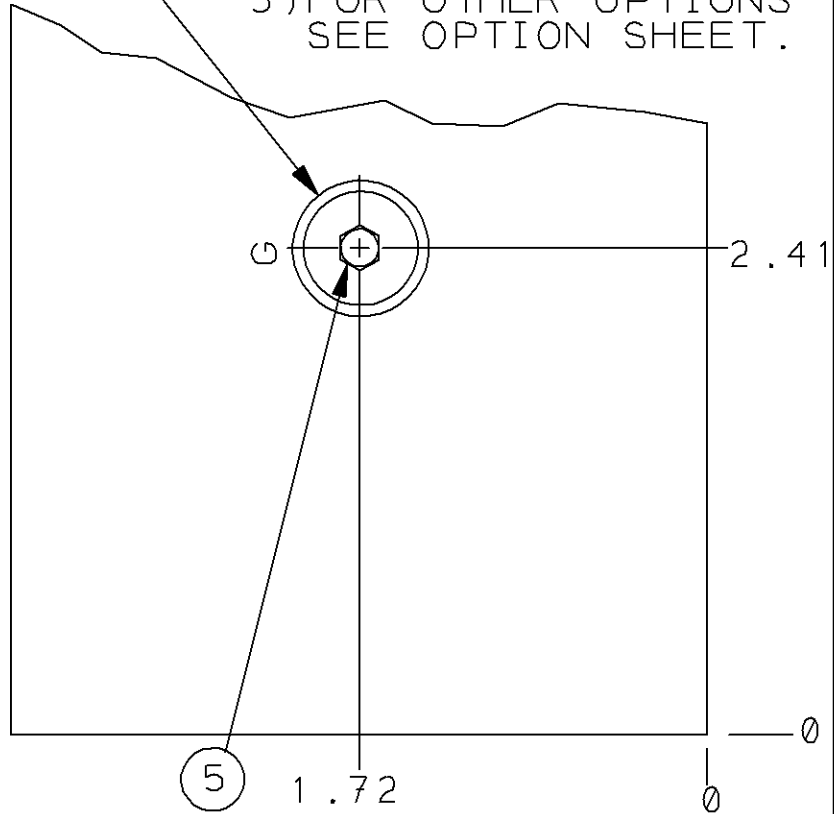


SAE-4 GAGE
PORT.
(PLUGGED)

- NOTES :
- 1)SEALS = BUNA N
 - 2)ALUMINUM BODIES -
3000 PSI MAXIMUM
CONTINUOUS SERVICE
PRESSURE .
 - 3)FOR OTHER OPTIONS
SEE OPTION SHEET.

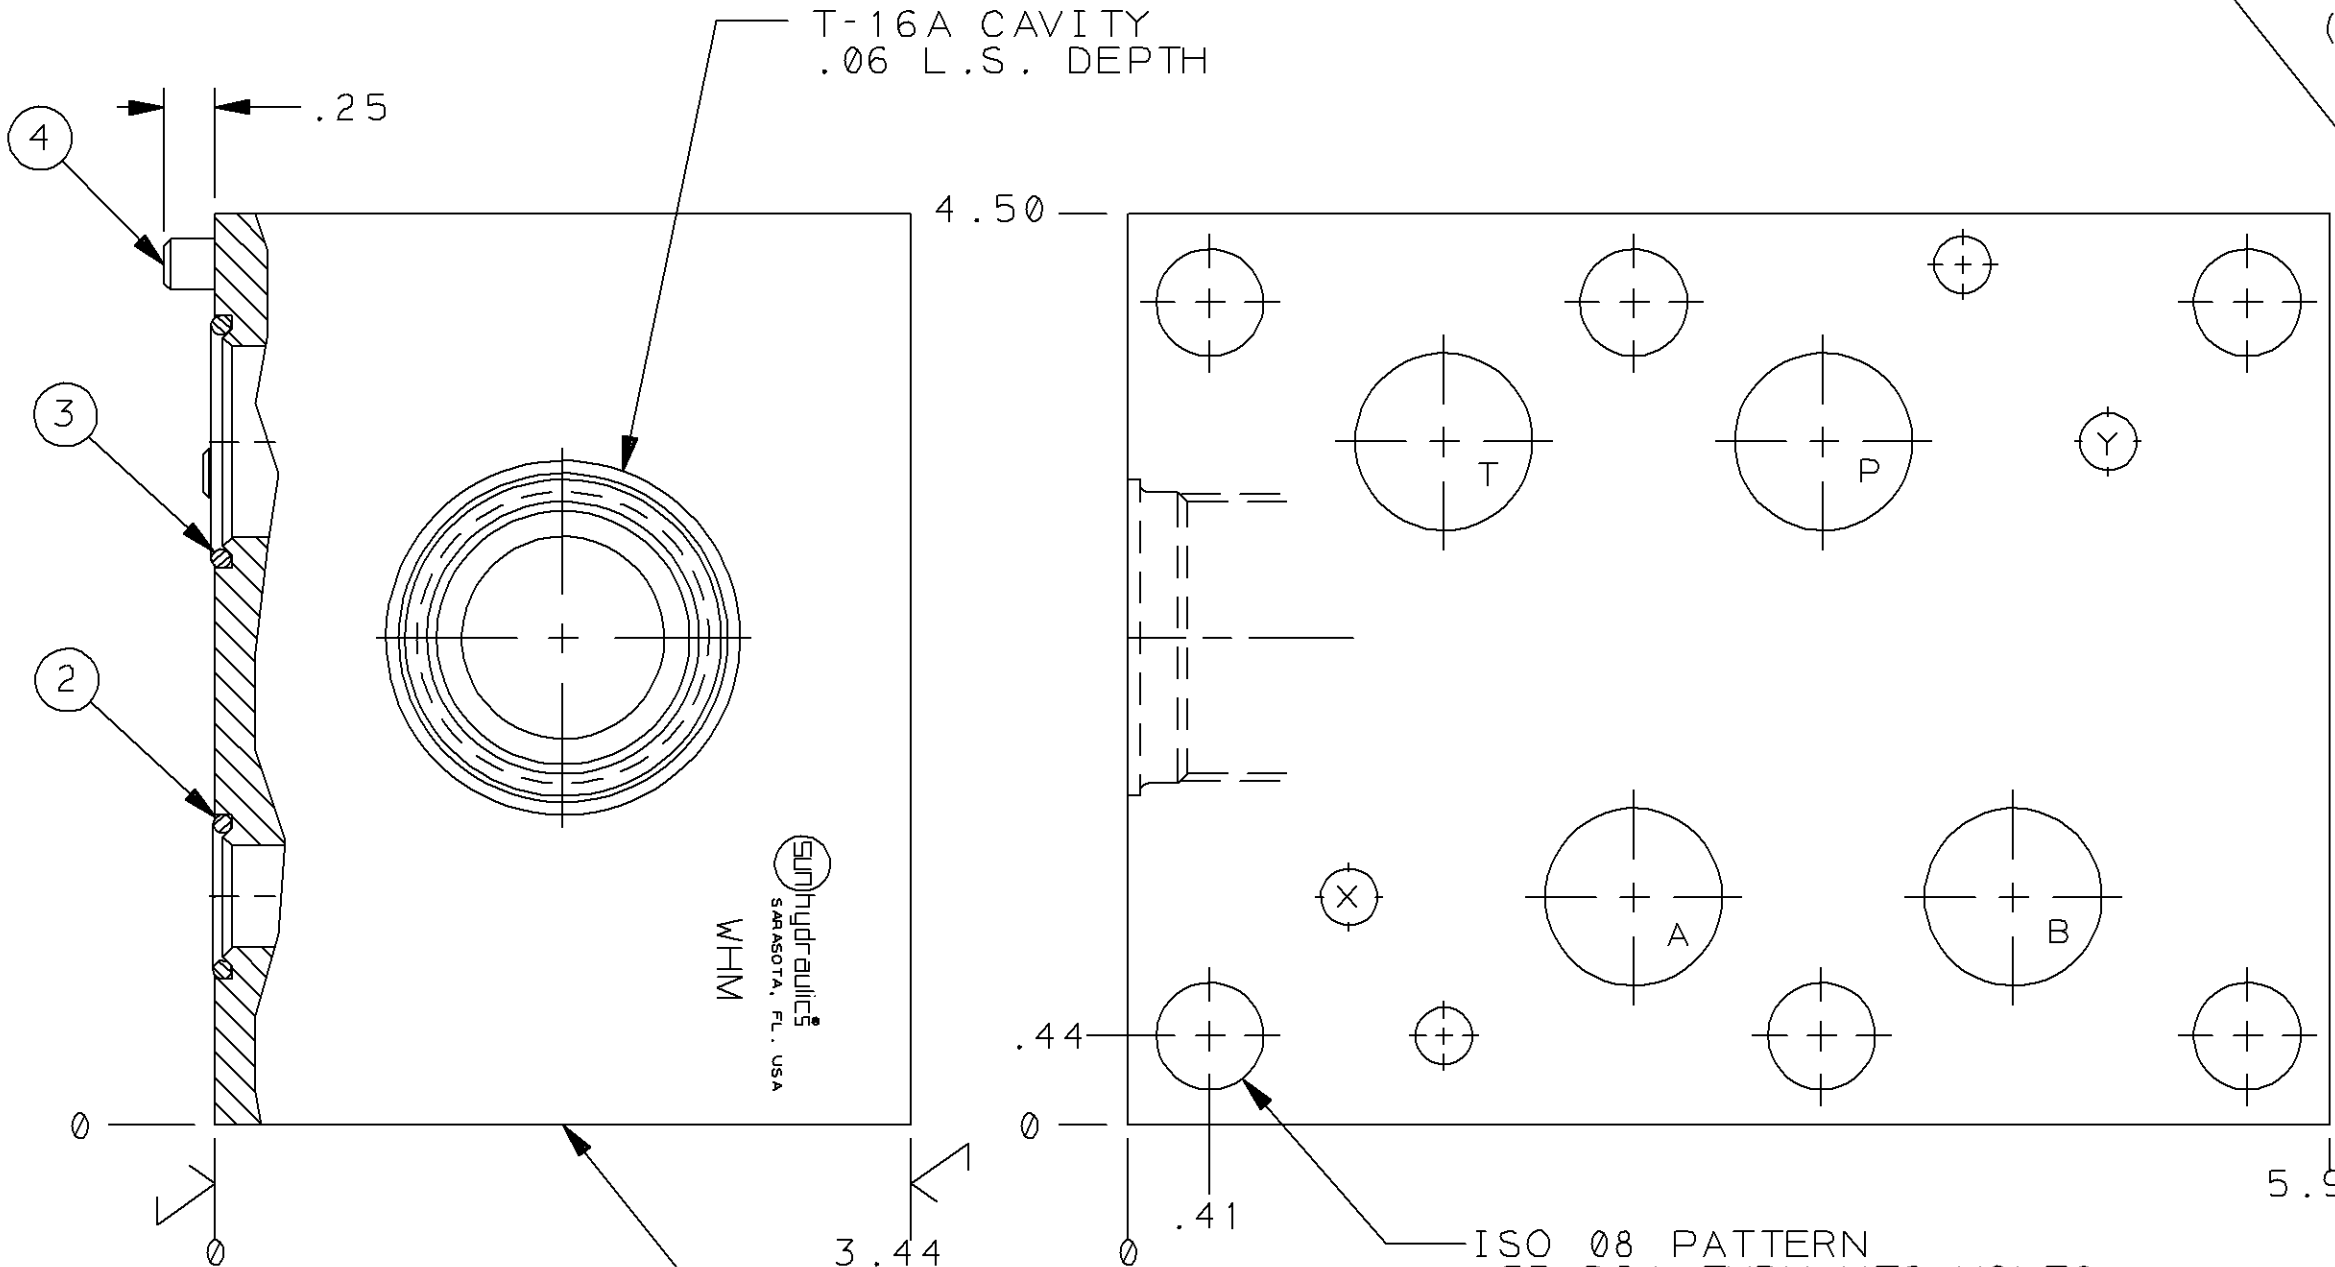

5	A330 006 004	SAE-4 O RING BOSS PLUG	1
4	811 001 002	PIN	1
3	500 001 121	O RING	4
2	500 001 114	O RING	2
1	152-390-002	BODY	1
ITEM	PART NO.	PART NAME	QTY

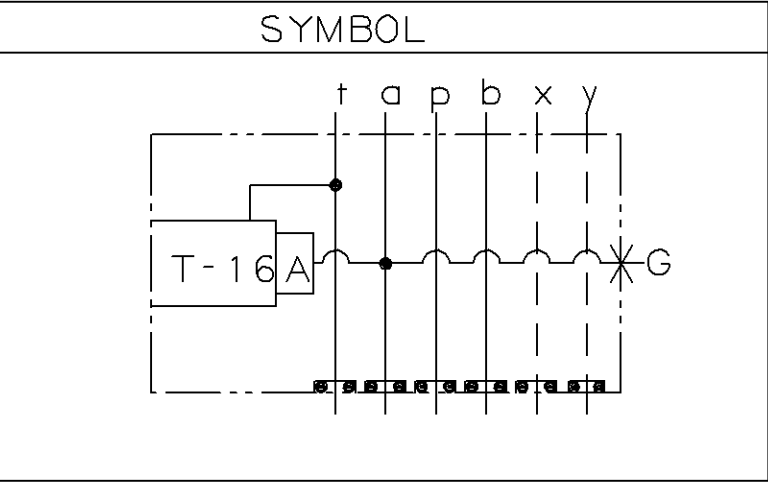

UNLESS
OTHERWISE
SPECIFIED

DIMENSION TOL
.x = ±.030
.xx = ±.015
.xxx = ±.005
ANGLE TOL ± 1/4
FINISH 80✓
REMOVE ALL
BURRS

COMBINED ITEM'S #5 & 6
REVISION
DATE
DRN
CHK
REL

OUTLINE & ASSEM.

TITLE
ISO 08 SANDWICH
BODY T-16A A to T

SCALE
1 = 1

REF.
P to T =WHL
B to T =WHN

DRAWN
R/B

CHECK
DAS

RELEASE
3102

DATE
5-24-91

DATE
5-27-91

DATE
5-24-91

MATERIAL
ALUMINUM AND NOTED

HEAT TREAT & FINISH

REVISION
A

PART NO.
WHM

CORPORATION
701 TALLEVAST ROAD
SARASOTA, FLORIDA 34243, USA
TELEPHONE (941) 362-1300