
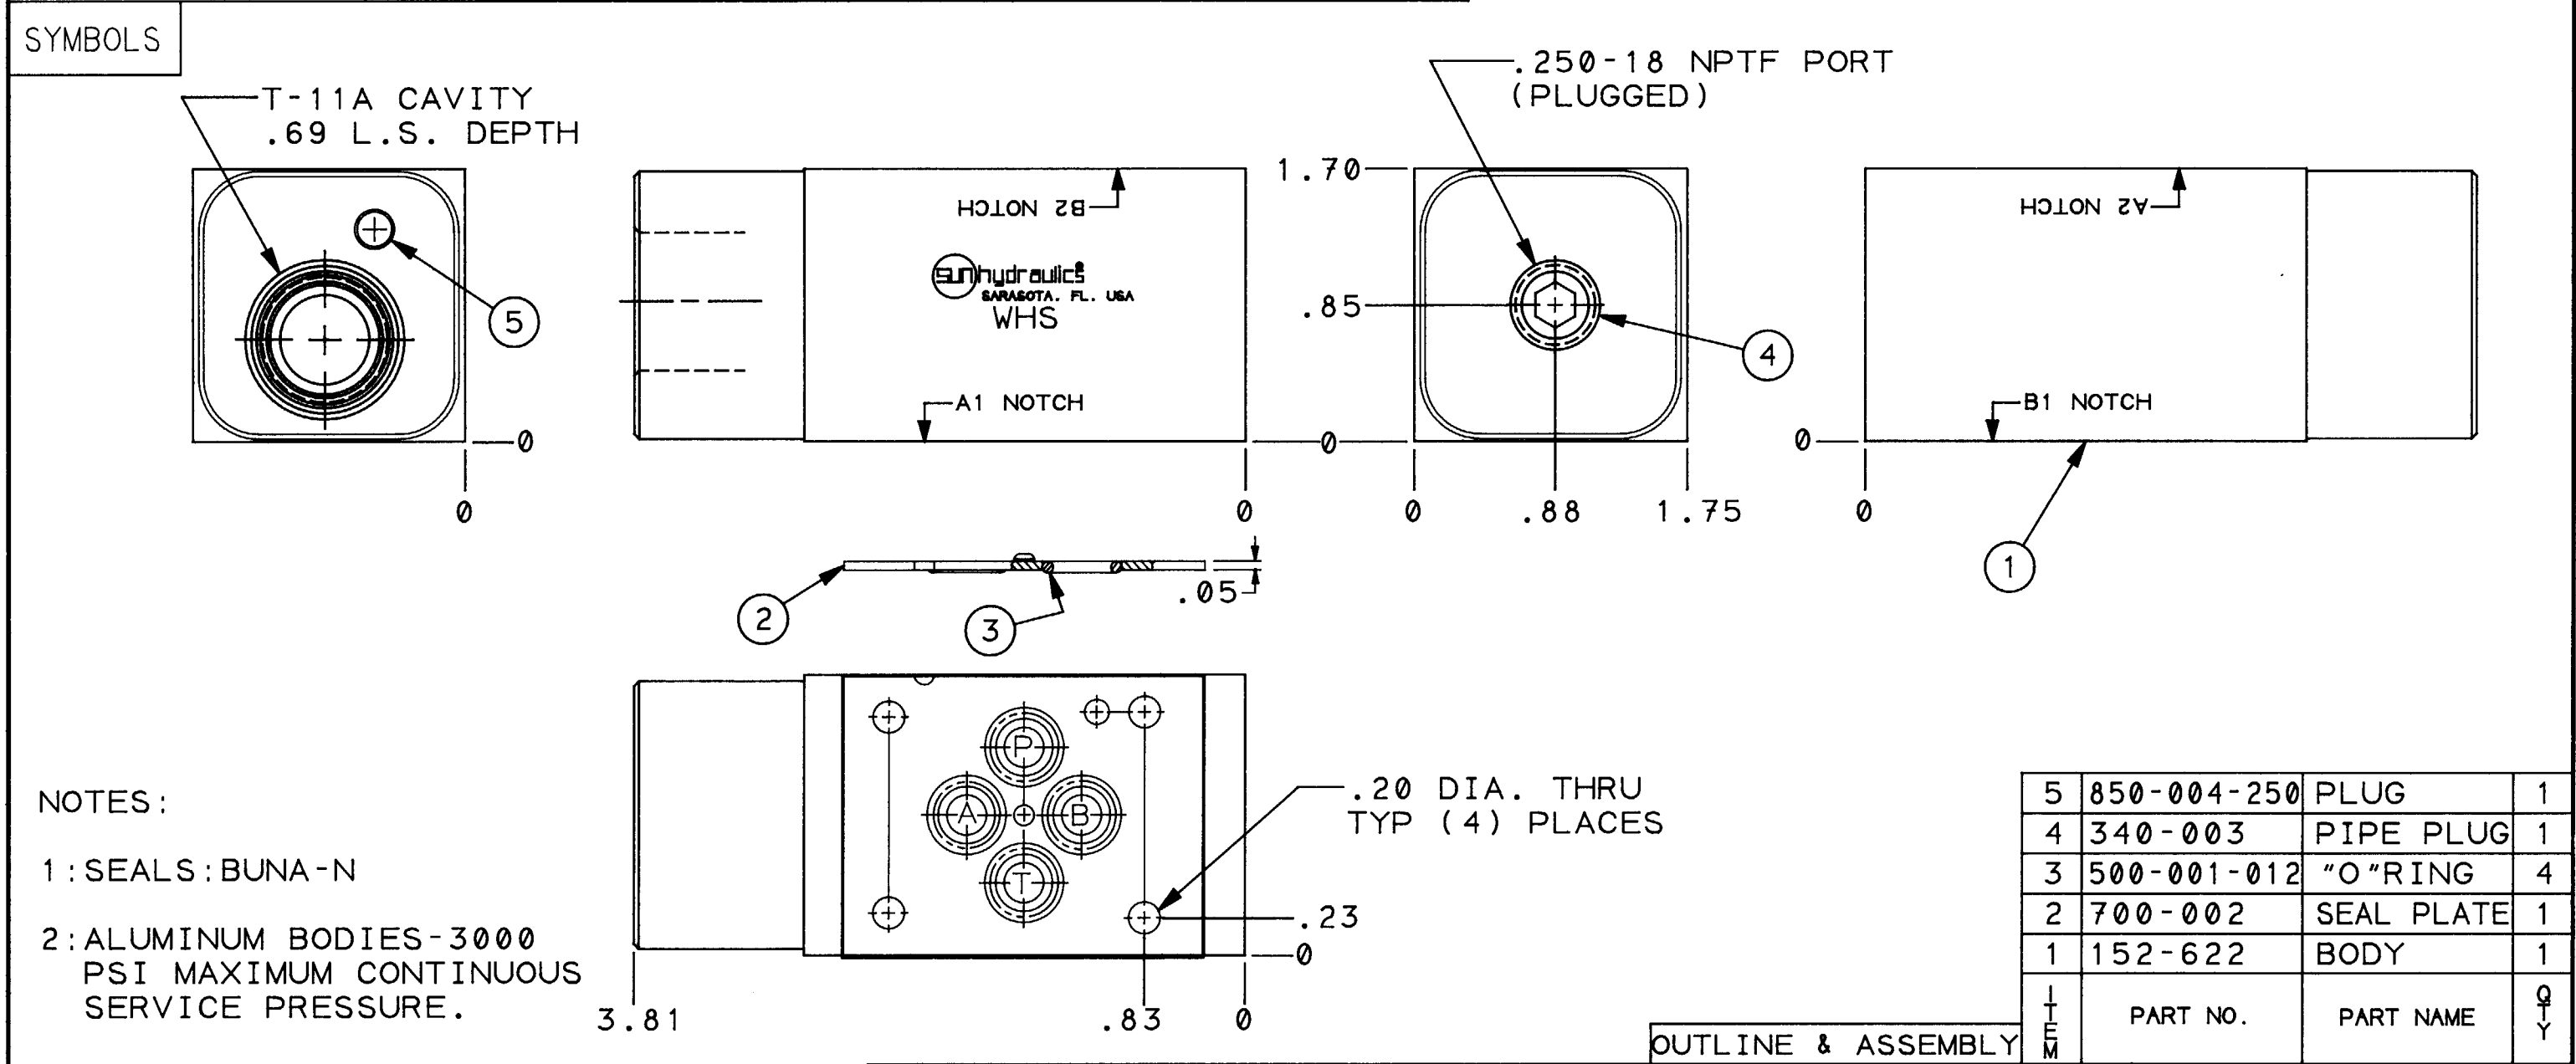


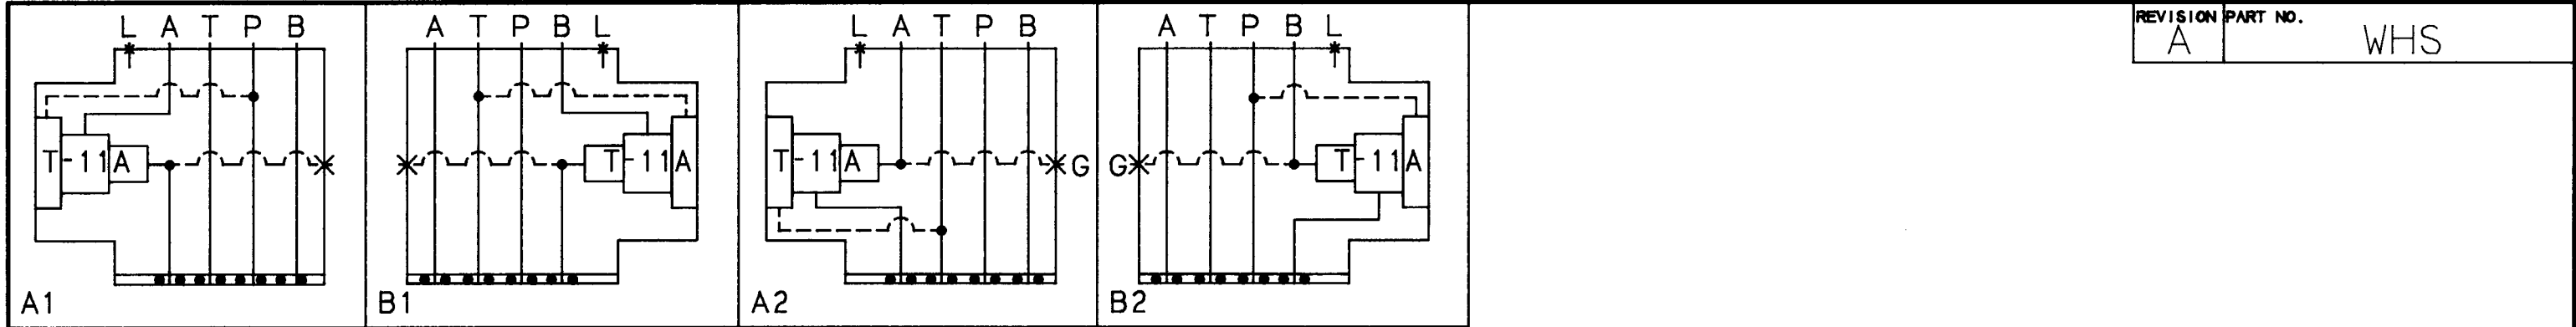

- NOTES:
- 1: SEALS: BUNA-N
 - 2: ALUMINUM BODIES-3000 PSI MAXIMUM CONTINUOUS SERVICE PRESSURE.
 - 3: FOR OTHER OPTIONS SEE OPTION SHEET.
 - 4: SEAL PLATE MOUNTS ON SIDE OPPOSITE SOLENOID VALVE.

5	850-004-250	PLUG	1
4	340-003	PIPE PLUG	1
3	500-001-012	"O"RING	4
2	700-002	SEAL PLATE	1
1	152-622	BODY	1
ITEM	PART NO.	PART NAME	QTY

- REVISED SYMBOL & TITLE.	9-30-91	BRS			
A REVISED STAMPING.	8-15-91	BRS	3233		
LET	REVISION	DATE	DRN	CHK	REL

UNLESS OTHERWISE SPECIFIED		TITLE BOSCH INTERFACE MTD SANDWICH T-11A CAVITY ON A OR B WITH DRAIN TO T OR P WITH L-PORT BLOCKED		REVISION A PART NO. WHS	
DIMENSION	TOL	SCALE	REF.	MATERIAL	SUN hydraulics CORPORATION 1500 UNIVERSITY PARKWAY SARASOTA, FLORIDA 34243, USA TELEPHONE (813) 355-2983
.x	±.030	1:1		ALUMINUM	
.xx	±.015				
.xxx	±.005				
ANGLE TOL ± 1/2°		DRAWN	CHECK	RELEASE	
FINISH 80✓		BRS	R/B	3086	
REMOVE ALL BURRS		DATE	DATE	DATE	
		5/20/91	5/20/91	5/20/91	