

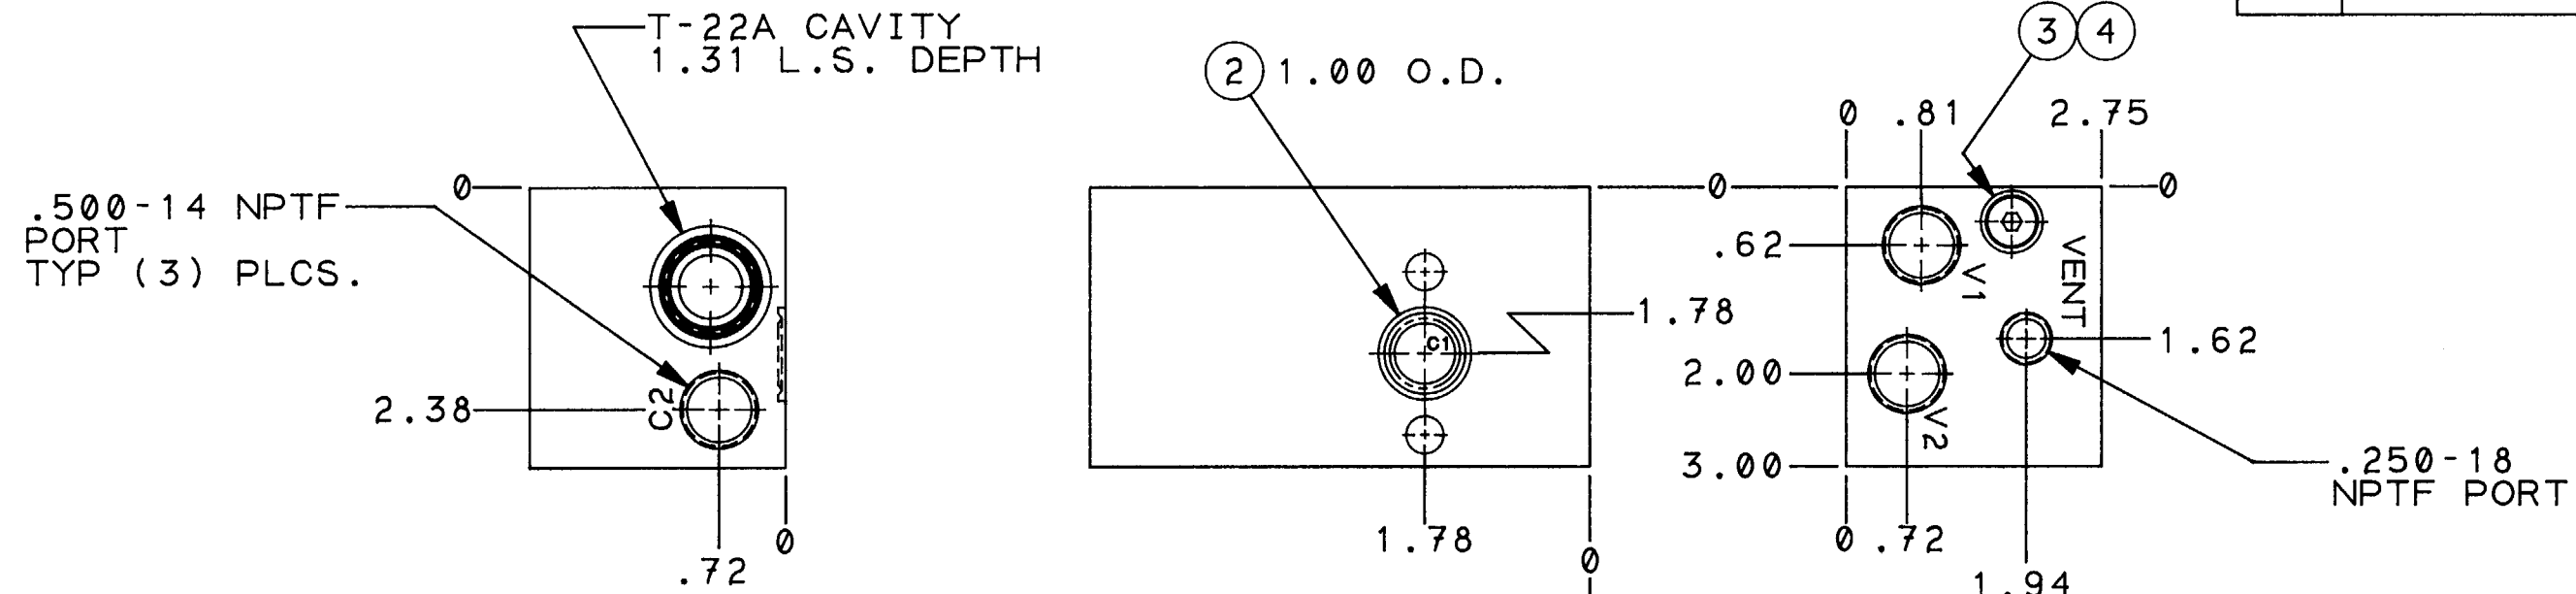


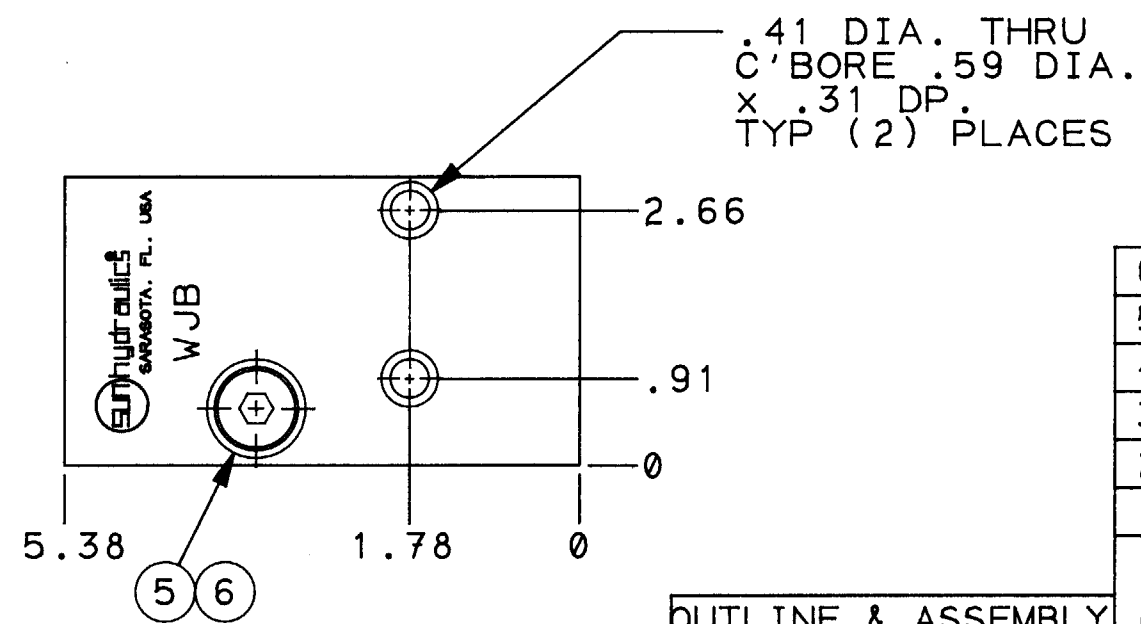

NOTES :

1)SEALS:BUNA-N

2)ALUMINUM BODIES-3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE.

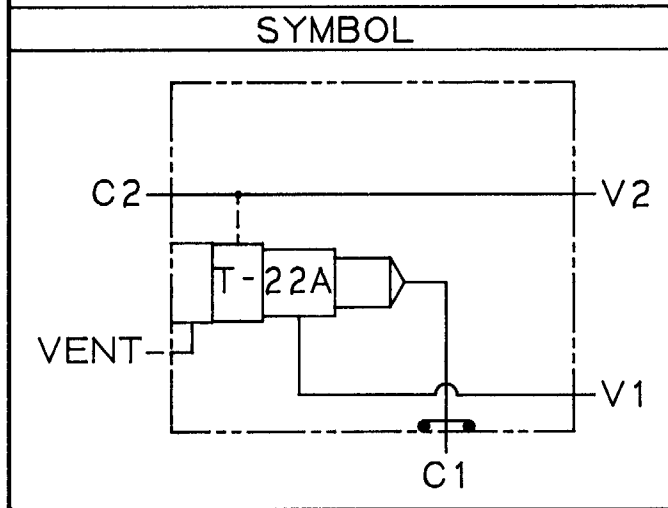

6	330-006-008	HEX SOCKET "O"RING BOSS PLUG	1
5	500-002-908	"O"RING	1
4	330-006-004	HEX SOCKET "O"RING BOSS PLUG	1
3	500-002-904	"O"RING	1
2	500-001-117	"O"RING	1
1	152-578-001	BODY	1
ITEM	PART NO.	PART NAME	QTY

OUTLINE & ASSEMBLY

UNLESS OTHERWISE SPECIFIED

DIMENSION TOL
.x = ±.030
.xx = ±.015
.xxx = ±.005
ANGLE TOL ±½
FINISH 80✓
REMOVE ALL
BURRS

SCALE
1/2

REF.

DRAWN
DAS

CHECK

RELEASE
2932

DATE
1-30-91

DATE

DATE
2-8-91

MATERIAL
ALUMINUM

HEAT TREAT & FINISH

TITLE
DIRECT MTD. T-22A
CAVITY, EXTERNAL VENT-
1/2 NPTF

REVISION

PART NO.

WJB

LET

REVISION

DATE

DRN

CHK

REL

SUN hydraulics[®]
CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (813) 355-2983