


4-ØFF MTG HOLES .422
(10,7) DIA THRO C/BORED
.688 (17,5) DIA x .35
(9) DEEP.

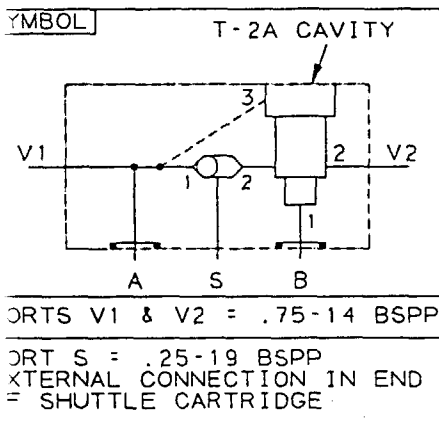


NOTES

ALUMINIUM BODIES MAX CONTINUOUS
SERVICE PRESSURE 3000 PSI.(210 BAR)
THIS BODY WILL INTERFACE ONLY WITH
.750 BSPP & .750 NPTF PORTS ON THE
DANFOSS OMT MOTOR RANGE.
SEALS MATERIAL : BUNA-N.
FOR OTHER OPTIONS,SEE OPTIONS CHART
DIM'S IN BRACKETS THUS: (), ARE IN mm

DRAWING NOTATION:

3RD ANGLE PROJECTION

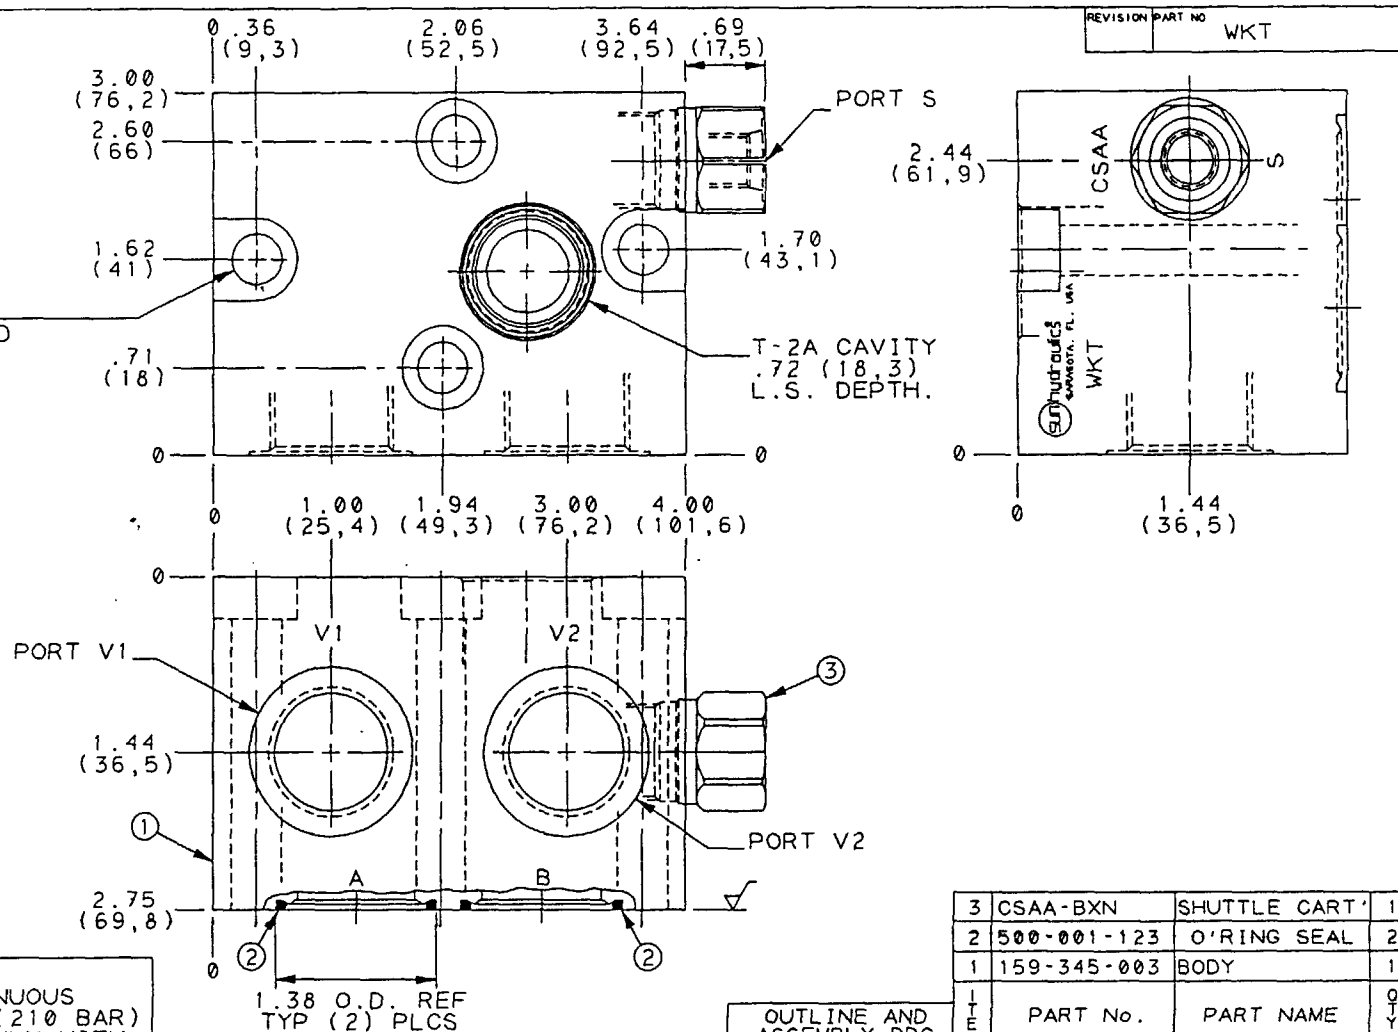

3	CSAA-BXN	SHUTTLE CART	1
2	500-001-123	O'RING SEAL	2
1	159-345-003	BODY	1

ITEM	PART No.	PART NAME	QTY
------	----------	-----------	-----

OUTLINE AND
ASSEMBLY DRG

TITLE BODY... SINGLE T-2A CAVITY
ON B.WITH BRAKE SHUTTLE
DIRECT MTD DANFOSS OMT MOTOR

UNLESS
OTHERWISE
SPECIFIED

DIMENSION TOL

.X ±.030
.XX ±.015
.XXX ±.005

ANGLE TOL ±°

FINISH 80V

REMOVE ALL
BURRS

SCALE REF.
1:2 CATALOGUE DESIGN

DRAWN
G. Madan

CHECK
MS

RELEASE
3547

DATE
06 DEC 90

DATE
06 OCT 91

DATE
2-26-92

MATERIAL
ALUMINIUM / S.G.I.

HEAT TREAT & FINISH

REVISION PART NO.
WKT

SUN hydraulics[®]
CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (813) 355-2802