
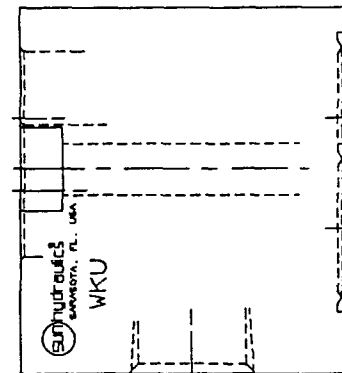
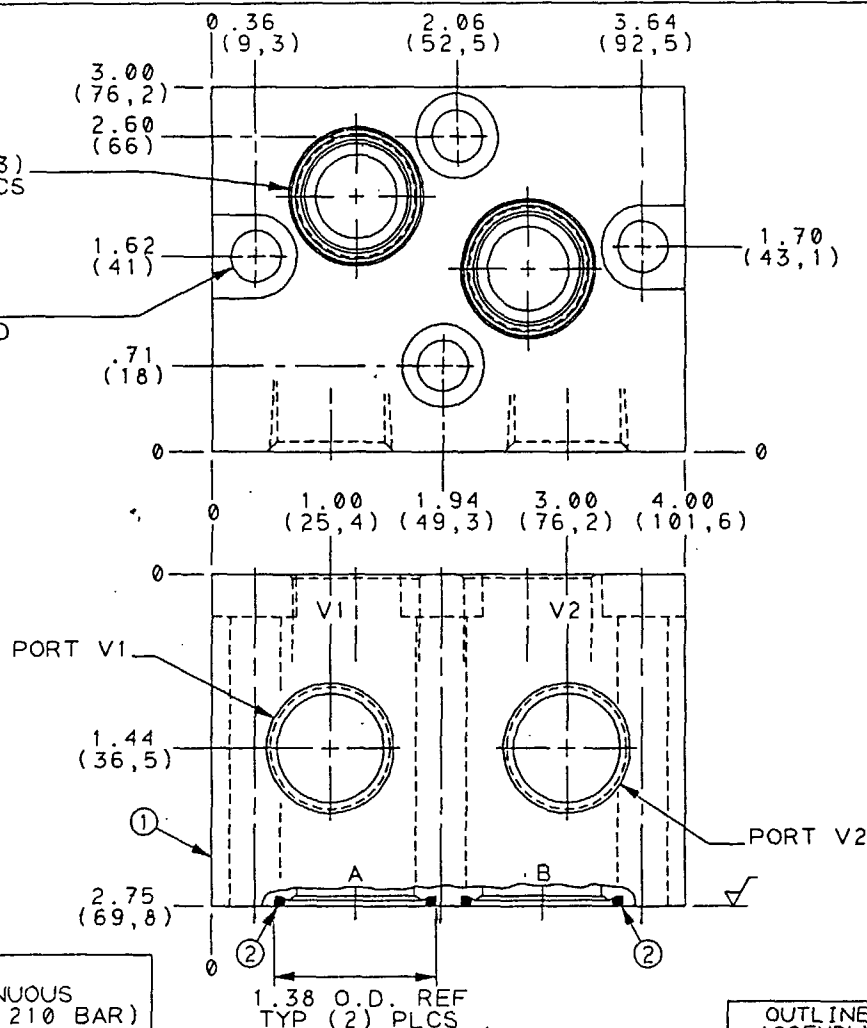


T-2A CAVITIES .72 (18,3)
L.S. DEPTH. TYP (2) PLCS

4-ØFF MTG HOLES .422
(10,7) DIA THRO C/BORED
.688 (17,5) DIA x .35
(9) DEEP.

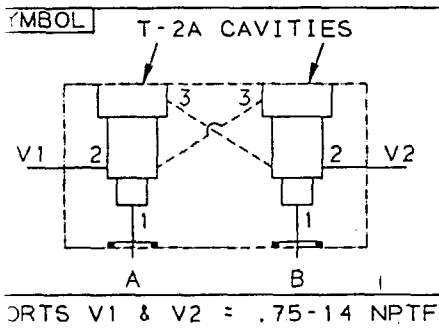

NOTES
 ALUMINIUM BODIES MAX CONTINUOUS
 SERVICE PRESSURE 3000 PSI.(210 BAR)
 THIS BODY WILL INTERFACE ONLY WITH
 DANFOSS OMT MOTOR RANGE.
 SEALS MATERIAL : BUNA-N.
 FOR OTHER OPTIONS,SEE OPTIONS CHART
 DIM'S IN BRACKETS THUS: () ,ARE IN mm
 DRAWING NOTATION: 3RD ANGLE PROJECTION

REV	REVISION	DATE	DRN	CHK	REL

UNLESS OTHERWISE SPECIFIED
DIMENSION TOL
.X = ±.030
.XX = ±.015
.XXX = ±.005
ANGLE TOL ±X
FINISH 80V
REMOVE ALL BURRS

OUTLINE AND ASSEMBLY DRG

SCALE REF.	1:2 CATALOGUE DESIGN
DRAWN	CHECK
G.Maddan	MS
DATE	DATE
06 DEC 90	08 OCT 91
2-26-92	

2	500-001-123	O-RING SEAL	2
1	159-348-001	BODY	1
ITEM	PART No.	PART NAME	QTY

WKS

SUN hydraulics CORPORATION
 1500 UNIVERSITY PARKWAY
 GAITHERSBURG, FLORIDA 34143, USA
 TELEPHONE (813) 355-2383