
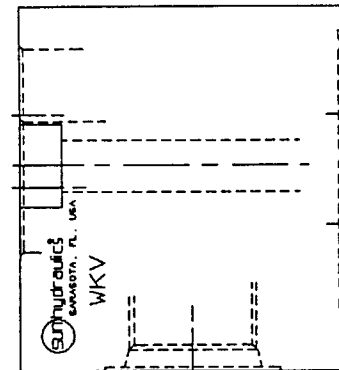
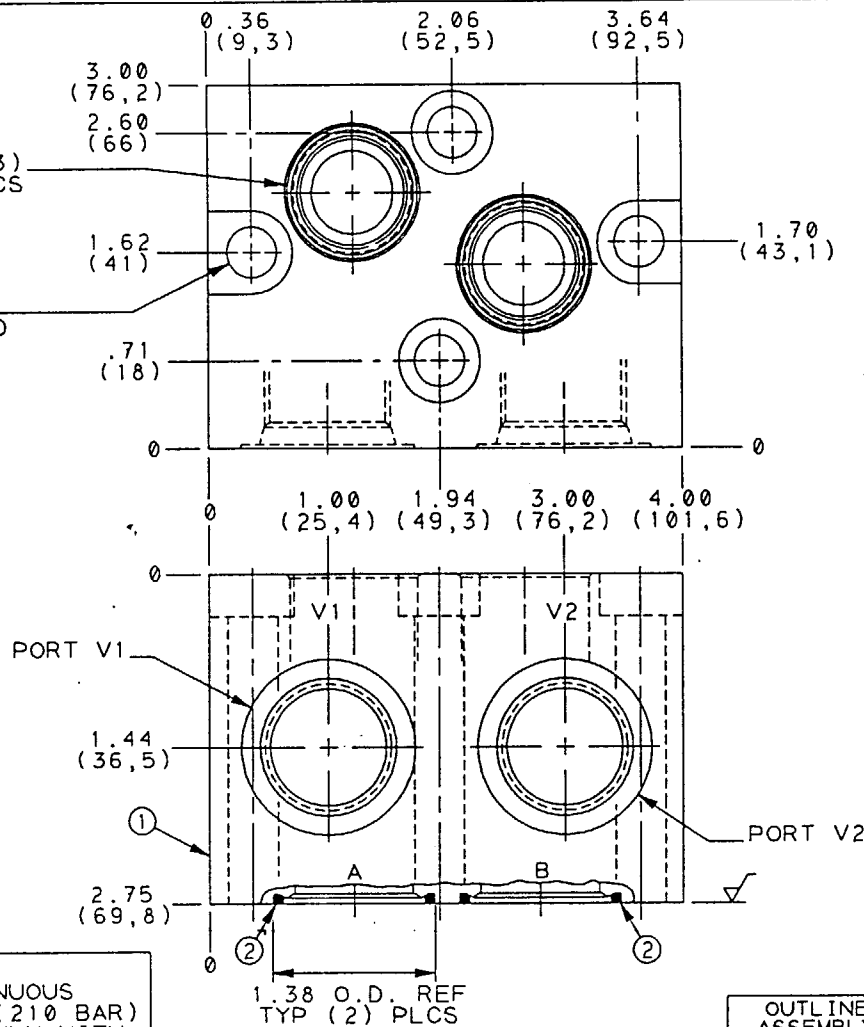


T-2A CAVITIES .72 (18,3)
L.S. DEPTH. TYP (2) PLCS

4-OFF MTG HOLES .422
(10,7) DIA THRO C/BORED
.688 (17,5) DIA X .35
(9) DEEP.

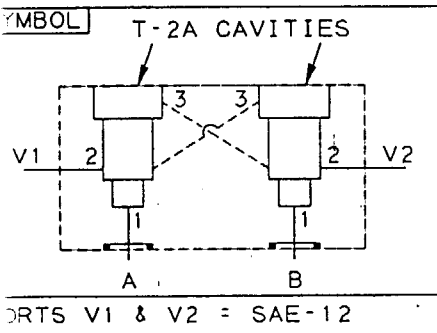

NOTES
ALUMINIUM BODIES MAX CONTINUOUS
SERVICE PRESSURE 3000 PSI. (210 BAR)
THIS BODY WILL INTERFACE ONLY WITH
.750 BSPP & .750 NPTF PORTS ON THE
DANFOSS OMT MOTOR RANGE.
SEALS MATERIAL : BUNA-N.
FOR OTHER OPTIONS, SEE OPTIONS CHART
DIM'S IN BRACKETS THUS: (), ARE IN MM
DRAWING NOTATION: 3RD ANGLE PROJECTION

LET	REVISION	DATE	DRN	CHK	REL

UNLESS
OTHERWISE
SPECIFIED
DIMENSION TOL
.X = ±.030
.XX = ±.015
.XXX = ±.005
ANGLE TOL ± 1/2°
FINISH 80-V
REMOVE ALL
BURRS

OUTLINE AND ASSEMBLY DRG				REVISION PART NO.	
TITLE BODY... DUAL T-2A CAVITIES ON A & B. (DIRECT MTD DANFOSS OMT MOTOR)				WKV	
SCALE REF.	1:2	CATALOGUE DESIGN	MATERIAL	ALUMINIUM / S.G.I.	
DRAWN	G. Madden	CHECK	RELEASE	HEAT TREAT & FINISH	
DATE	MS	DATE	3541		
DATE	2-26-72	DATE			

01-123	O-RING SEAL	2
48-002	BODY	1
T No.	PART NAME	QTY
REVISION	PART NO.	
	WKV	
 sun hydraulics® CORPORATION 1500 UNIVERSITY PARKWAY SARASOTA, FLORIDA 34243, USA TELEPHONE (813) 355-2383		