
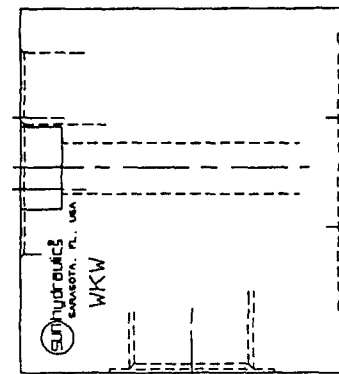
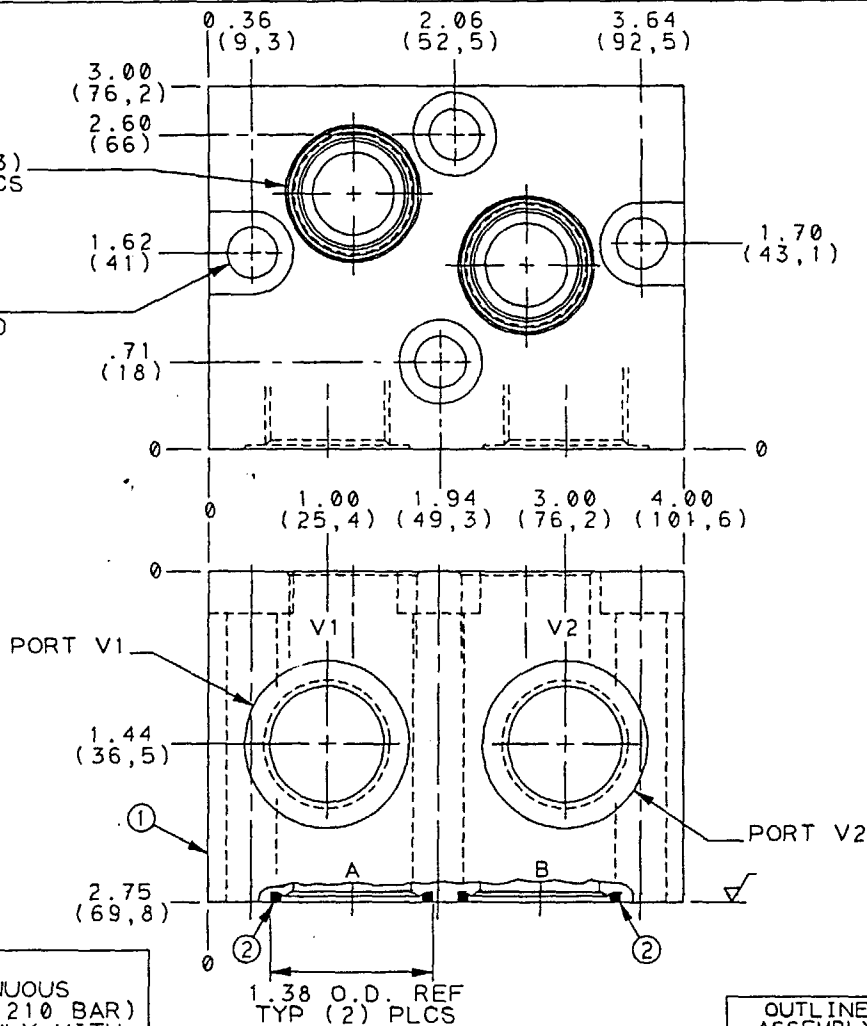


T-2A CAVITIES .72 (18,3)
L.S. DEPTH. TYP (2) PLCS

4-ØFF MTG HOLES .422
(10,7) DIA THRO C/BORED
.688 (17,5) DIA x .35
(9) DEEP.

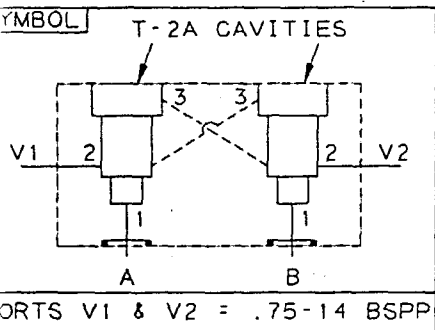

REVISION PART NO WKW

NOTES

- ALUMINIUM BODIES MAX CONTINUOUS SERVICE PRESSURE 3000 PSI. (210 BAR)
- THIS BODY WILL INTERFACE ONLY WITH .750 BSPP & .750 NPTF PORTS ON THE DANFOSS OMT MOTOR RANGE.
- SEALS MATERIAL : BUNA-N.
- FOR OTHER OPTIONS, SEE OPTIONS CHART
- DIM'S IN BRACKETS THUS: (), ARE IN mm
- DRAWING NOTATION: 3RD ANGLE PROJECTION

LET	REVISION	DATE	DRN	CHK	REL

UNLESS OTHERWISE SPECIFIED
DIMENSION TOL
.X ±.030
.XX ±.015
.XXX ±.005
ANGLE TOL ±X
FINISH 80V
REMOVE ALL BURRS

OUTLINE AND ASSEMBLY DRG			
TITLE BODY... DUAL T-2A CAVITIES ON A & B. (DIRECT MTD DANFOSS OMT MOTOR)	SCALE REF. 1:2 CATALOGUE DESIGN	MATERIAL ALUMINIUM / S.G.I.	HEAT TREAT & FINISH
DRAWN G. Madder	CHECK MS	RELEASE 3541	DATE 2-26-92
DATE 04 DEC 90	DATE 04 OCT 91	DATE 04 OCT 91	DATE 04 OCT 91

2	500-001-123	O-RING SEAL	2
1	159-348-003	BODY	1
ITEM	PART No.	PART NAME	QTY

REVISION PART NO. WKW
SUN hydraulics CORPORATION 1500 UNIVERSITY PARKWAY SARASOTA, FLORIDA 34243, USA TELEPHONE (813) 355-2583