



T-2A CAVITIES .72 (18,3)
L.S. DEPTH. TYP (2) PLCS

4-ØFF MTG HOLES .422
(10,7) DIA THRO C/BORED
.688 (17,5) DIA x .35
(9) DEEP.

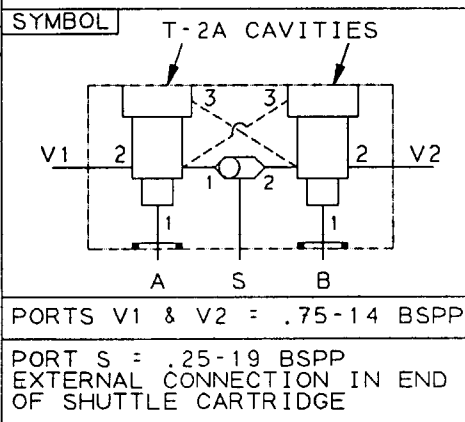

- NOTES**
- 1) ALUMINIUM BODIES MAX CONTINUOUS SERVICE PRESSURE 3000 PSI. (210 BAR)
 - 2) THIS BODY WILL INTERFACE ONLY WITH .750 BSPP & .750 NPTF PORTS ON THE DANFOSS OMT MOTOR RANGE.
 - 3) SEALS MATERIAL : BUNA-N.
 - 4) FOR OTHER OPTIONS, SEE OPTIONS CHART
 - 5) DIM'S IN BRACKETS THUS: (), ARE IN mm
 - 6) DRAWING NOTATION: 3RD ANGLE PROJECTION

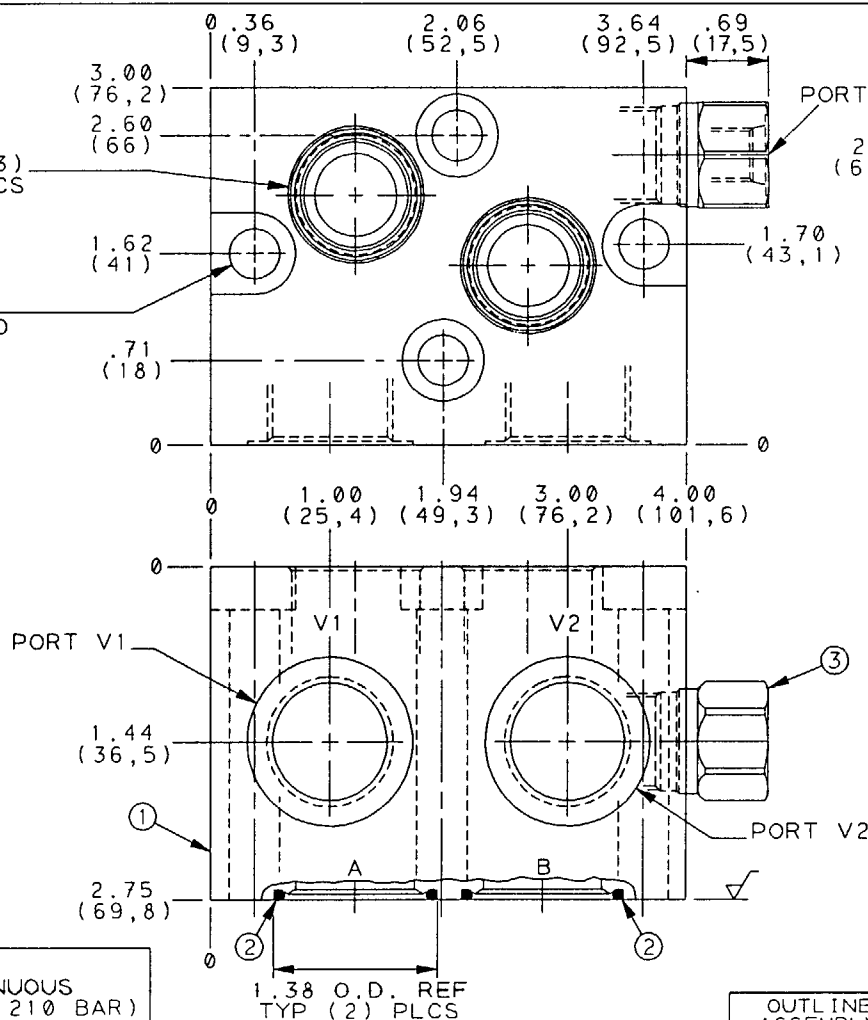

3	CSAA-BXN	SHUTTLE CART	1
2	500-001-123	O'RING SEAL	2
1	159-343-003	BODY	1
PART No.		PART NAME	QTY

OUTLINE AND ASSEMBLY DRG

TITLE BODY... DUAL T-2A CAVITIES
WITH BRAKE SHUTTLE
(DIRECT MTD DANFOSS OMT MOTOR)

SCALE REF.	1:2	CATALOGUE DESIGN
DRAWN	CHECK	RELEASE
DATE	DATE	DATE
27 NOV 90	04 OCT 91	

REVISION PART NO.
WKZ

MATERIAL
ALUMINIUM / S.G.I.
HEAT TREAT & FINISH

SUN hydraulics
CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (813) 355-2303