
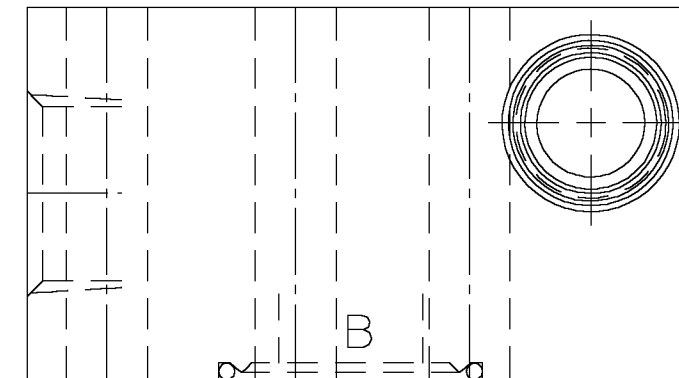


.750-14 NPTF


PART NO.

WLU

- 1) SEALS MATERIAL: BUNA-N
- 2) ALUMINIUM BODIES: 3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE
- 3) THIS BODY IS DESIGNED TO ACCOMMODATE
DANFOSS OMT- PORTS .750-14 NPTF &
.750-14BSPP.
IE, MAX PORT DIA 1.070"/(27.2mm)
- 4) TORQUE CARTRIDGE TO
ENGINEERING SPECIFICATIONS

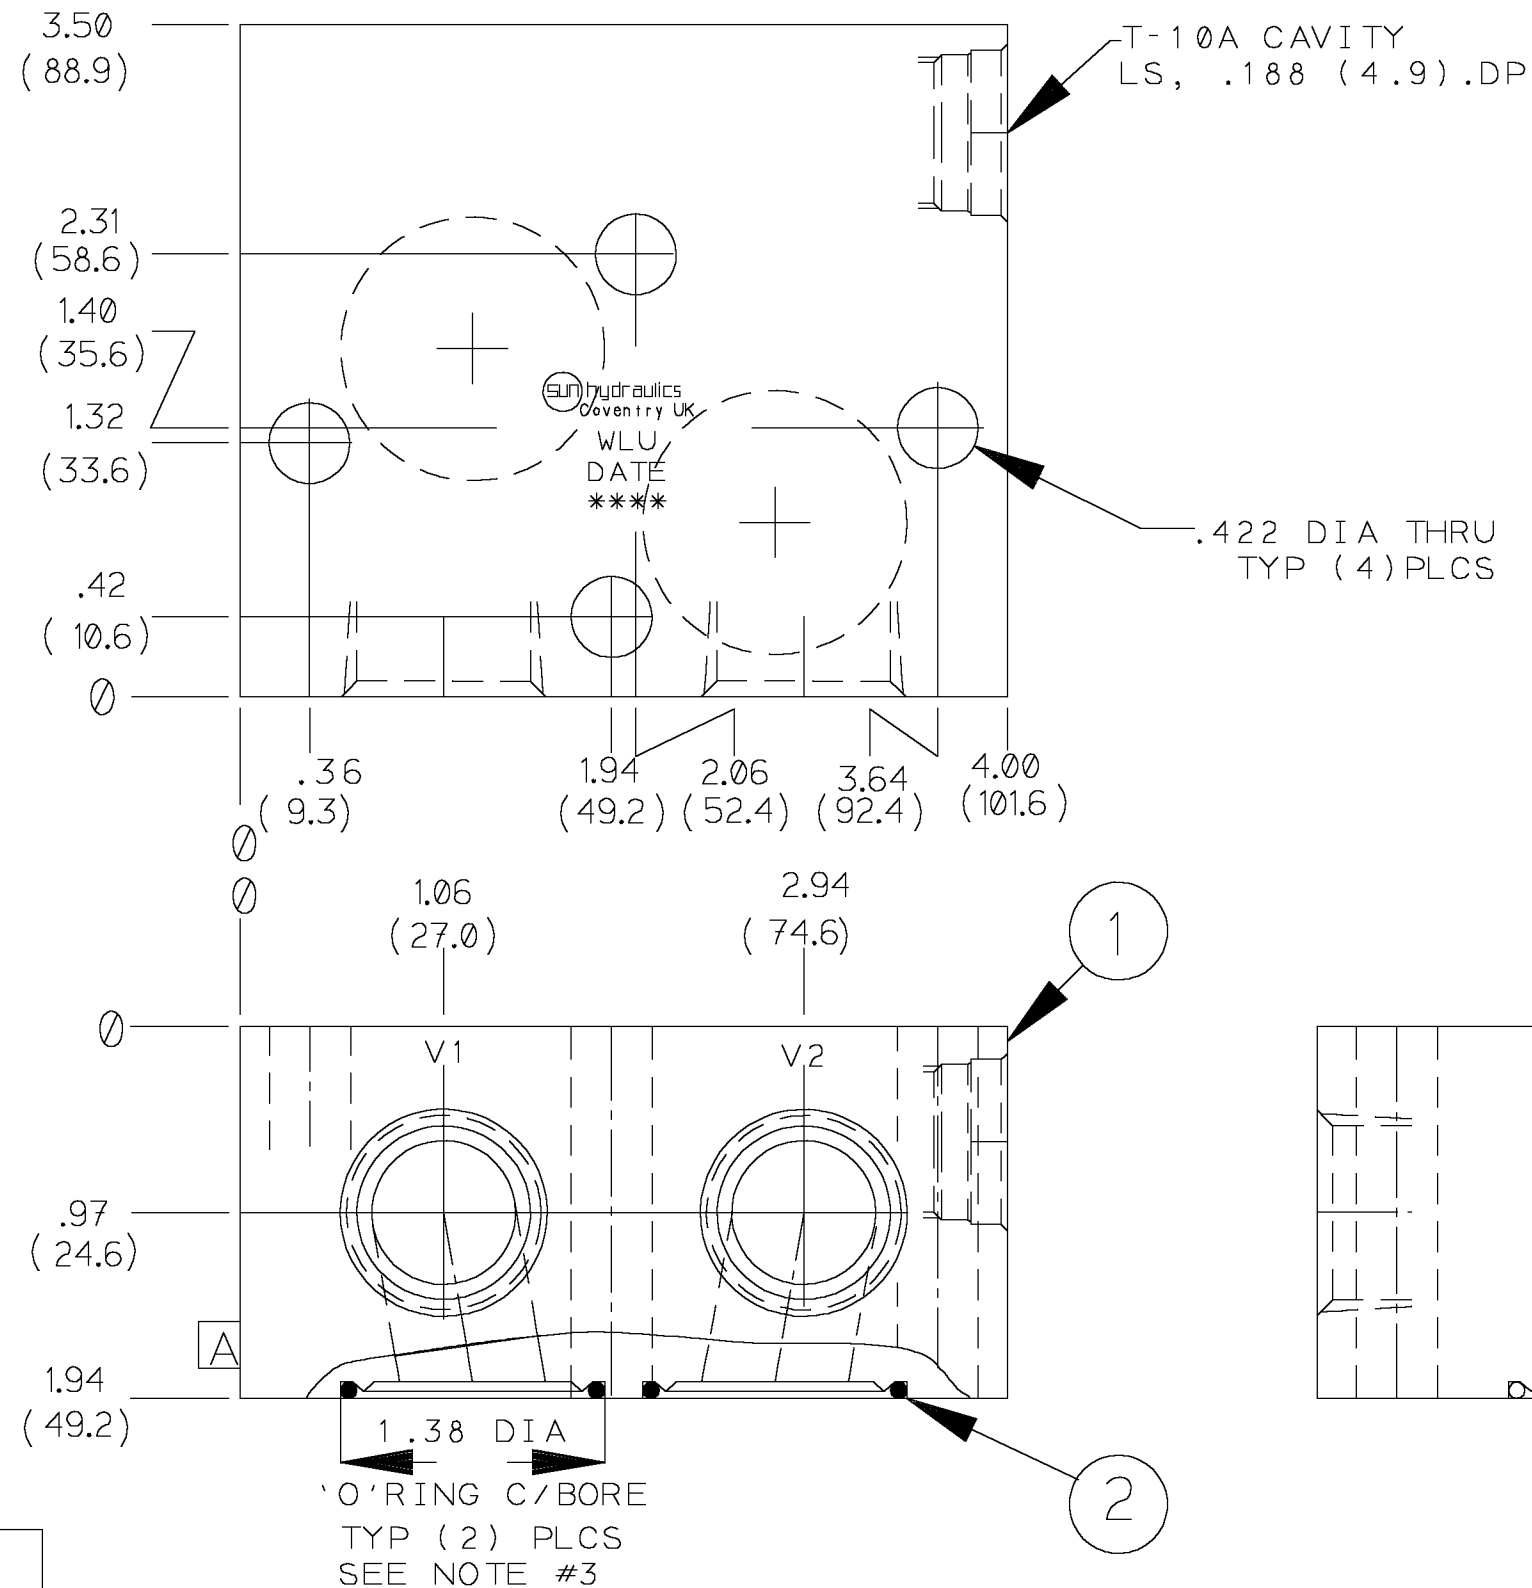

2	500 001 123	'O' RING	2
1	159 327 001	BODY	1
ITEM	PART NO.	PART NAME	QTY

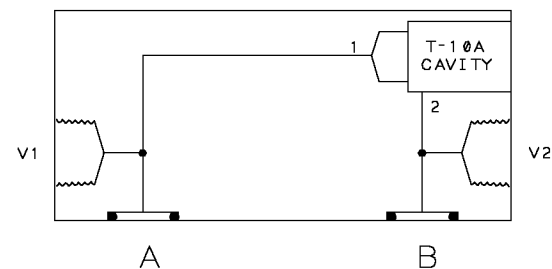

SYMBOL

						TITLE	DIRECT MOUNTED BODY DANFOSS SERIES OMT MOTORS T-10A CAVITY CROSS PORT 'A' TO 'B'	REVISION	PART NO.	WLU
						UNLESS OTHERWISE SPECIFIED				
						DIMENSION TOL	CADD SCALE REF.	MATERIAL		
						.x = ± .030	1:1 CATALOGUE	ALUMINIUM		
						.xx = ± .015				
						.xxx = ± .005				
						ANGLE TOL ± ½				
						FINISH 80 ✓				
						REMOVE ALL BURRS				
LET		REVISION		DATE	DRN CHK REL	DRAWN <i>CCMacNeill</i>	CHECK HG	RELEASE	HEAT TREAT & FINISH	Sun hydraulics [®] LIMITED WHILER ROAD, WHITLEY, COVENTRY, CV3 4LA ENGLAND TELEPHONE (0203) 367696
						DATE 17 JUL 94	DATE 27-Mar-95			