
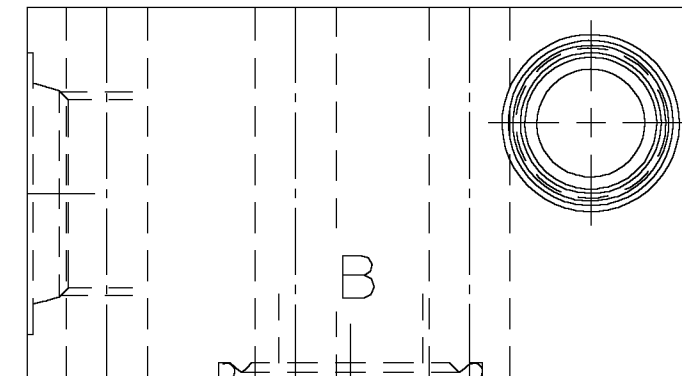
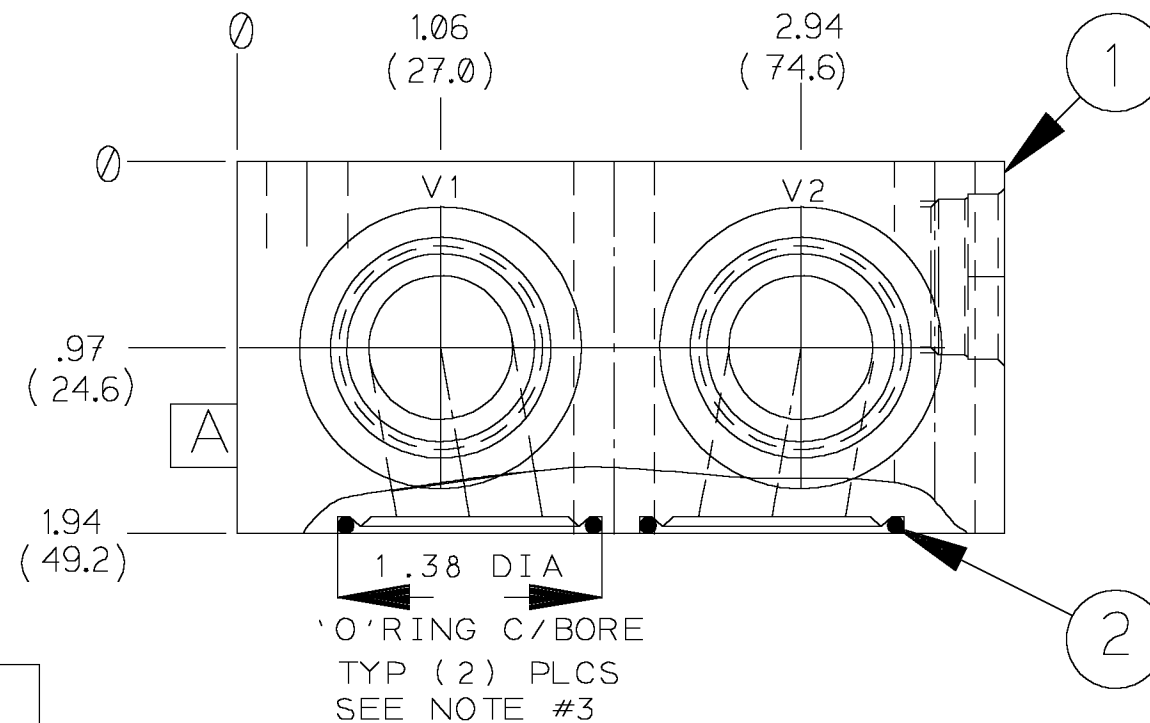



SAE - 12

WLV

- 1) SEALS MATERIAL: BUNA-N
- 2) ALUMINIUM BODIES: 3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE
- 3) THIS BODY IS DESIGNED TO ACCOMMODATE
DANFOSS OMT- PORTS .750-14 NPTF &
.750-14BSPP.
IE, MAX PORT DIA 1.070"/(27.2mm)
- 4) TORQUE CARTRIDGE TO
ENGINEERING SPECIFICATIONS

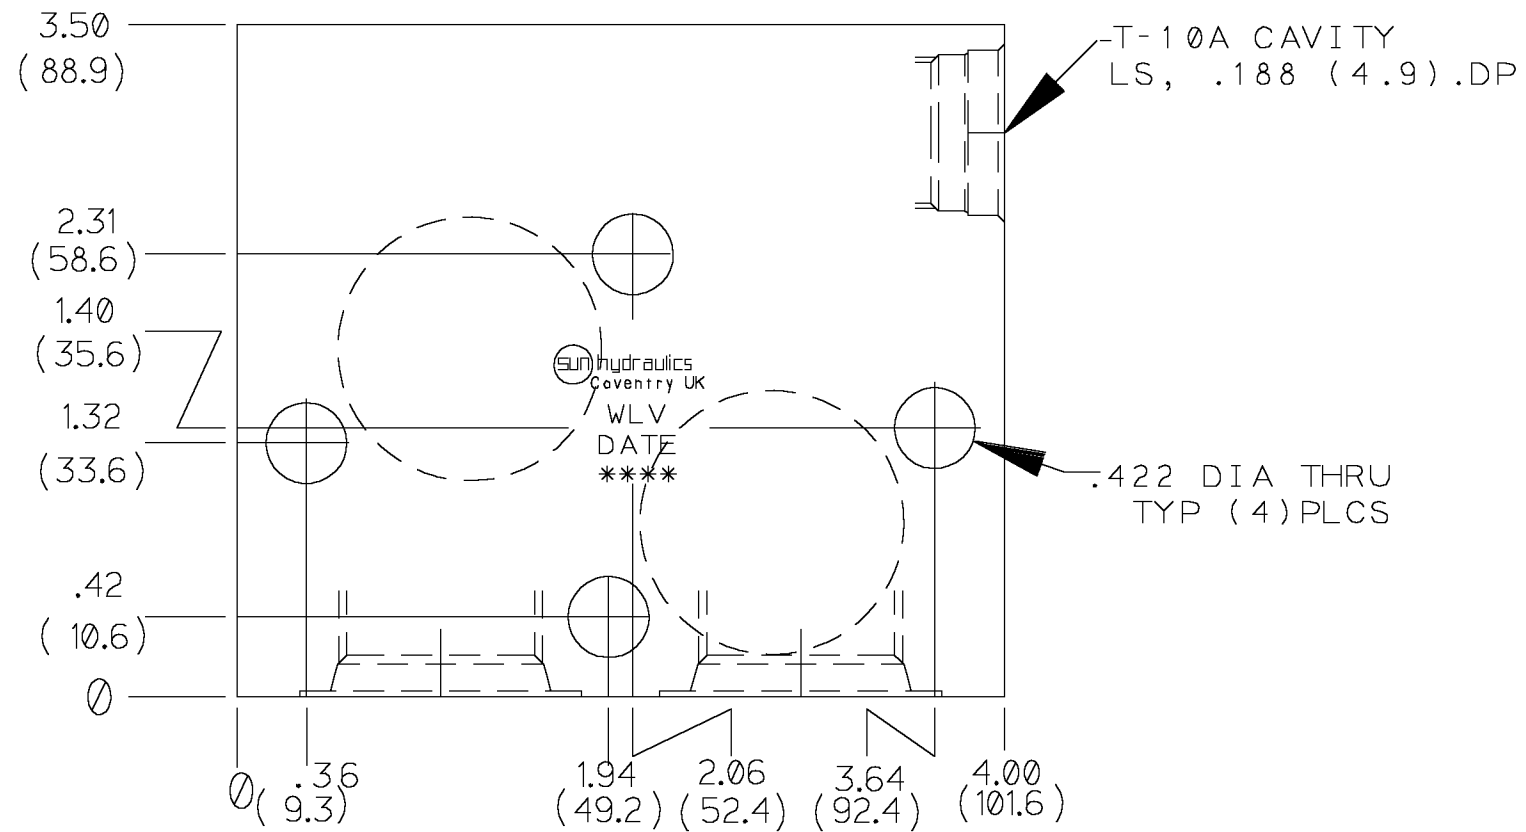

2	500 001 123	'O' RING	2
1	169 327 002	BODY	1
I T E M	PART NO.	PART NAME	Q T Y

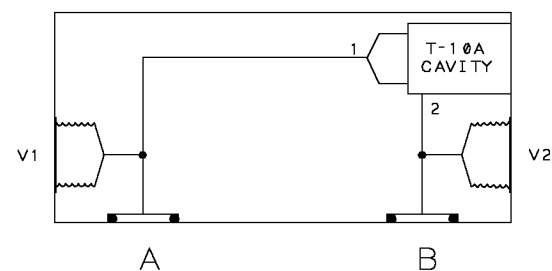

SYMBOL

							TITLE	DIRECT MOUNTED BODY DANFOSS SERIES OMT MOTORS T-10A CAVITY CROSS PORT 'A' TO 'B'	REVISION	PART NO.	WL V
							CADD SCALE	REF.	MATERIAL		
							1:1	CATALOGUE	ALUMINIUM		
							DRAWN	CHECK	RELEASE		
							CCMacNeill	HG			
							DATE	DATE	DATE		
							17 JUL 94	27-Mar-95			
LET	REVISION	DATE	DRN	CHK	REL		SUN hydraulics[®] LIMITED WHEELER ROAD, WHITLEY, COVENTRY, CV3 4LA ENGLAND TELEPHONE (0203) 307696				