PORTS MARKED V1 & V2

.750-14 NPTF

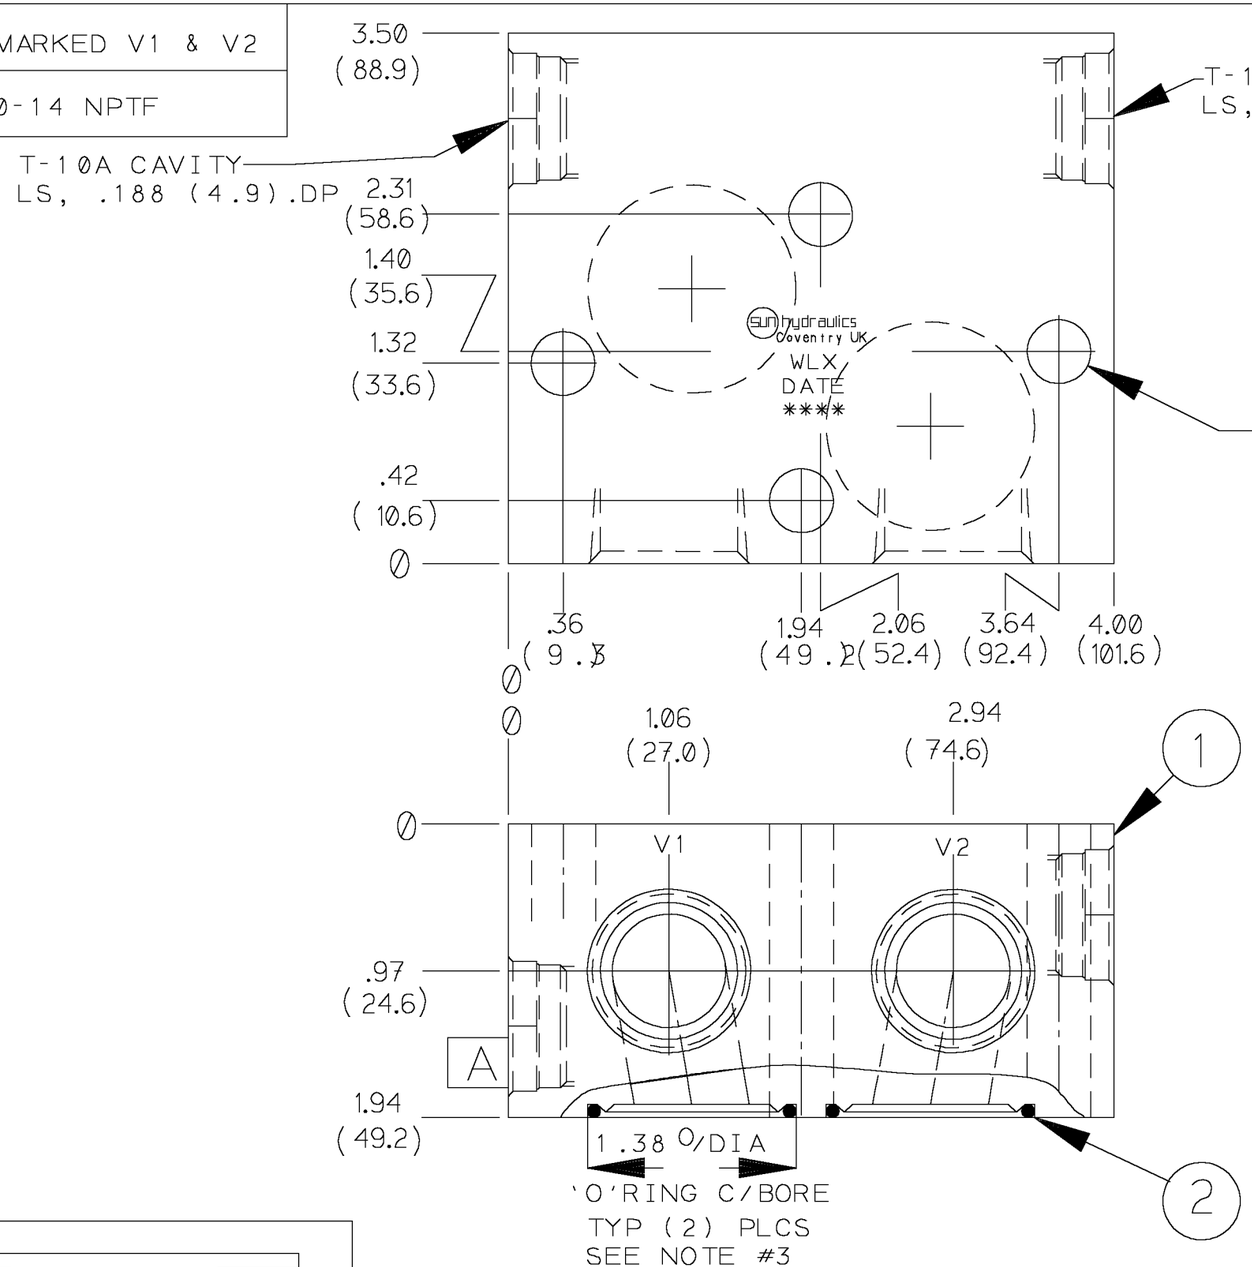

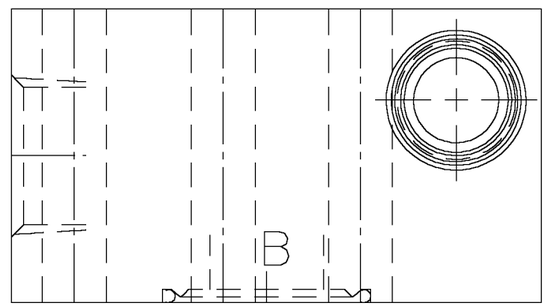

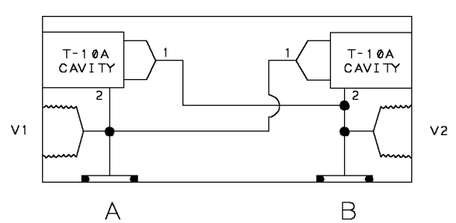

SYMBOL

3RD ANGLE PROJECTION

REVISION	PART NO.
	WLX

1) SEALS MATERIAL: BUNA-N

2) ALUMINIUM BODIES: 3000 PSI MAXIMUM CONTINUOUS SERVICE PRESSURE

3) THIS BODY IS DESIGNED TO ACCOMMODATE DANFOSS OMT- PORTS .750-14 NPTF & .750-14BSPP.
IE, MAX PORT DIA 1.070"/(27.2mm)

4) TORQUE CARTRIDGES TO ENGINEERING SPECIFICATIONS

ITEM	PART NO.	PART NAME	QTY
2	500 001 123	'O' RING	2
1	159 326 001	BODY	1

LET	REVISION	DATE	DRN	CHK	REL

UNLESS OTHERWISE SPECIFIED
DIMENSION TOL
.x =±.030
.xx =±.015
.xxx=±.005
ANGLE TOL ±½
FINISH 80√
REMOVE ALL BURRS

TITLE: DIRECT MOUNTED BODY. DANFOSS SERIES OMT MOTORS WITH DUAL CROSS PORTED T-10A CAVITIES

CADD SCALE	REF.	MATERIAL
1:1	CATALOGUE	ALUMINIUM

DRAWN	CHECK	RELEASE	HEAT TREAT & FINISH
CCMacNeill	HG		
DATE 16 JUL 94	DATE 27 MAR 95	DATE	

REVISION | PART NO. WLX

sun hydraulics LIMITED
WHELER ROAD, WHITLEY,
COVENTRY, CV3 4LA ENGLAND
TELEPHONE (0203) 307696