


SYMBOL

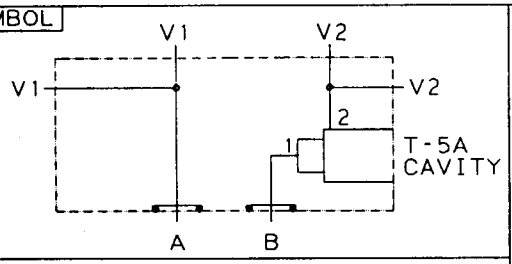

PORTS V1 & V2 = SAE-10

REVISION	PART NO.
	WML

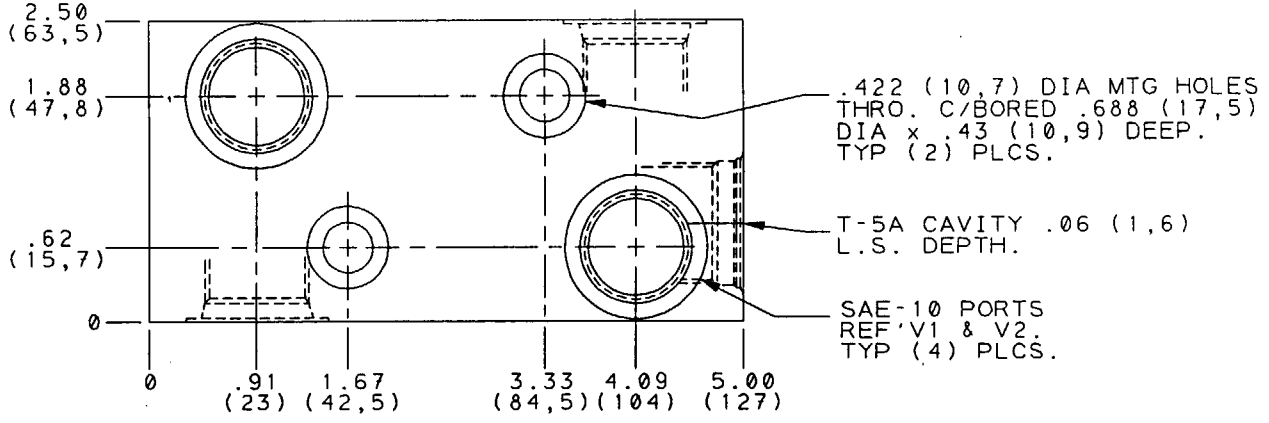

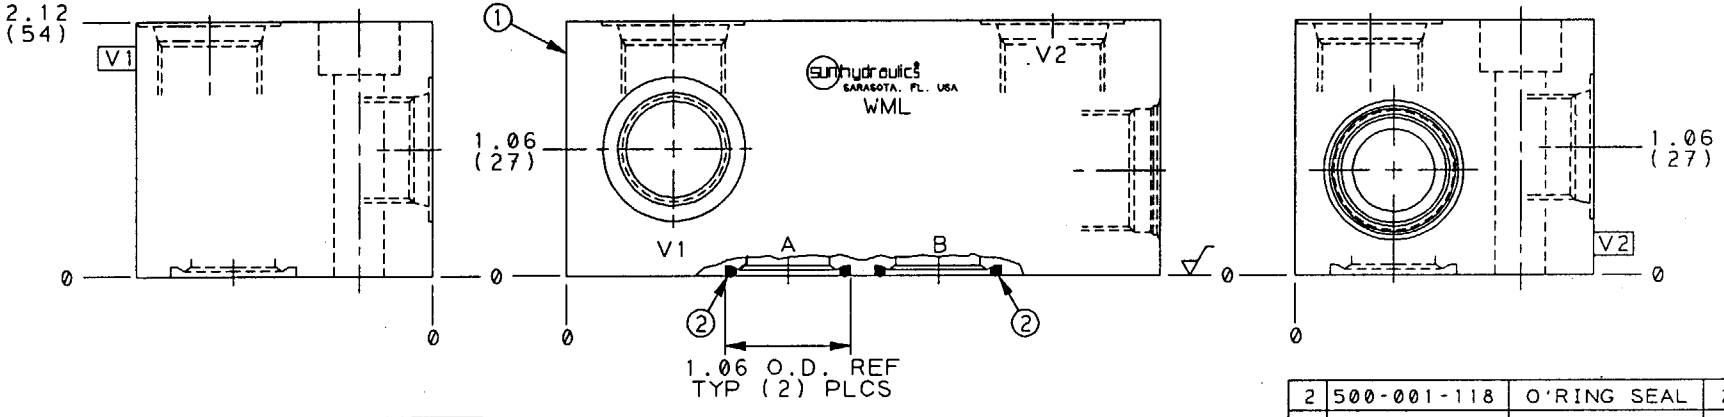

NOTES

1) ALUMINIUM BODIES MAX CONTINUOUS SERVICE PRESSURE 3000 PSI.(210 BAR)
2) THIS BODY WILL INTERFACE ONLY WITH .500 BSPP & .500 NPTF PORTS ON THE DANFOSS OMS MOTOR RANGE.
3) SEALS MATERIAL : BUNA-N.
4) FOR OTHER OPTIONS, SEE OPTIONS CHART
5) DIM'S IN BRACKETS THUS:( ), ARE IN mm
6) DRAWING NOTATION: 3RD ANGLE PROJECTION

ITEM	PART No.	PART NAME	QTY
2	500-001-118	O'RING SEAL	2
1	159-314-002	BODY	1

OUTLINE AND ASSEMBLY DRG

LET	REVISION	DATE	DRN	CHK	REL

UNLESS OTHERWISE SPECIFIED
DIMENSION TOL
.x = ±.030
.xx = ±.015
.xxx = ±.005
ANGLE TOL ±½
FINISH 60√
REMOVE ALL BURRS

TITLE BODY...SINGLE T-5A CAVITY ON B. (DIRECT MTD DANFOSS OMS MOTOR)

REVISION	PART NO.
	WML

SCALE	REF.	MATERIAL
1:2	CATALOGUE DESIGN	ALUMINIUM / S.G.I.

DRAWN	CHECK	RELEASE	HEAT TREAT & FINISH
G. Madden	MS		
DATE 27 NOV 90	DATE 04 OCT 91	DATE	

sun hydraulics CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (813) 355-2983