


.50-14 NPTF PORT


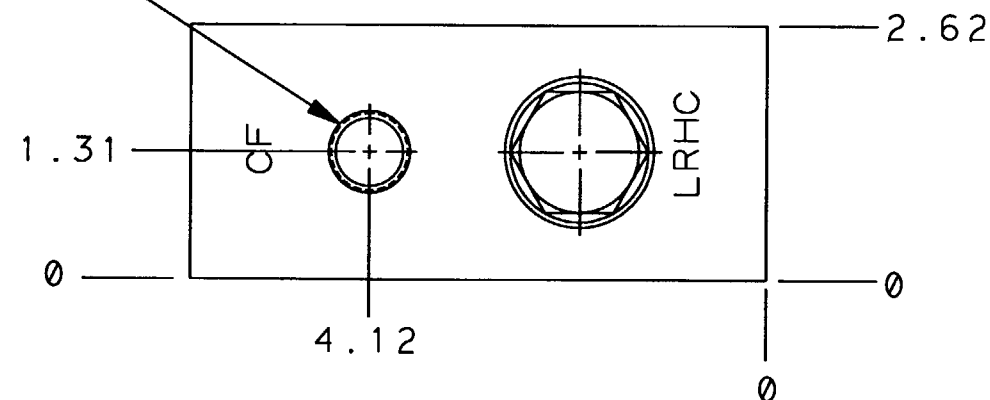


NOTES:


- 1) SEALS: BUNA-N.
- 2) ALUMINUM BODIES-3000 PSI MAXIMUM CONTINUOUS SERVICE PRESSURE.
- 3) ORDERING INFO:
NFEC LEN WNI
THIS BODY
CARTRIDGE TO BE INSTALLED IN T-16A CAVITY. SEAL TYPE IN NFEC DETERMINES ITEM-2 SEAL TYPE

PANEL MOUNTING PROVISIONS:
.375-16 UNC x .62 FULL THD DEPTH TYP (2) PLACES.


T-16A CAVITY L.S. DEPTH=.53

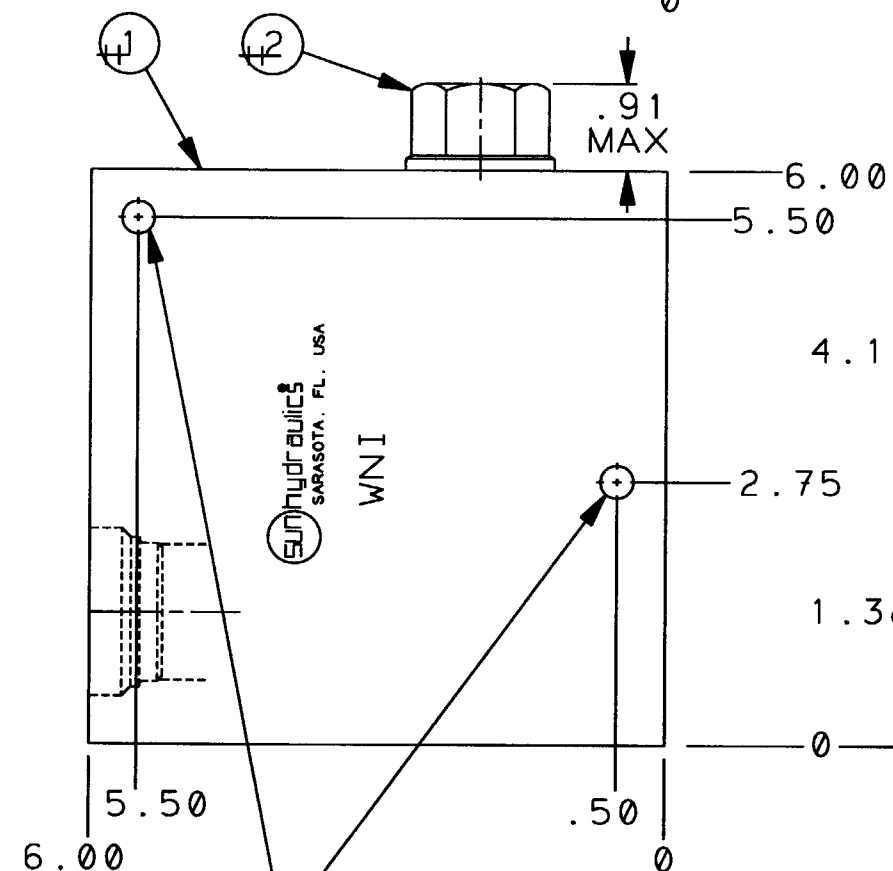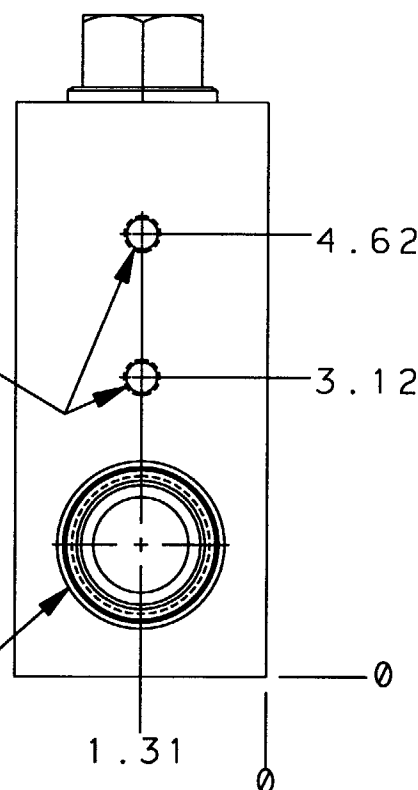

.75-14 NPTF PORTS TYP (2) PLACES

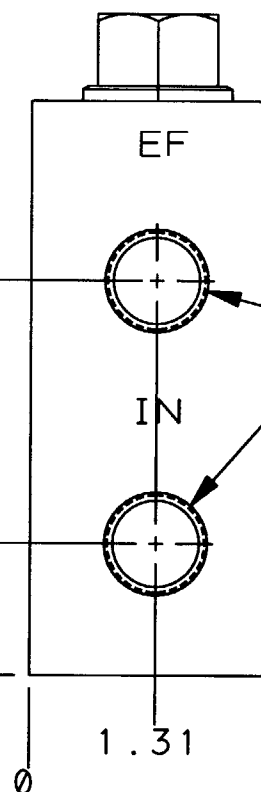

SYMBOL

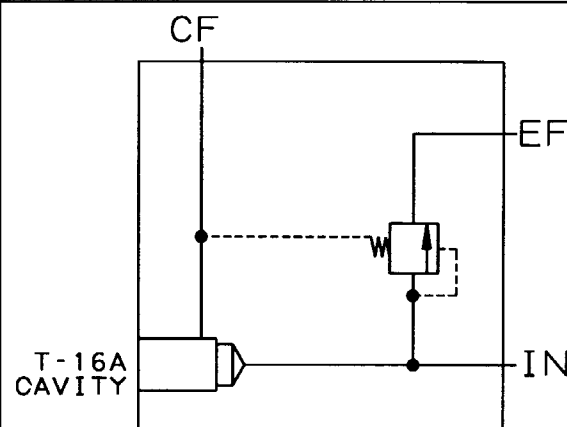

OUTLINE & ASSEM.

2	LRHC XHN	NORMALLY CLOSED MODULATING ELEMENT	1
1	152-437-001	BODY	1
ITEM	PART NO.	PART NAME	QTY

										TITLE NEEDLE VALVE FLOW CONTROL .750 NPTF MAIN PORTS SERIES-3 NEEDLE VALVE NOT SPECIFIED		REVISION A		PART NO. WNI	
										UNLESS OTHERWISE SPECIFIED					
										DIMENSION TOL					
										.x = ±.030					
										.xx = ±.015					
										.xxx = ±.005					
										ANGLE TOL ± 1/2					
										FINISH 80✓					
										REMOVE ALL BURRS					
										SCALE REF.		MATERIAL			
										1/2		ALUMINUM, STEEL, AND NOTED.			
										DRAWN		CHECK		RELEASE	
										R/B		DAS			
										DATE		DATE		DATE	
										8/14/90		8/15/90			
A		ITEM 1 WAS 152-437-002		9-2-92		DAS		9753							
LET		REVISION		DATE		DRN		CHK		REL					



SUN hydraulics[®]
CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (813) 355-2983