
REVISION	PART NO.
	WNM

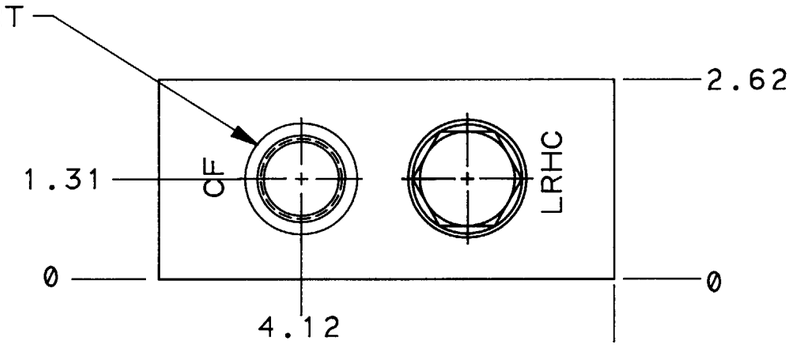

NOTES:


1) SEALS: BUNA-N.


2) ALUMINUM BODIES-3000 PSI MAXIMUM CONTINUOUS SERVICE PRESSURE.


3) ORDERING INFO:

NFEC LEN WNM


- WNM — THIS BODY
- LEN — CARTRIDGE TO BE INSTALLED IN T-16A CAVITY. SEAL TYPE IN NFEC DETERMINES ITEM-2 SEAL TYPE
- NFEC

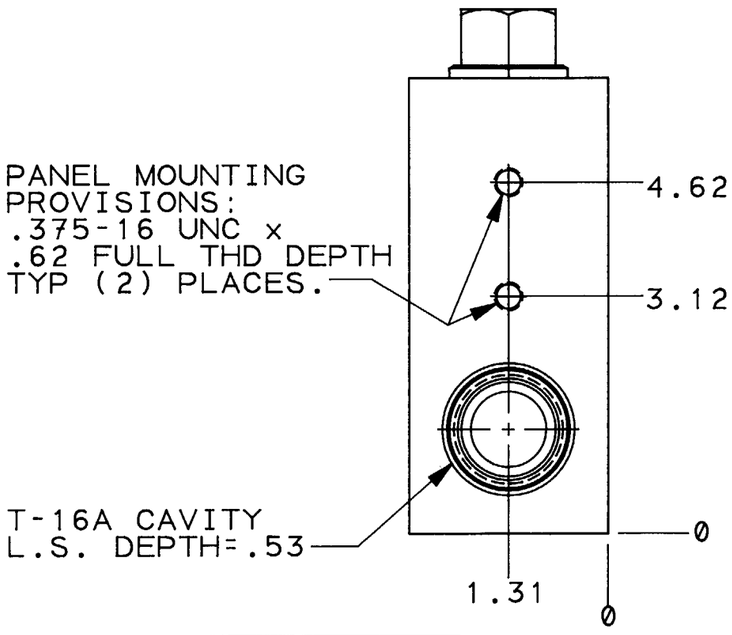

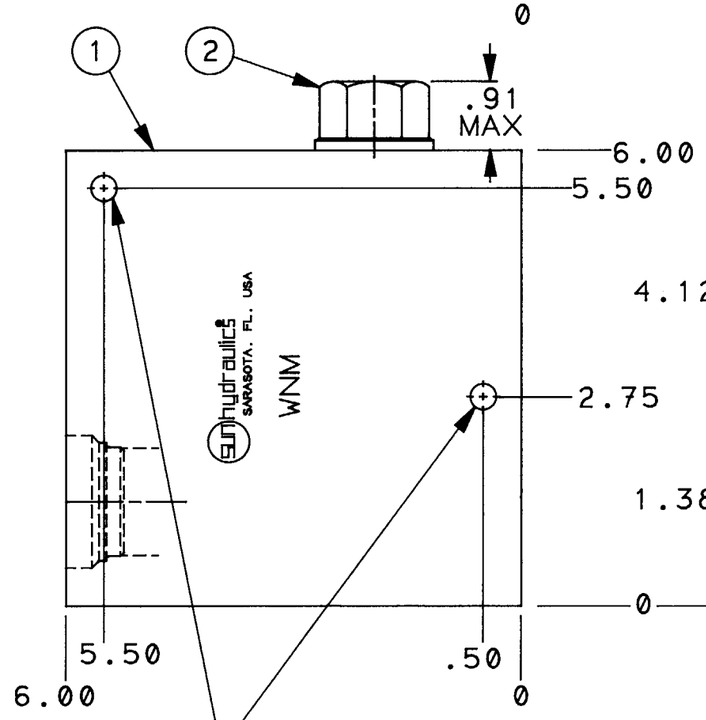

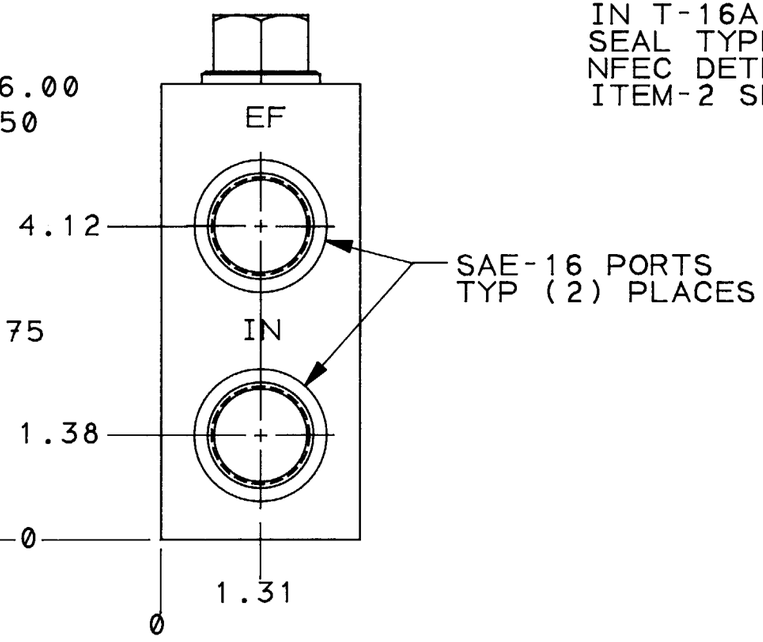

SYMBOL

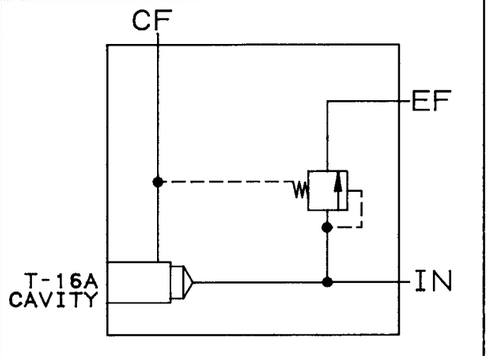

ITEM	PART NO.	PART NAME	QTY
2	LRHC XHN	NORMALLY CLOSED MODULATING ELEMENT	1
1	152-437-005	BODY	1

OUTLINE & ASSEM.

LET	REVISION	DATE	DRN	CHK	REL

UNLESS OTHERWISE SPECIFIED
DIMENSION TOL
.x = ±.030
.xx = ±.015
.xxx = ±.005
ANGLE TOL ±½
FINISH 60√
REMOVE ALL BURRS

TITLE NEEDLE VALVE FLOW CONTROL
SAE-16 MAIN PORTS SERIES-3
NEEDLE VALVE NOT SPECIFIED

REVISION	PART NO.
	WNM

SCALE	REF.	MATERIAL
1/2		ALUMINUM, STEEL, AND NOTED.

DRAWN	CHECK	RELEASE	HEAT TREAT & FINISH
R/B	DAS	2696	
DATE 8/14/90	DATE 8/15/90	DATE 8/16/90	

sun hydraulics CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (813) 355-2983