
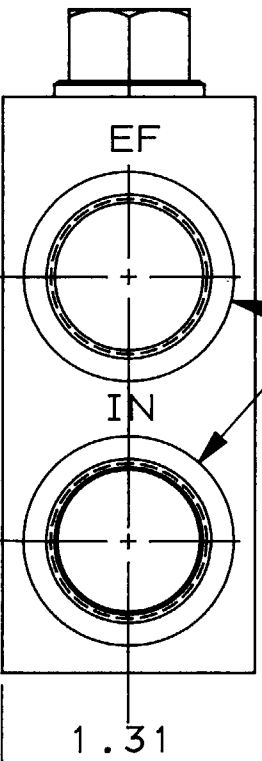
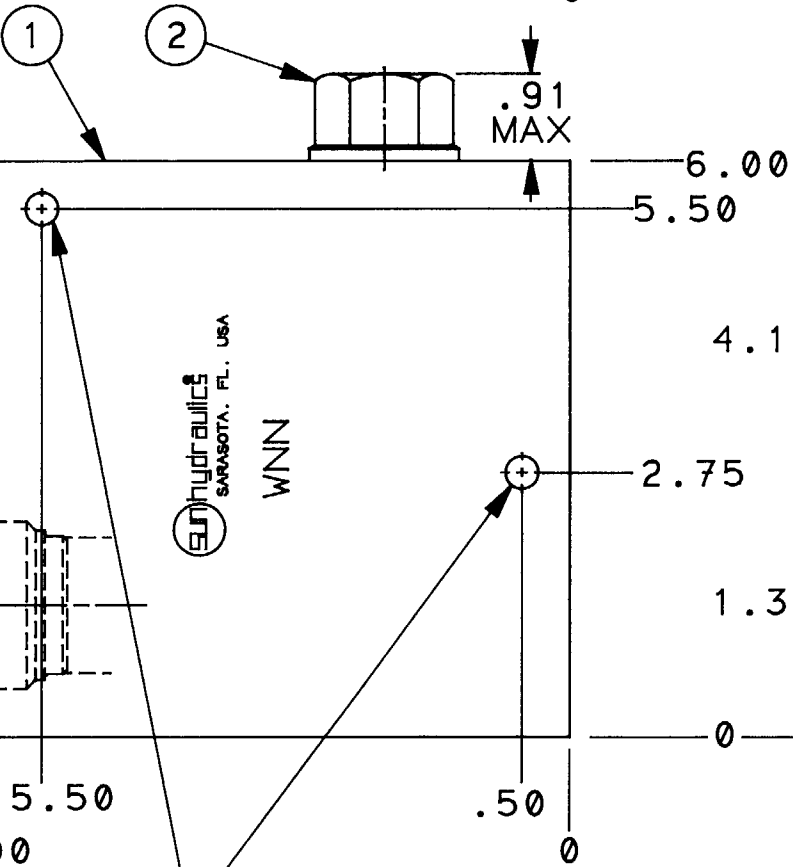


SAE-16 PORT

- NOTES :
- 1) SEALS : BUNA-N.
 - 2) ALUMINUM BODIES-3000 PSI MAXIMUM CONTINUOUS SERVICE PRESSURE.
 - 3) ORDERING INFO:
NFEC LEN WNN
- THIS BODY
- CARTRIDGE TO BE INSTALLED IN T-16A CAVITY. SEAL TYPE IN NFEC DETERMINES ITEM-2 SEAL TYPE


PANEL MOUNTING PROVISIONS:
.375-16 UNC x
.62 FULL THD DEPTH
TYP (2) PLACES.

T-16A CAVITY
L.S. DEPTH=.53

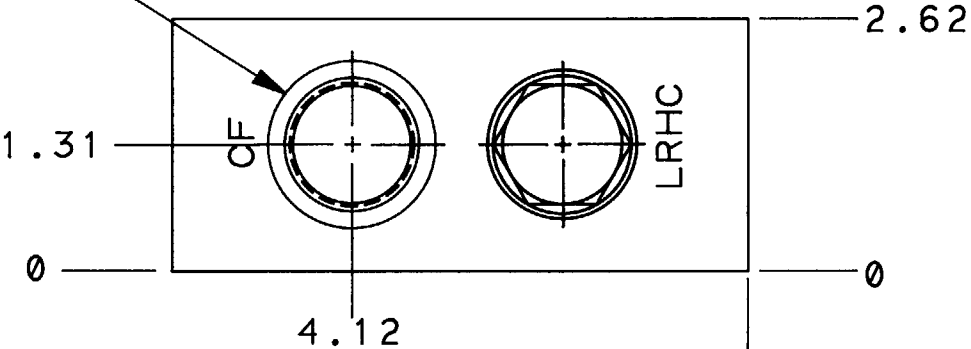

SAE-20 PORTS
TYP (2) PLACES

THRU MOUNTING PROVISIONS
.34 DIA. THRU TYP (2) PLACES

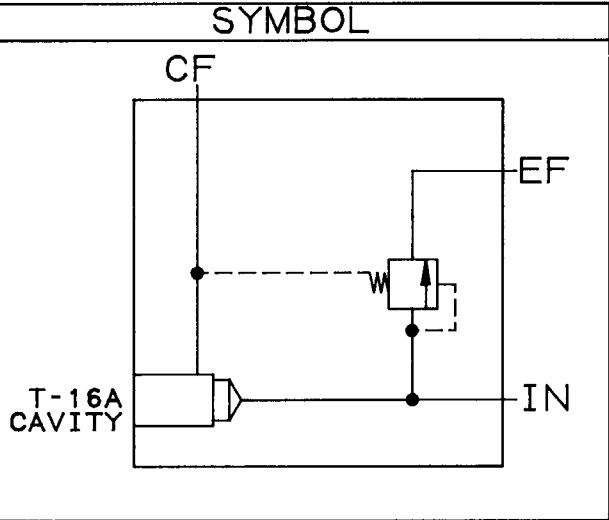

2	LRHC XHN	NORMALLY CLOSED MODULATING ELEMENT	1
1	152-437-006	BODY	1
ITEM	PART NO.	PART NAME	QTY

OUTLINE & ASSEM.

TITLE NEEDLE VALVE FLOW CONTROL SAE-20 MAIN PORTS SERIES-3 NEEDLE VALVE NOT SPECIFIED				REVISION		PART NO.	
UNLESS OTHERWISE SPECIFIED				WNN			
DIMENSION TOL				SCALE		MATERIAL	
.x = ±.030				1/2		ALUMINUM, STEEL, AND NOTED.	
.xx = ±.015				REF.		HEAT TREAT & FINISH	
.xxx = ±.005				DRAWN		DATE	
ANGLE TOL ± 1/2				CHECK		DATE	
FINISH 80V				R/B		DATE	
REMOVE ALL BURRS				DATE		DATE	
LET				REVISION		DATE	
DATE				DRN		CHK	
REL				DATE		DATE	

SUN hydraulics
CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (813) 355-2983