


.75-14 BSPP PORT


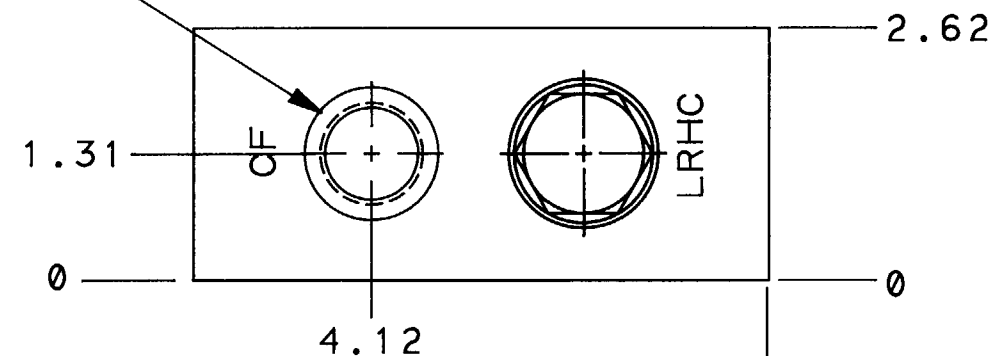


NOTES :

- 1) SEALS : BUNA-N.
- 2) ALUMINUM BODIES-3000 PSI MAXIMUM CONTINUOUS SERVICE PRESSURE.
- 3) ORDERING INFO:
NFEC LEN WNP
THIS BODY
CARTRIDGE TO BE INSTALLED IN T-16A CAVITY. SEAL TYPE IN NFEC DETERMINES ITEM-2 SEAL TYPE


PANEL MOUNTING PROVISIONS:
M10x1.5-6H x .62 FULL THD DEPTH
TYP (2) PLACES.

T-16A CAVITY L.S. DEPTH=.53

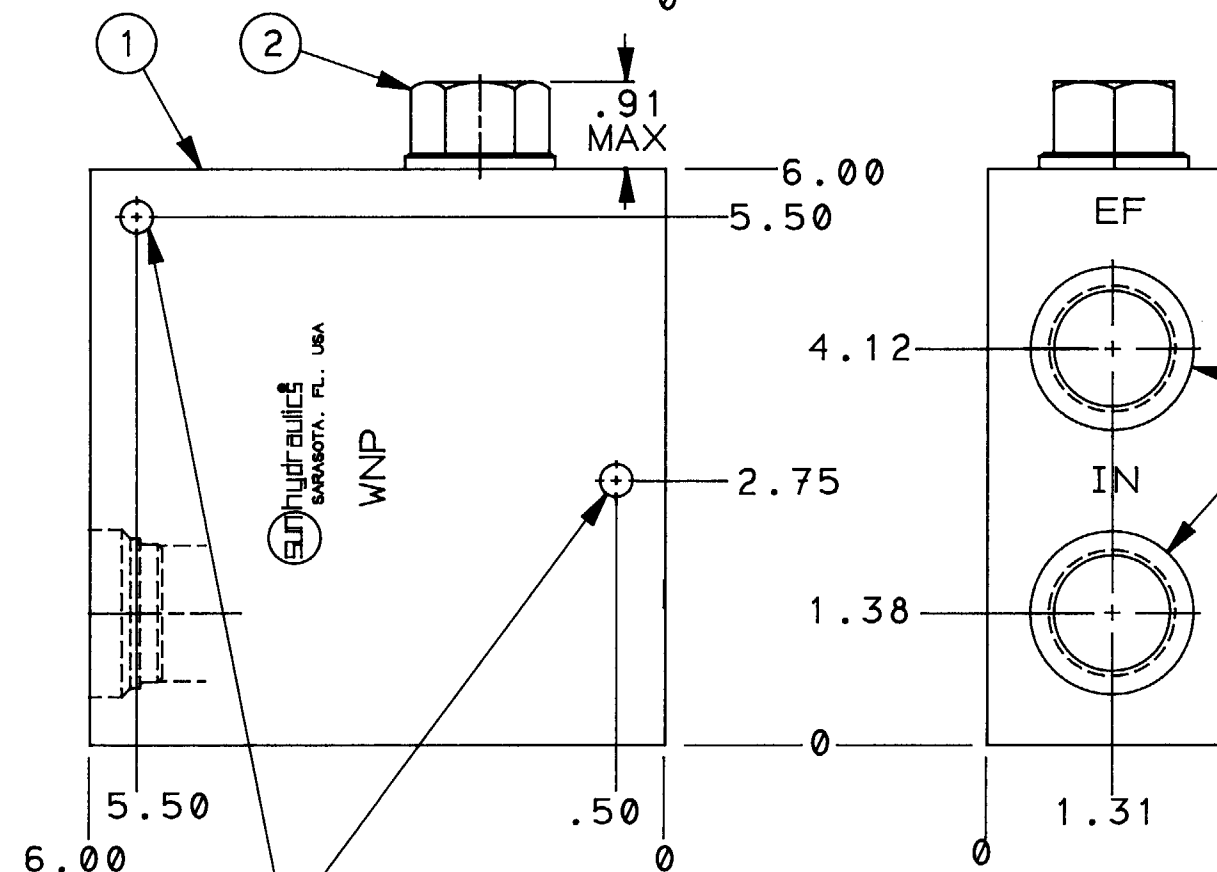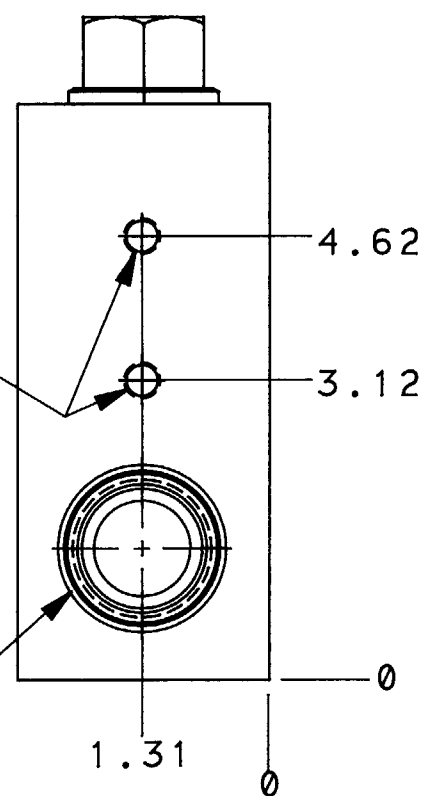

1.00-11 BSPP PORTS
TYP (2) PLACES

SYMBOL

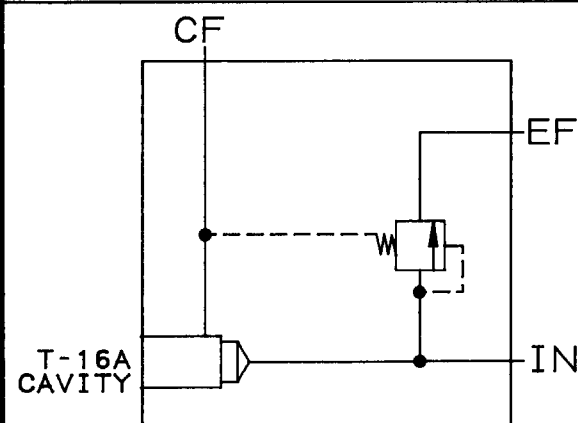

2	LRHC XHN	NORMALLY CLOSED MODULATING ELEMENT	1
1	152-437-008	BODY	1
ITEM	PART NO.	PART NAME	QTY

OUTLINE & ASSEM.

UNLESS OTHERWISE SPECIFIED					TITLE NEEDLE VALVE FLOW CONTROL 1.00 BSPP MAIN PORTS SERIES-3 NEEDLE VALVE NOT SPECIFIED		REVISION	PART NO.
DIMENSION TOL					SCALE	REF.	MATERIAL ALUMINUM, STEEL, AND NOTED.	
.x = ±.030					1/2		HEAT TREAT & FINISH	
.xx = ±.015					DRAWN	CHECK	RELEASE	
.xxx = ±.005					R/B	DA	2696	
ANGLE TOL ± 1/2					DATE	DATE	DATE	
FINISH 80					8/14/88	8/15/88	8-16-90	
REMOVE ALL BURRS					SUN hydraulics CORPORATION 1500 UNIVERSITY PARKWAY SARASOTA, FLORIDA 34243, USA TELEPHONE (813) 355-2983			
LET	REVISION	DATE	DRN	CHK	REL	WNP		