


1.00-11.5 BSPP PORT


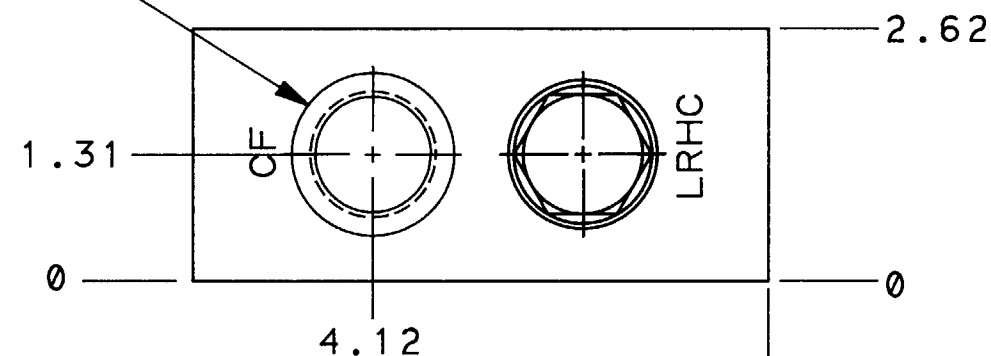


NOTES :

- 1) SEALS : BUNA-N.
- 2) ALUMINUM BODIES-3000 PSI MAXIMUM CONTINUOUS SERVICE PRESSURE.
- 3) ORDERING INFO:
NFEC LEN WNQ
THIS BODY
CARTRIDGE TO BE INSTALLED IN T-16A CAVITY. SEAL TYPE IN NFEC DETERMINES ITEM-2 SEAL TYPE


PANEL MOUNTING PROVISIONS:
M10x1.5-6H x .62 FULL THD DEPTH
TYP (2) PLACES.

T-16A CAVITY L.S. DEPTH=.53

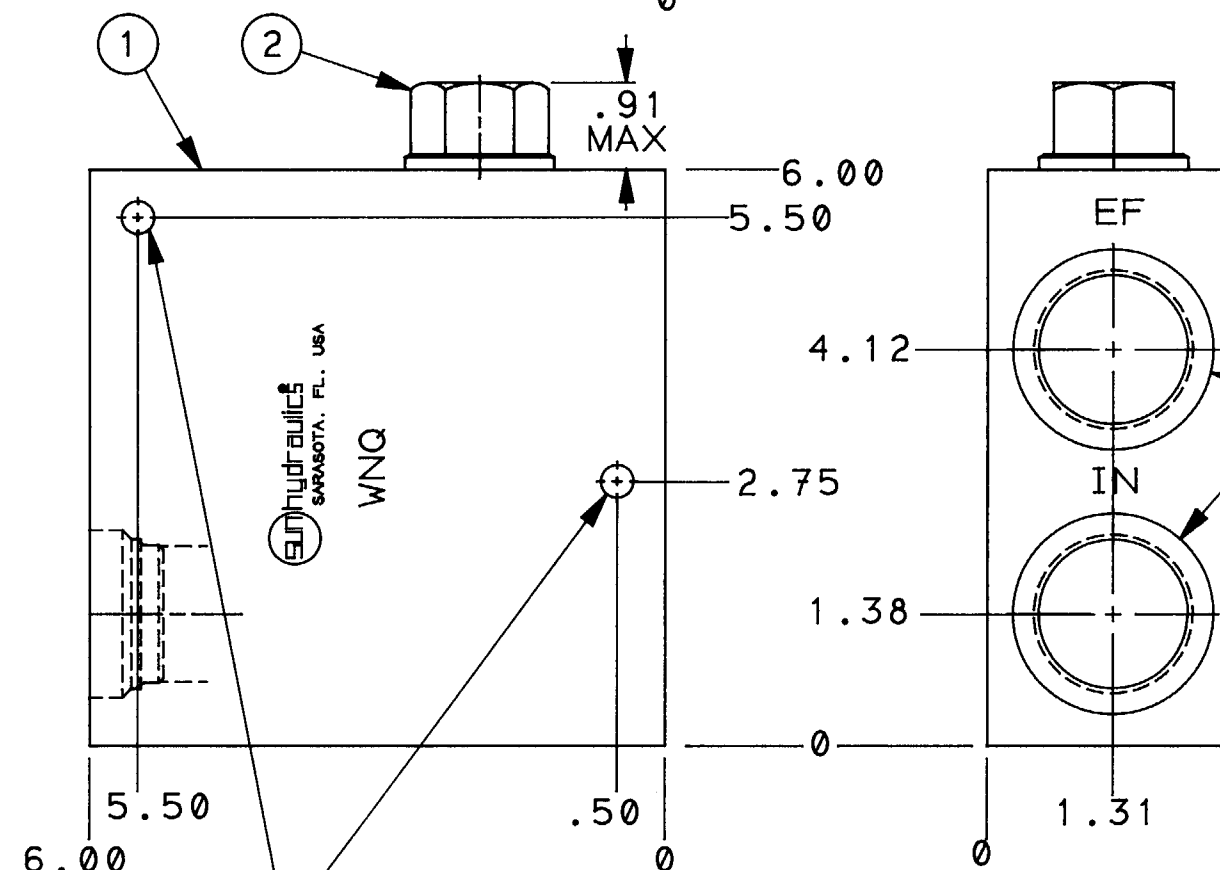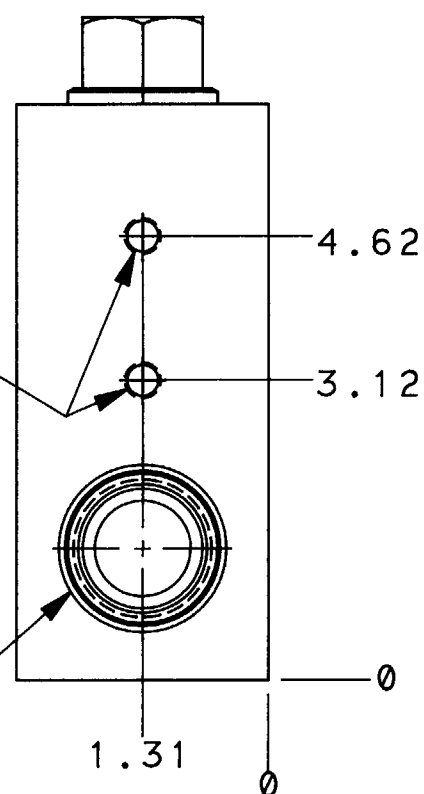

1.25-11.5 BSPP PORTS
TYP (2) PLACES

SYMBOL

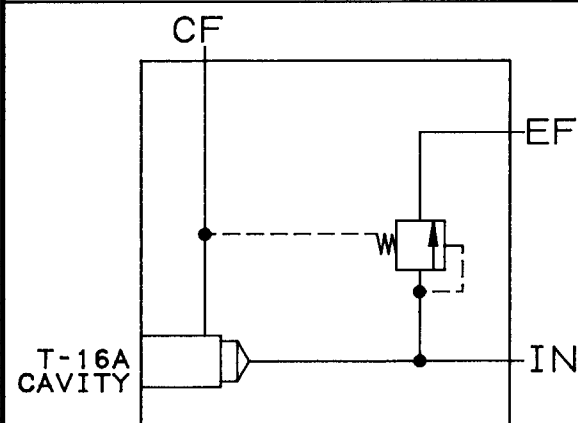

2	LRHC XHN	NORMALLY CLOSED MODULATING ELEMENT	1
1	152-437-009	BODY	1
ITEM	PART NO.	PART NAME	QTY

OUTLINE & ASSEM.

					UNLESS OTHERWISE SPECIFIED	TITLE NEEDLE VALVE FLOW CONTROL 1.25 BSPP MAIN PORTS SERIES-3 NEEDLE VALVE NOT SPECIFIED			REVISION	PART NO.
					DIMENSION TOL	SCALE	REF.	MATERIAL	WNQ	
					.x = ±.030	1/2		ALUMINUM, STEEL, AND NOTED.		
					.xx = ±.015			HEAT TREAT & FINISH		
					.xxx = ±.005					
					ANGLE TOL ± 1/2	DRAWN	CHECK	RELEASE		
					FINISH 80✓	R/B	DAS	2696		
					REMOVE ALL BURRS	DATE	DATE	DATE		
						8/14/99	8/15/99	8-16-90		
LET	REVISION				DATE	DRN	CHK	REL		