

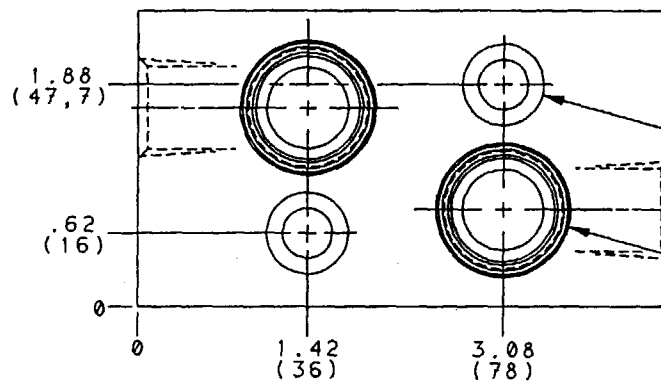
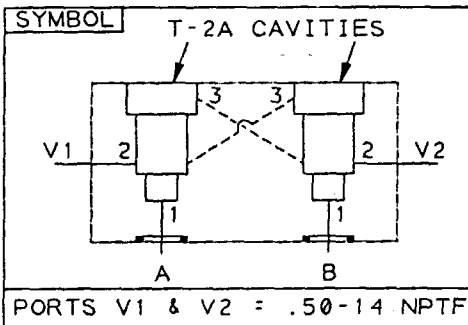
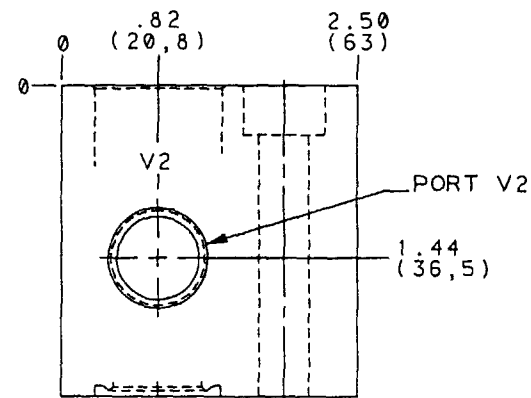


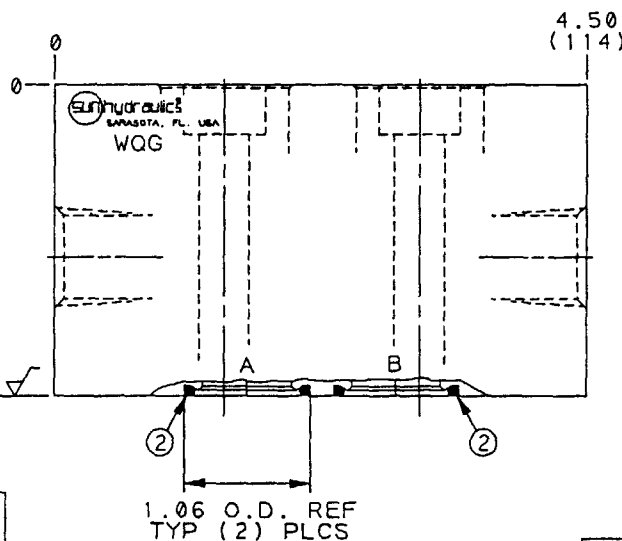

2-OFF MTG HOLES .422 (10,7) DIA
THRO C/BORED .688 (17,5) DIA x
.43 (11) DEEP. TYP (2) PLACES.

T-2A CAVITIES .72 (18,3)
L.S. DEPTH. TYP (2) PLACES.

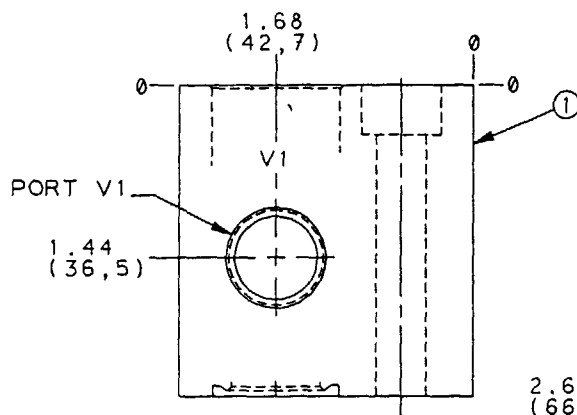

NOTES

- 1) ALUMINIUM BODIES MAX CONTINUOUS SERVICE PRESSURE 3000 PSI. (210 BAR)
- 2) THIS BODY WILL INTERFACE ONLY WITH .500 BSPP & .500 NPTF PORTS ON THE DANFOSS OMS MOTOR RANGE.
- 3) SEALS MATERIAL: BUNA-N.
- 4) FOR OTHER OPTIONS, SEE OPTIONS CHART
- 5) DIM'S IN BRACKETS THUS: (), ARE IN mm
- 6) DRAWING NOTATION:

LET	REVISION	DATE	DRN	CHK	REL

UNLESS OTHERWISE SPECIFIED
DIMENSION TOL
.X ±.030
.XX ±.015
.XXX ±.005
ANGLE TOL ±.5°
FINISH 80/
REMOVE ALL BURRS

OUTLINE AND ASSEMBLY DRG			
TITLE BODY... DUAL T-2A CAVITIES ON A & B. (DIRECT MTD DANFOSS OMS MOTOR)			
SCALE REF. 1:1	CATALOGUE DESIGN	MATERIAL ALUMINIUM / STEEL	
DRAWN G. Madigan	CHECK CCM	RELEASE 3547	HEAT TREAT & FINISH
DATE NOV 98	DATE DEC 98	DATE 2-76	DATE 92

2	500-001-118	O-RING SEAL	2
1	159-339-001	BODY	1
ITEM	PART No.	PART NAME	QTY
REVISION PART NO. WQG			
1500 UNIVERSITY PARKWAY SARASOTA, FLORIDA 34243, USA TELEPHONE (813) 355-2343			