

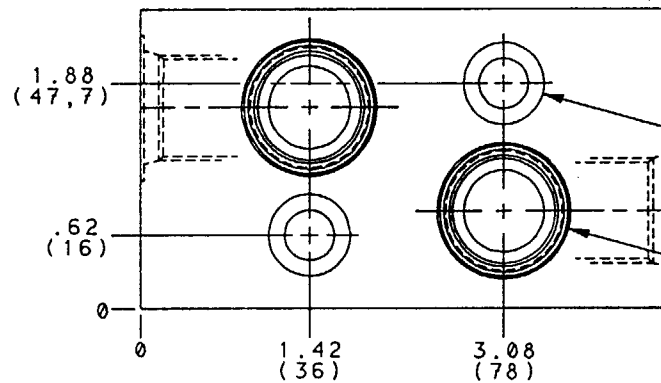
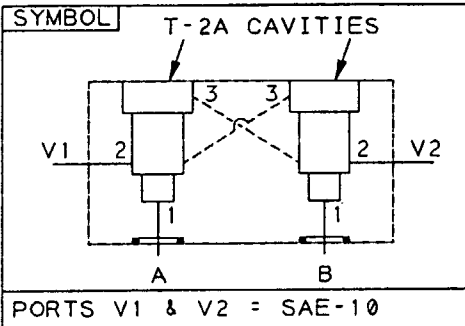
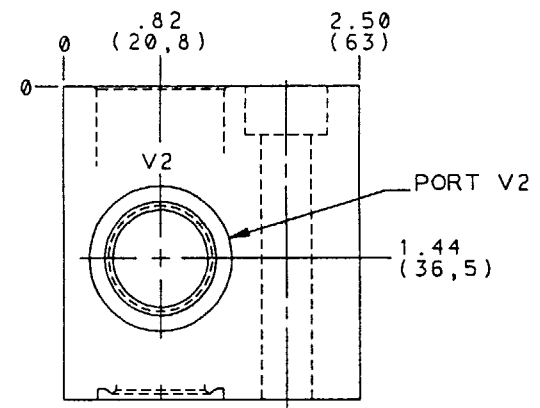


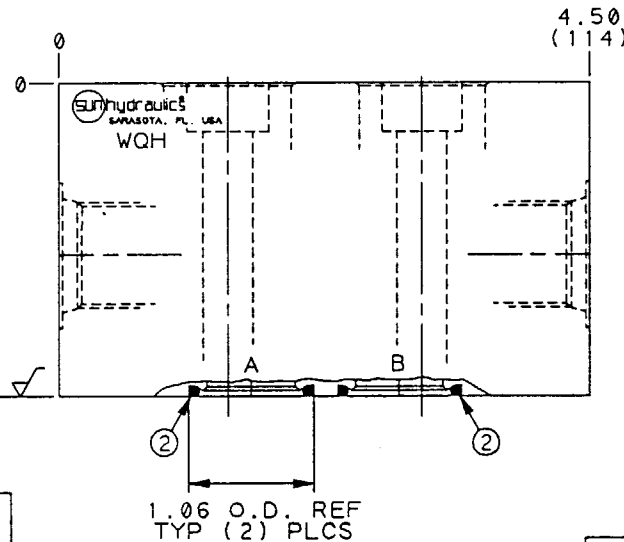

2-OFF MTG HOLES .422 (10,7) DIA
THRO C/BORED .688 (17,5) DIA x
.43 (11) DEEP. TYP (2) PLACES.

T-2A CAVITIES .72 (18,3)
L.S. DEPTH. TYP (2) PLACES.

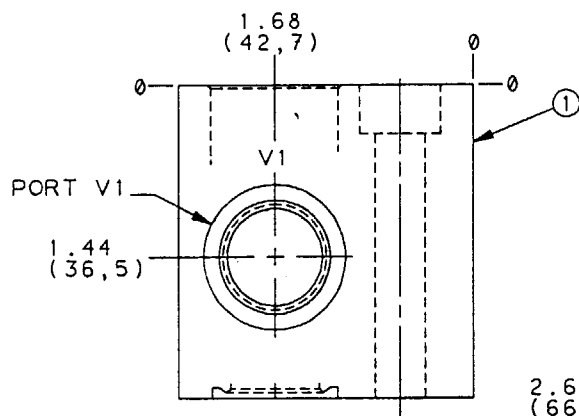

NOTES

- 1) ALUMINIUM BODIES MAX CONTINUOUS SERVICE PRESSURE 3000 PSI. (210 BAR)
- 2) THIS BODY WILL INTERFACE ONLY WITH .500 BSPP & .500 NPTF PORTS ON THE DANFOSS OMS MOTOR RANGE.
- 3) SEALS MATERIAL : BUNA-N.
- 4) FOR OTHER OPTIONS, SEE OPTIONS CHART
- 5) DIM'S IN BRACKETS THUS: (), ARE IN mm
- 6) DRAWING NOTATION:
3RD ANGLE PROJECTION

LET	REVISION	DATE	DRN	CHK	REL

UNLESS OTHERWISE SPECIFIED			
DIMENSION	TOL	SCALE	REF.
.X	±.030	1:1	CATALOGUE DESIGN
.XX	±.015		
.XXX	±.005		
ANGLE	TOL ±.5°		
FINISH	80V		
REMOVE ALL	BURRS		
DATE	NOV 98	DATE	DEC 98
DATE	2-26-02	DATE	

OUTLINE AND ASSEMBLY DRG		REVISION PART NO.	
TITLE	BODY...DUAL T-2A CAVITIES ON A & B (DIRECT MTD DANFOSS OMS MOTOR)	REVISION	WQH
SCALE	1:1	PART No.	500-001-118
MATERIAL	ALUMINIUM / STEEL	PART NAME	O-RING SEAL
HEAT TREAT & FINISH		QTY	2
DATE	NOV 98	DATE	DEC 98
DATE	2-26-02	DATE	

SUN hydraulics
CORPORATION