


SYMBOL

T-2A CAVITY




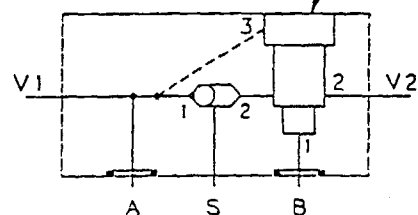


PORTS V1 & V2 = .50-14 NPTF

PORT S = SAE-4
EXTERNAL CONNECTION IN END
OF SHUTTLE CARTRIDGE


REVISION PART NO.

WQJ

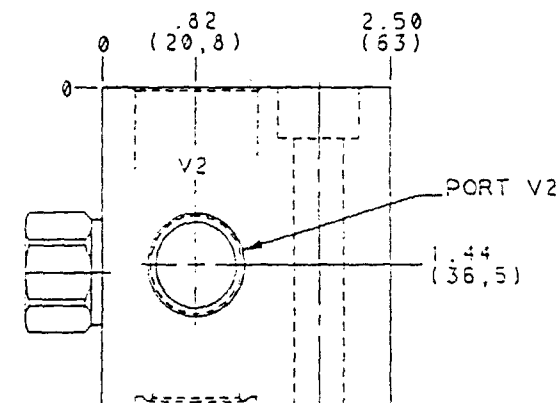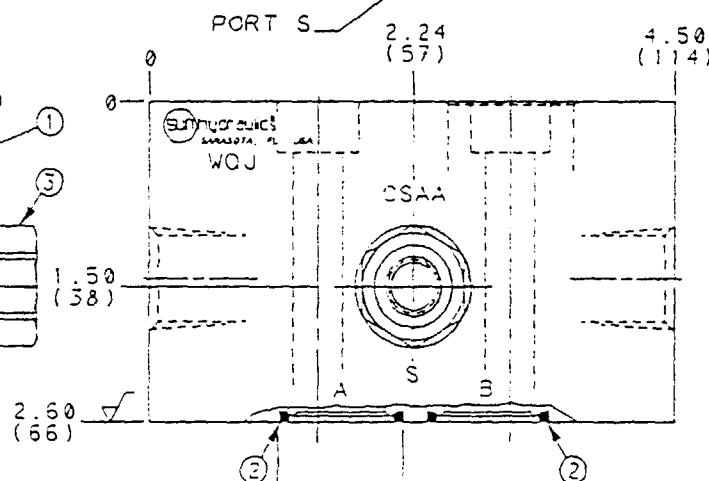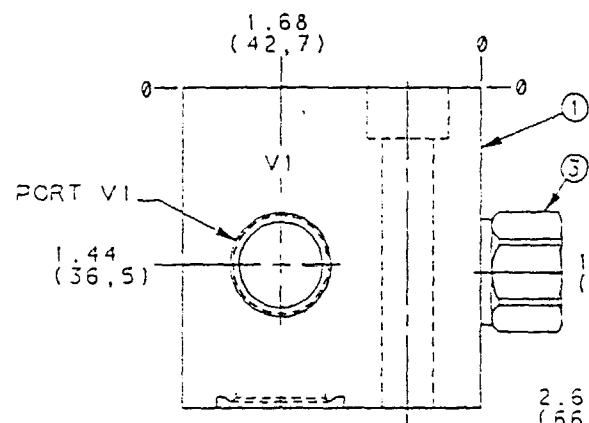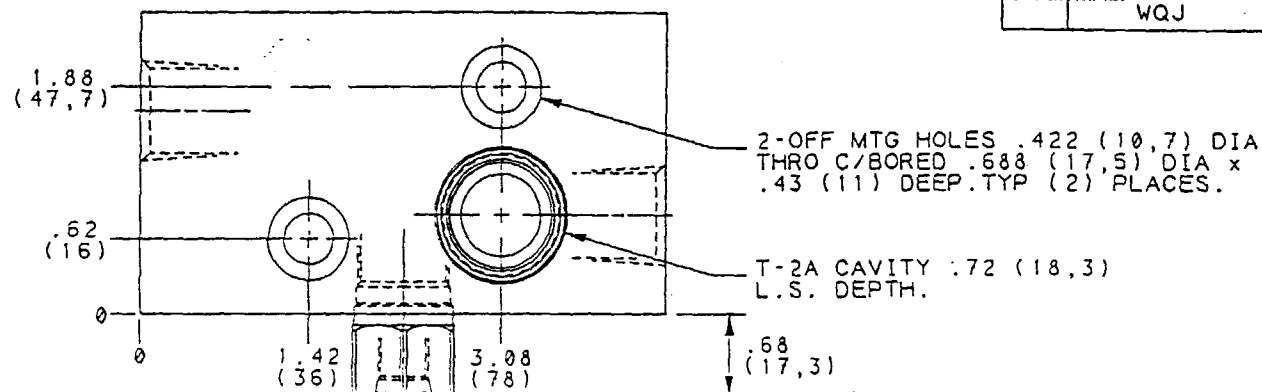

NOTES

- 1) ALUMINIUM BODIES MAX CONTINUOUS SERVICE PRESSURE 3000 PSI. (210 BAR)
- 2) THIS BODY WILL INTERFACE ONLY WITH .500 BSPP & .500 NPTF PORTS ON THE DANFOSS OMS MOTOR RANGE.
- 3) SEALS MATERIAL : BUNA-N.
- 4) FOR OTHER OPTIONS, SEE OPTIONS CHART
- 5) DIM'S IN BRACKETS THUS: (), ARE IN MM
- 6) DRAWING NOTATION: 3RD ANGLE PROJECTION



**OUTLINE AND
ASSEMBLY DRG**

3 CSAA-EXN	SHUTTLE CART	1
2 500-001-118	O-RING SEAL	2
1 159-338-001	BODY	1
1	PART No.	QTY
	PART NAME	

REVISION	DATE	ORIGIN	REL

TITLE BODY... SINGLE T-2A CAVITY ON B WITH BRAKE SHUTTLE (DIRECT MTD DANFOSS OMS MOTOR)			
SCALE (REF. 1:1) CATALOGUE DESIGN			
UNLESS OTHERWISE SPECIFIED	DRAWN	CHECK	RELEASE
DIMENSION TOL	G. HADLAND	CCM	
.X ±.030	DATE	DATE	DATE
.XX ±.015	NOV 90	DEC 90	
.XXX ±.005			
ANGLE TOL ± 1/4			
FINISH 80V			
REMOVE ALL BURRS			

REVISION PART NO. WQJ

SUN hydraulics
CORPORATION
1500 UNIVERSITY PARKWAY
SHALLOTTA, FLORIDA 32610, USA
TELEPHONE (913) 355-1343