
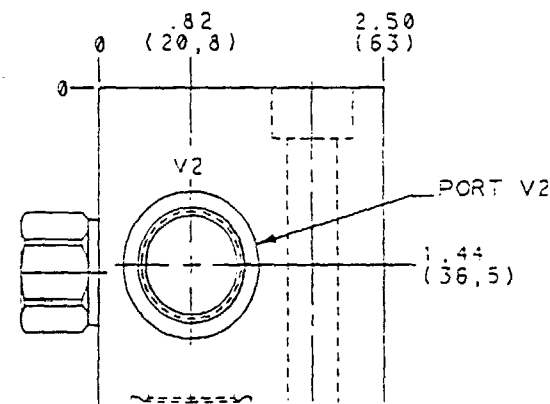
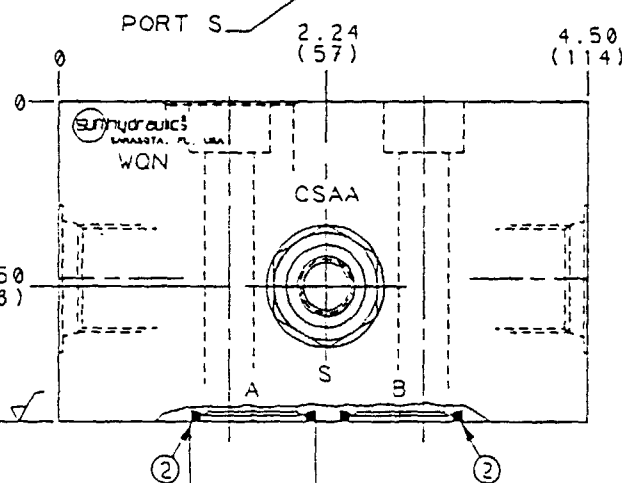
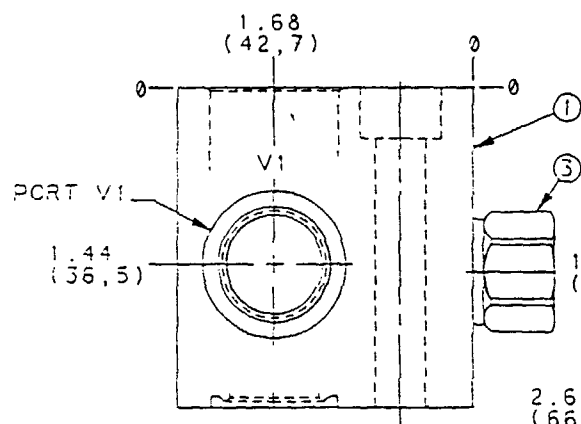
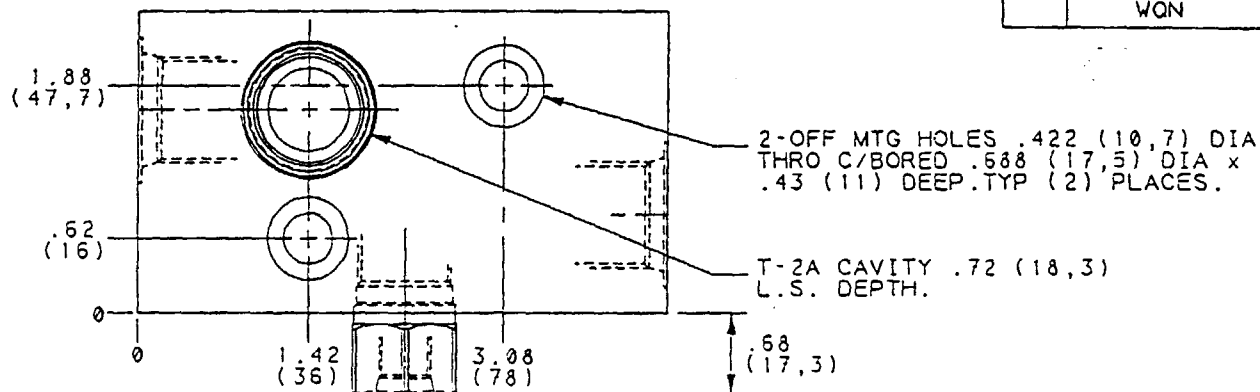


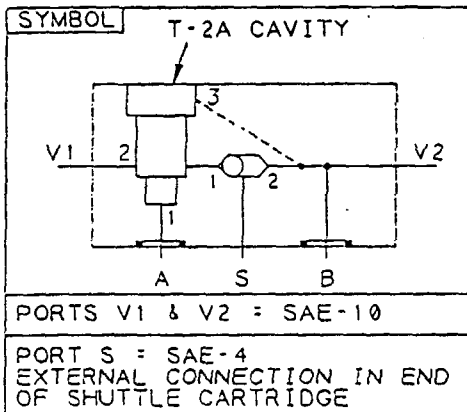

- NOTES**
- 1) ALUMINIUM BODIES MAX CONTINUOUS SERVICE PRESSURE 3000 PSI. (210 BAR)
 - 2) THIS BODY WILL INTERFACE ONLY WITH .500 BSPP & .500 NPTF PORTS ON THE DANFOSS OMS MOTOR RANGE.
 - 3) SEALS MATERIAL : BUNA-N.
 - 4) FOR OTHER OPTIONS, SEE OPTIONS CHART
 - 5) DIM'S IN BRACKETS THUS: (), ARE IN MM
 - 6) DRAWING NOTATION: 3RD ANGLE PROJECTION

3 CSAA-EXN		SHUTTLE CART	1
2 500-001-118		O-RING SEAL	2
1 159-337-002		BODY	1
PART No.		PART NAME	QTY
WQN		WQN	

OUTLINE AND ASSEMBLY DRG			
TITLE BODY... SINGLE T-2A CAVITY ON A WITH BRAKE SHUTTLE (DIRECT MTD DANFOSS OMS MOTOR)			
SCALE REF. 1:1		CATALOGUE DESIGN	
DRAWN G. Wadman		CHECK CCM	RELEASE
DATE NOV 90		DATE DEC 90	DATE

UNLESS OTHERWISE SPECIFIED		DIMENSION TOL	
.X ±.030		.XX ±.015	
.XXX ±.005		ANGLE TOL 3/4	
FINISH 60V		REMOVE ALL BURRS	

LET	REVISION	DATE	DRW/CHK/REL
-----	----------	------	-------------

SUN hydraulics
CORPORATION