
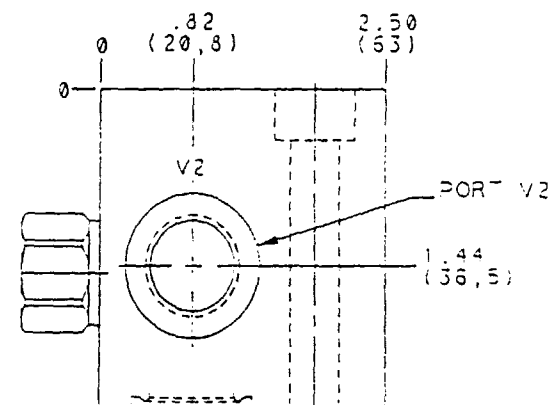
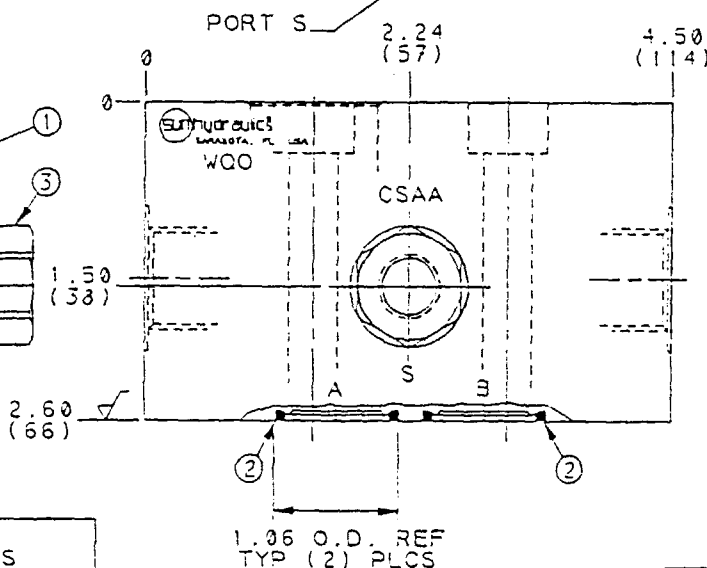
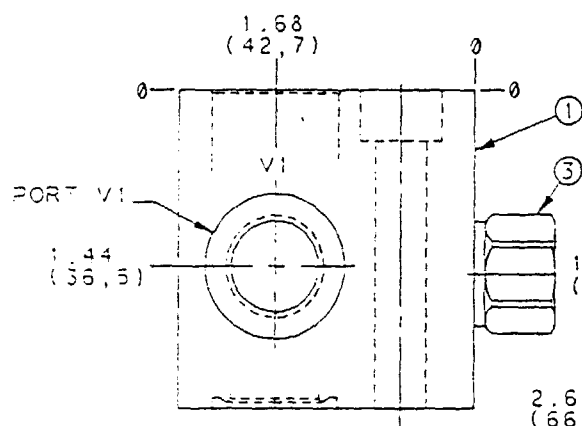
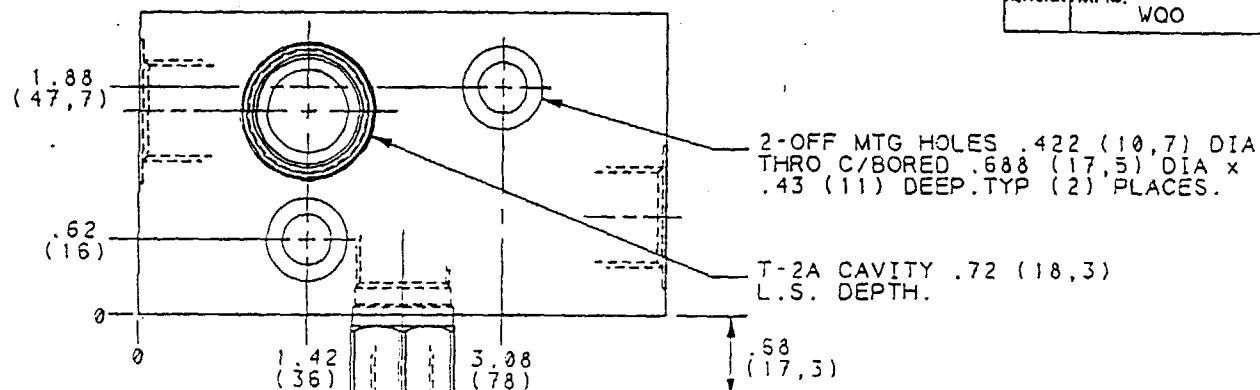


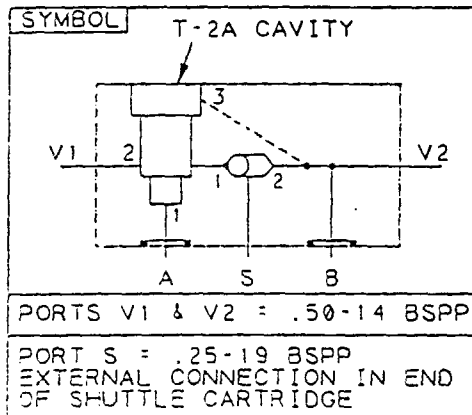

- NOTES**
- 1) ALUMINIUM BODIES MAX CONTINUOUS SERVICE PRESSURE 3000 PSI. (210 BAR)
 - 2) THIS BODY WILL INTERFACE ONLY WITH .500 BSPP & .500 NPTF PORTS ON THE DANFOSS OMS MOTOR RANGE.
 - 3) SEALS MATERIAL: BUNA-N.
 - 4) FOR OTHER OPTIONS, SEE OPTIONS CHART
 - 5) DIM'S IN BRACKETS THUS: (), ARE IN MM
 - 6) DRAWING NOTATION:

3	CSAA-BXN	SHUTTLE CART	1
2	500-001-113	O-RING SEAL	2
1	159-337-003	BODY	1

REV	PART NO.	PART NAME	QTY
1	W00		

TITLE BODY, SINGLE T-2A CAVITY ON A WITH BRAKE SHUTTLE (DIRECT MTD DANFOSS OMS MOTOR)		REVISION PART NO. W00	
SCALE (REF. 1:1)	CATALOGUE DESIGN	MATERIAL ALUMINIUM / STEEL	
DRAWN G. Madden	CHECK CCM	HEAT TREAT & FINISH	
DATE NOV 90	DATE DEC 90	DATE	

UNLESS OTHERWISE SPECIFIED	DIMENSION TOL	FINISH
XX ±.030	XX ±.015	XX ±.005
ANGLE TOL ±X	FINISH 30V	REMOVE ALL BURRS

REVISION	DATE	DRNICKIREL
----------	------	------------

LETI

SUN hydraulics
CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34233, USA
TELEPHONE (813) 355-1343