
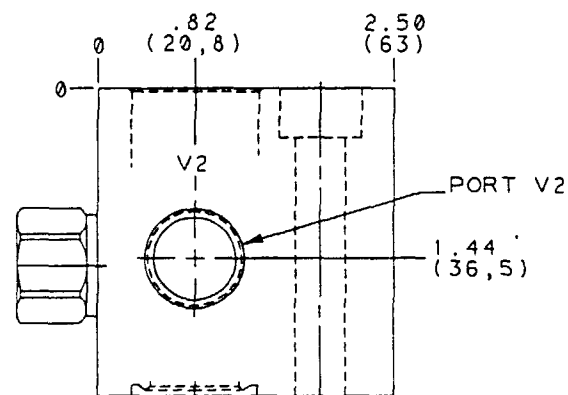
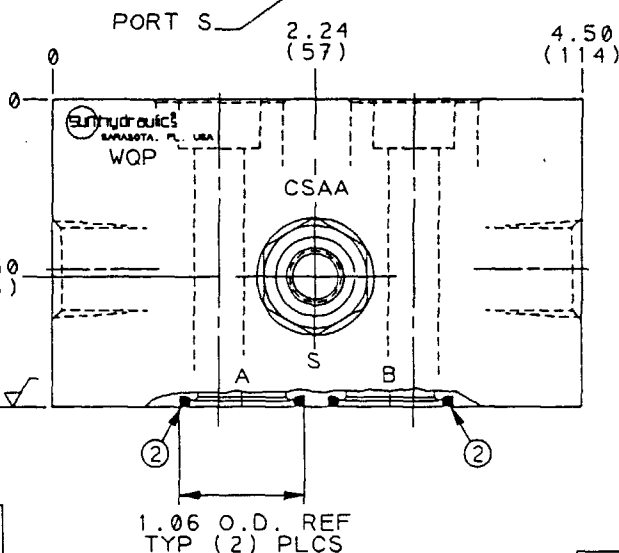
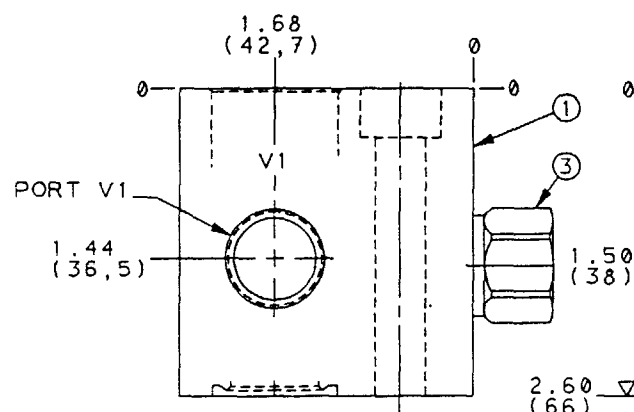
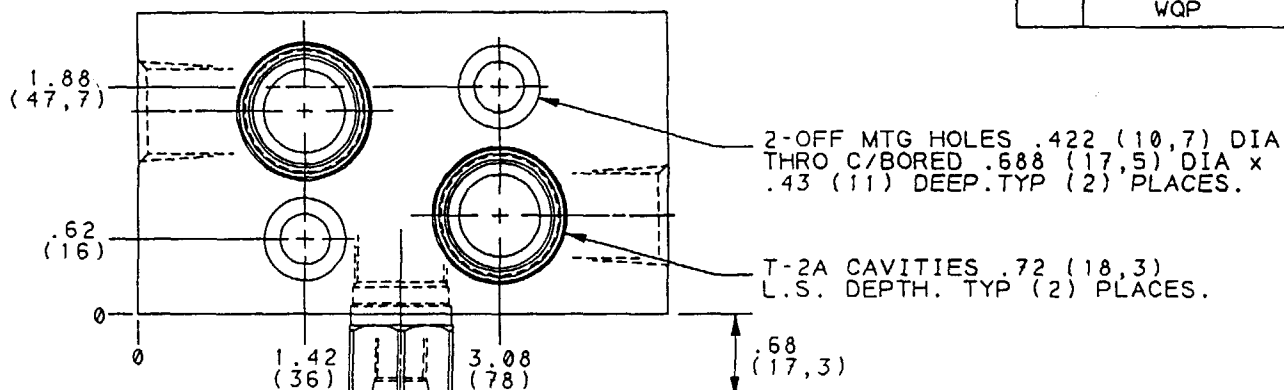


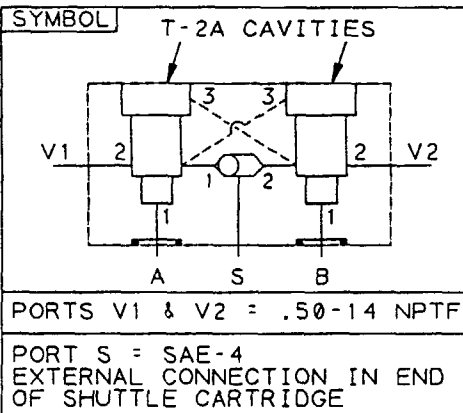

NOTES

- 1) ALUMINIUM BODIES MAX CONTINUOUS SERVICE PRESSURE 3000 PSI. (210 BAR)
- 2) THIS BODY WILL INTERFACE ONLY WITH .500 BSPP & .500 NPTF PORTS ON THE DANFOSS OMS MOTOR RANGE.
- 3) SEALS MATERIAL: BUNA-N.
- 4) FOR OTHER OPTIONS, SEE OPTIONS CHART
- 5) DIM'S IN BRACKETS THUS: (), ARE IN mm
- 6) DRAWING NOTATION:

REVISION	DATE	DRN	CHK	REL
...	15 NOV 1990	GN		
RE-DRAWN ON CADD-WAS CHARTED DRG				
SHOWING NPTF, SAE & BSPP VERSIONS				

OUTLINE AND ASSEMBLY DRG			
TITLE BODY... DUAL T-2A CAVITIES WITH BRAKE SHUTTLE (DIRECT MTD DANFOSS OMS MOTOR)	SCALE REF. 1:1	CATALOGUE DESIGN	MATERIAL ALUMINIUM / STEEL
DRAWN Q. Madden	CHECK CCM	RELEASE	HEAT TREAT & FINISH
DATE NOV 90	DATE DEC 90	DATE	

REVISION PART NO.	WQP
3 CSAA-EXN	SHUTTLE CART
2 500-001-118	O-RING SEAL
1 159-336-001	BODY
PART No.	PART NAME
REVISION PART NO.	WQP

SUN hydraulics
CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (813) 355-2383