

SYMBOL

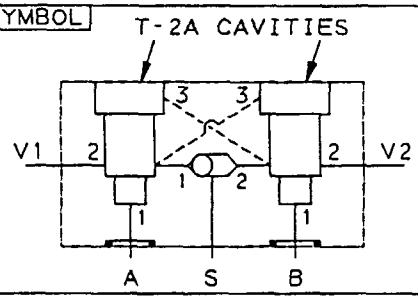


PORTS V1 & V2 = SAE-10

PORT S = SAE-4
EXTERNAL CONNECTION IN END OF SHUTTLE CARTRIDGE

REVISION	PART NO.
	WQQ

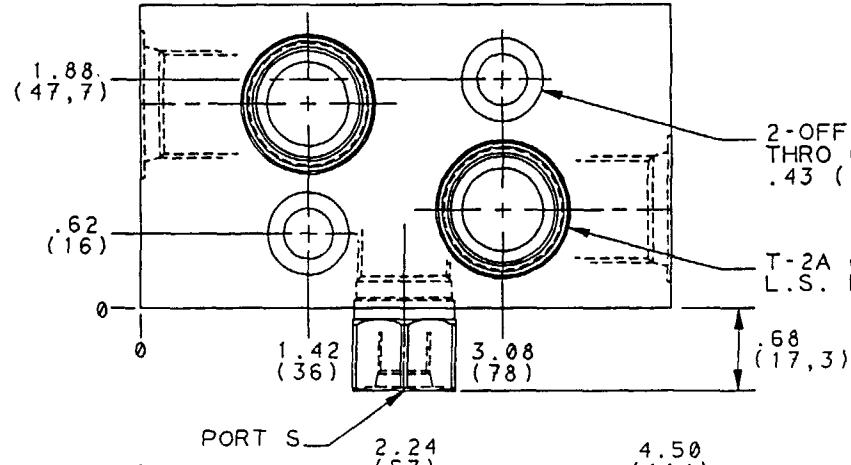

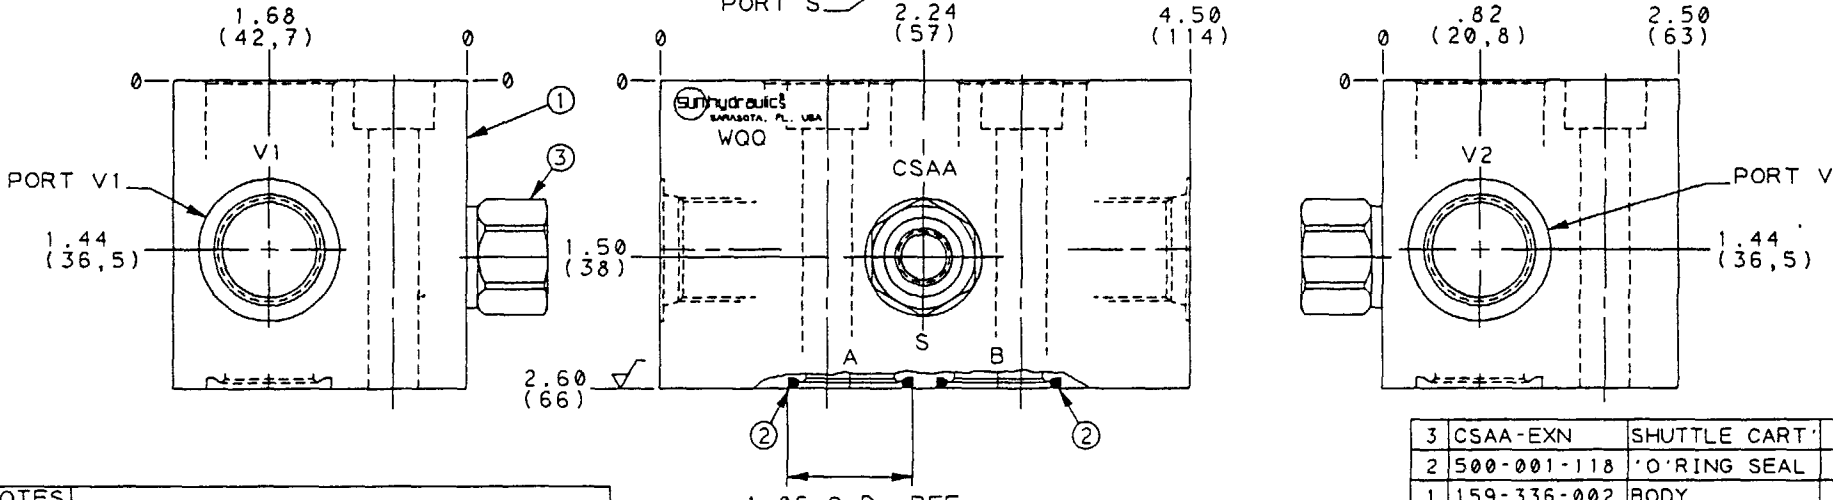

ITEM	PART No.	PART NAME	QTY
3	CSAA-EXN	SHUTTLE CART'	1
2	500-001-118	'O'RING SEAL	2
1	159-336-002	BODY	1

OUTLINE AND ASSEMBLY DRG

NOTES

1) ALUMINIUM BODIES MAX CONTINUOUS SERVICE PRESSURE 3000 PSI.(210 BAR)
2) THIS BODY WILL INTERFACE ONLY WITH .500 BSPP & .500 NPTF PORTS ON THE DANFOSS OMS MOTOR RANGE.
3) SEALS MATERIAL : BUNA-N.
4) FOR OTHER OPTIONS, SEE OPTIONS CHART
5) DIM'S IN BRACKETS THUS:( ), ARE IN mm
6) DRAWING NOTATION: 3RD ANGLE PROJECTION

LET	REVISION	DATE	DRN	CHK	REL
---	RE-DRAWN ON CADD-WAS CHARTED DRG	15 NOV	GH		
	SHOWING NPTF;SAE & BSPP VERSIONS	1998			

UNLESS OTHERWISE SPECIFIED
DIMENSION TOL
.x ±.030
.xx ±.015
.xxx ±.005
ANGLE TOL ±½°
FINISH 63√
REMOVE ALL BURRS

TITLE BODY...DUAL T-2A CAVITIES WITH BRAKE SHUTTLE (DIRECT MTD DANFOSS OMS MOTOR)

SCALE	REF.	MATERIAL
1:1	CATALOGUE DESIGN	ALUMINIUM / STEEL

DRAWN	CHECK	RELEASE	HEAT TREAT & FINISH
G.Maddan	CCM		
DATE NOV 98	DATE DEC 98	DATE	

REVISION	PART NO.
	WQQ

sun hydraulics CORPORATION