
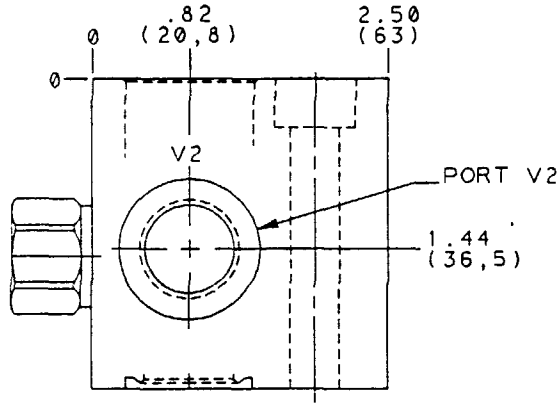
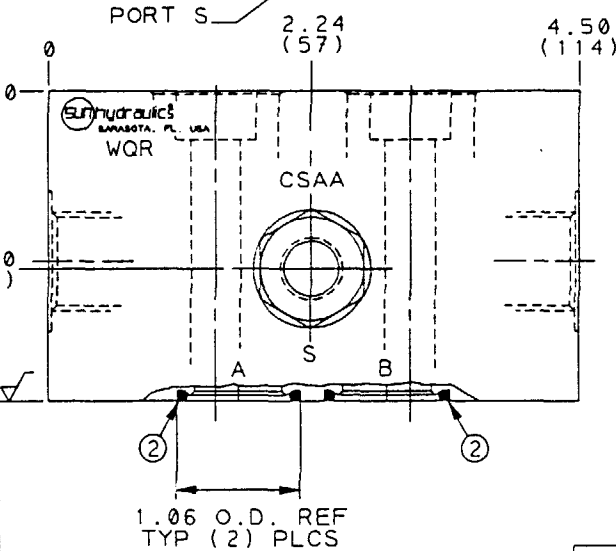
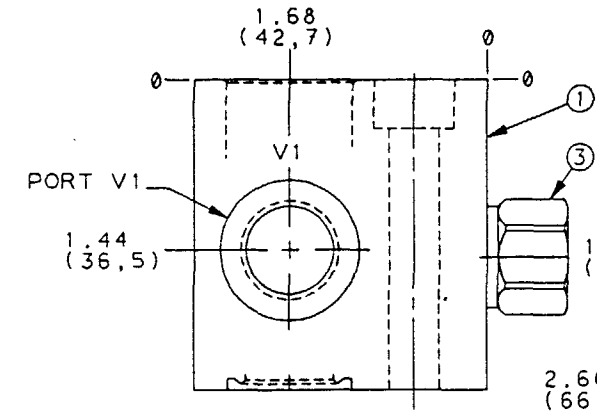
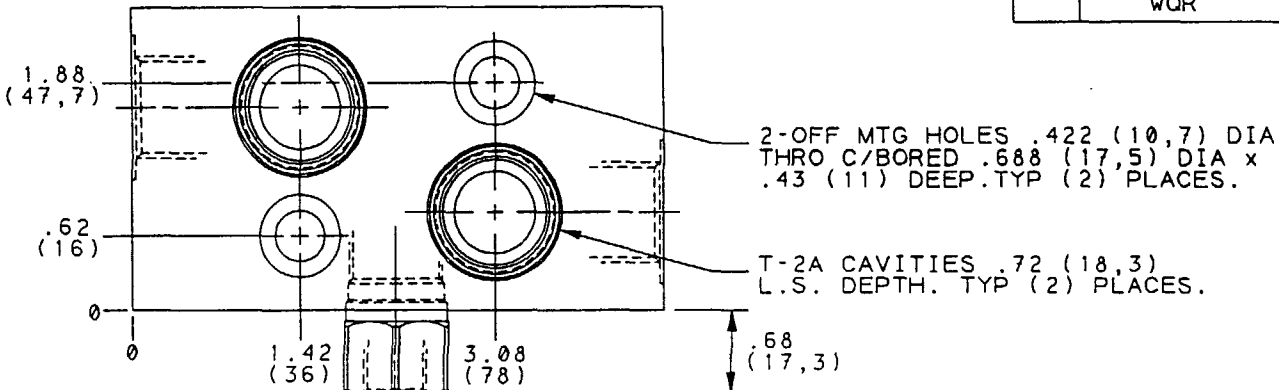


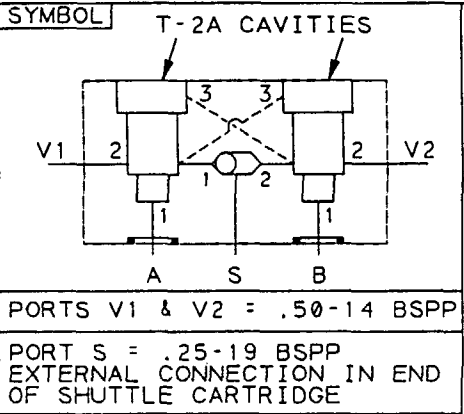

NOTES

- 1) ALUMINIUM BODIES MAX CONTINUOUS SERVICE PRESSURE 3000 PSI. (210 BAR)
- 2) THIS BODY WILL INTERFACE ONLY WITH .500 BSPP & .500 NPTF PORTS ON THE DANFOSS OMS MOTOR RANGE.
- 3) SEALS MATERIAL : BUNA-N.
- 4) FOR OTHER OPTIONS, SEE OPTIONS CHART
- 5) DIM'S IN BRACKETS THUS: (), ARE IN mm
- 6) DRAWING NOTATION: 3RD ANGLE PROJECTION

REVISION	DATE	DRN	CHK	REL
RE-DRAWN ON CADD-VAS CHARTED DRG	15 NOV 1990	GH		
SHOWING NPTF, SAE & BSPP VERSIONS	1990			

OUTLINE AND ASSEMBLY DRG			
TITLE BODY, DUAL T-2A CAVITIES WITH BRAKE SHUTTLE (DIRECT MTD DANFOSS OMS MOTOR)			
SCALE REF. 1:1 CATALOGUE DESIGN		MATERIAL ALUMINIUM / STEEL	
DRAWN G. Madden	CHECK CCM	RELEASE	HEAT TREAT & FINISH
DATE NOV 90	DATE DEC 90	DATE	

3	CSAA-BXN	SHUTTLE CART	1
2	500-001-118	O-RING SEAL	2
1	159-336-003	BODY	1
ITEM	PART No.	PART NAME	QTY
REVISION PART NO.		WQR	

SUN hydraulics CORPORATION
1500 UNIVERSITY PARKWAY
SARASOTA, FLORIDA 34243, USA
TELEPHONE (813) 353-2383