
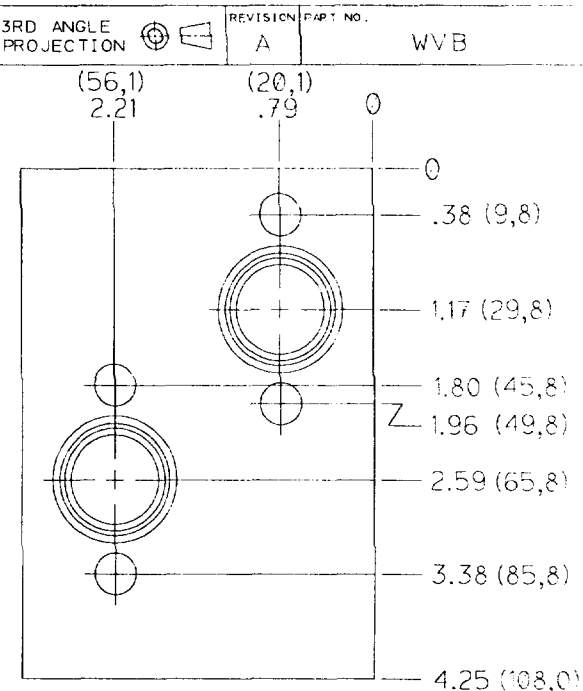
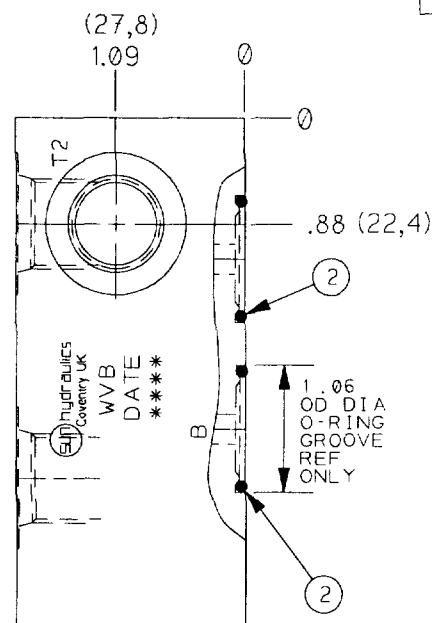


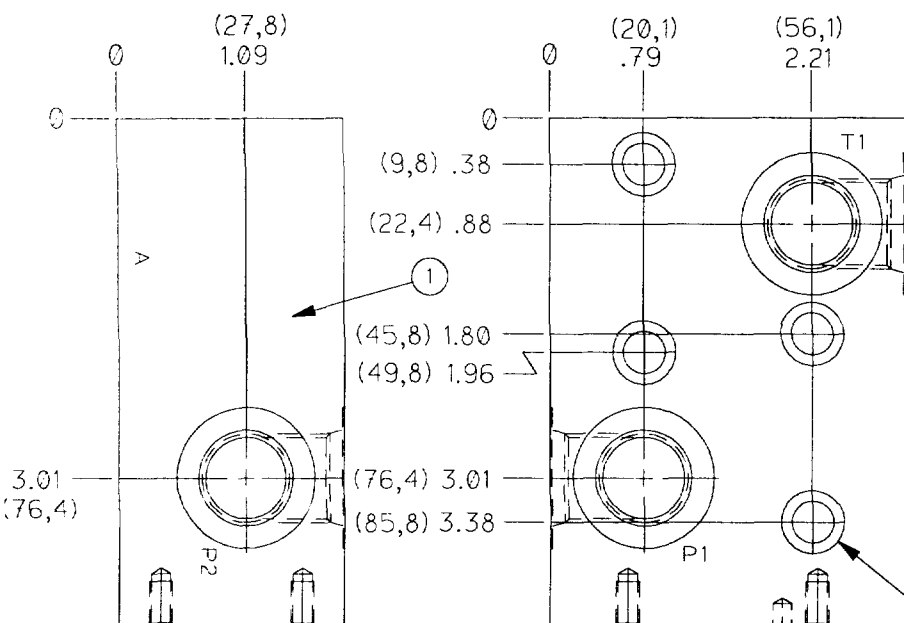

3RD ANGLE PROJECTION


REVISION PART NO.

A

WVB

PORTS P1, P2, T1, T2
SAE - 8

10-24 UNC THREADED HOLES
THREAD DEPTH .38(9,5)
TYP (4) PLACES

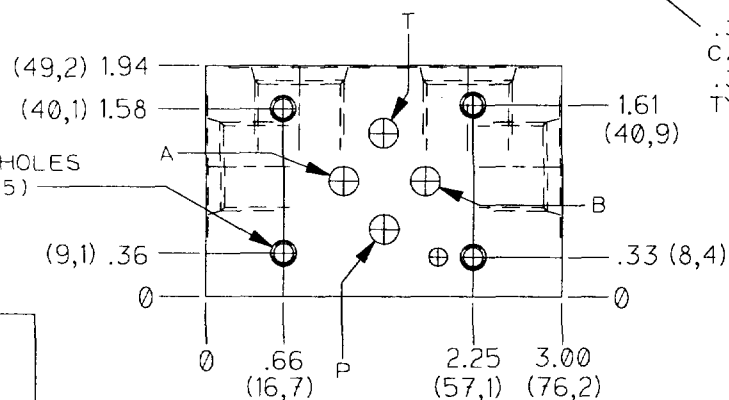


.34(8,7) DIA THRU
C/BORED .53(13,5) DIA
.38(9,6) DEEP
TYP (4) PLACES

NOTES:

- 1) ALUMINIUM BODIES. MAX CONTINUOUS SERVICE PRESSURE 210 BAR.
- 2) SEALS MATERIAL BUNA-N.
- 3) mm DIM'S IN BRACKETS.
- 4) THIS BODY WILL ONLY INTERFACE WITH .50 BSPP AND .50 NPTF PORTS ON OMP/OMR MOTOR RANGE.

SYMBOL



OUTLINE & ASS'Y

REVISION	DATE	DRN	CHK	REL
A	4.25 DIM WAS 4.38, CO-ORDS ALTERED TO SUIT	25 MAR 97	MJ	
B	LH VIEW. PORT STAMPING P2 WAS P1	FEB 92	GH	
C	MINOR COSMETIC CHANGES TO	OCT 90	GH	
D	CONFORM TO CATALOGUE STANDARDS			

UNLESS OTHERWISE SPECIFIED	TITLE	DATE	FINISH	REMOVE ALL BURRS
DIMENSION TOL	BODY WITH CETOP 3 STD SOL'ND DIRECT MTD DANFOSS OMP/R	83 APR 89	80	
.X ± .030	CATALOGUE			
.XX ± .015				
.XXX ± .005				
ANGLE TOL ± %				
FINISH 80				

ITEM	PART NO.	PART NAME
2	500-001-118	O-RING
1	159-330-002	BODY

REVISION	PART NO.
A	WVB

SUN hydraulics
LIMITED
WHEELER ROAD, WHITLEY,
COVENTRY, CV3 4LA, ENGLAND
TELEPHONE (01203) 507696