



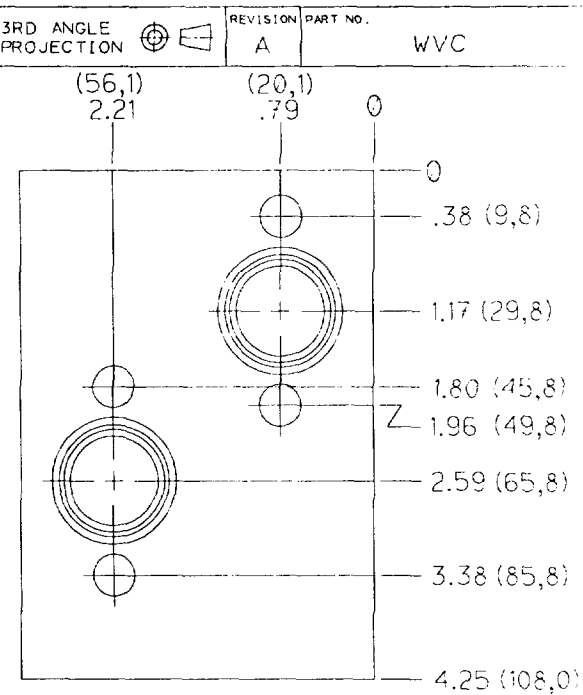

\.34(8,7) DIA THRU
C/BORED .53(13,5) DIA
.38(9,6) DEEP
TYP (4) PLACES


- 1) ALUMINIUM BODIES . MAX CONTINUOUS SERVICE PRESSURE 210 BAR .
- 2) SEALS MATERIAL BUNA-N .
- 3) mm DIM'S IN BRACKETS .
- 4) THIS BODY WILL ONLY INTERFACE WITH .50 BSPP AND .50 NPTF PORTS ON OMP/OMR MOTOR RANGE .

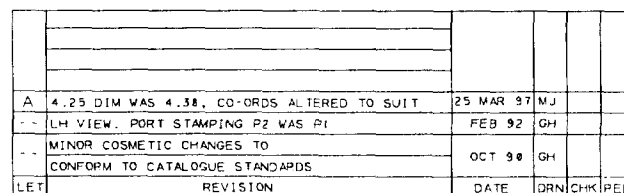

OUTLINE & ASS'Y

UNLESS OTHERWISE SPECIFIED	TITLE BODY W STD SO DANFS	
DIMENSION TOL	CADD SCALE	REF.
.X = ±.030 .XX = ±.015 .XXX = ±.005	1"	CATALC
ANGLE TOL = 1/2° FINISH 80 V REMOVE ALL BURRS	DRAWN CCM	CHECK GH
	DATE	DATE
	03 APR 89	29 NOV 89

2	500-001-118	O RING	2
1	159-330-003	BODY	1
ITEM	PART NO.	PART NAME	QTY

WITH CETOP 3 VAL'ND DIRECT MTD S OMP/R		REVISION	PART NO.
		A	WVC
ROGUE	MATERIAL ALUMINIUM	 SUN hydraulics® UNLIMITED WHEELER ROAD, WHITLEY COVENTRY, CV3 4LA, ENGLAND TELEPHONE (01203) 307696	
RELEASE	HEAT TREAT & FINISH 		

SUN hydraulics[®]
LIMITED
WHEELER ROAD, WHITLEY,
COVENTRY, CV3 4LA, ENGLAND
TELEPHONE (01203) 301696