
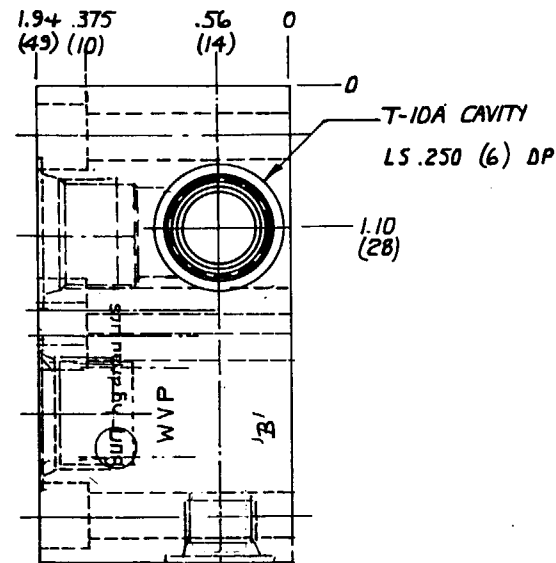
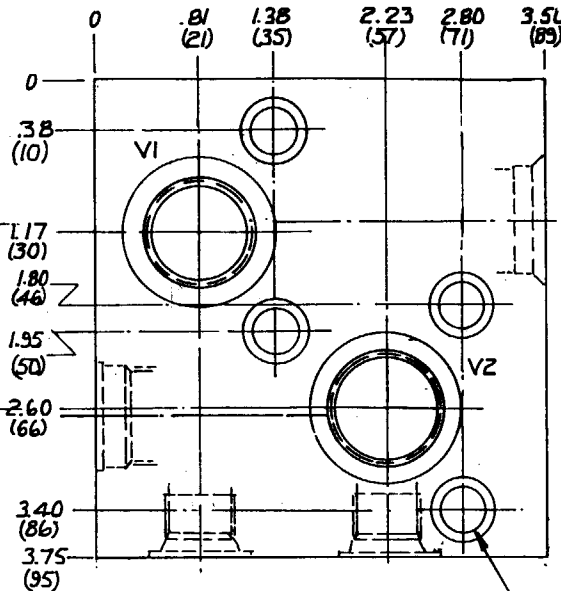




PORTS V1 & V2	PORTS G1 & G2
SAE-10'	SAE-6

REVISION PART NO. WVP

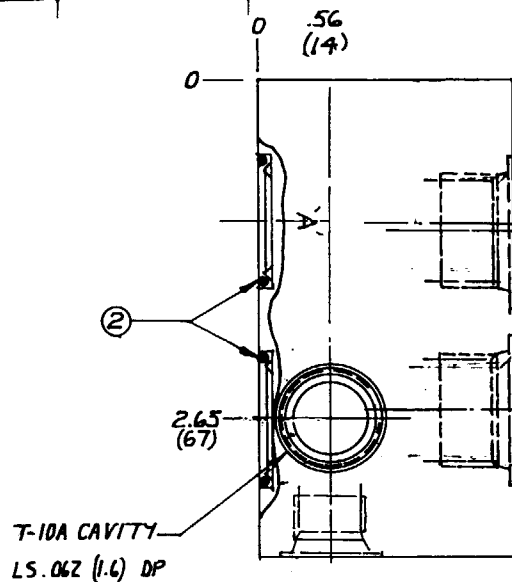

.344 DIA (8.75) MT6 HOLES
BRORED FOR SHC SCREWS
TYP (4) PLCS

SYMBOL

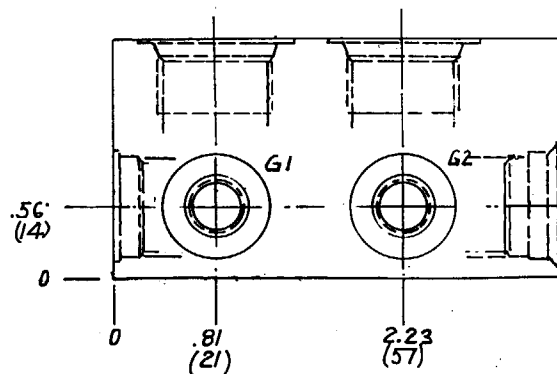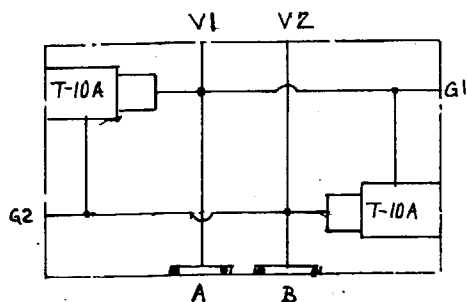

SEALS, MAT: Buna ~ N ~

NOTE!

- 1: ALUMINIUM BODIES MAX CONTINUOUS SERVICE PRESSURE 3000 PSI (210 BAR)
- 2: THIS BODY WILL ONLY INTERFACE WITH .500 BSPP AND .500 NPTF PORTS ON OMP OMR MOTOR RANGE

OUTLINE & ASSEMBLY		TITLE BODY DUAL T-10A CAVITY'S		REVISION	PART NO.
DIRECT MTD ON DANFOS OMP OMR MOTORS		MATERIAL ALUMINIUM		WVP	
SCALE 1:1	REF CATALOGUE	6061-T6		HEAT TREAT & FINISH	
DRAWN CCM	CHECK GY	RELEASE			
DATE 1.2.89	DATE 3.8.89	DATE			
MINOR COSMETIC CHANGES TO CONFORM TO CAT'S STDS		OCT 90 GA			
LET	REVISION	DATE	DRN	CHK	REL

SUN hydraulics®