


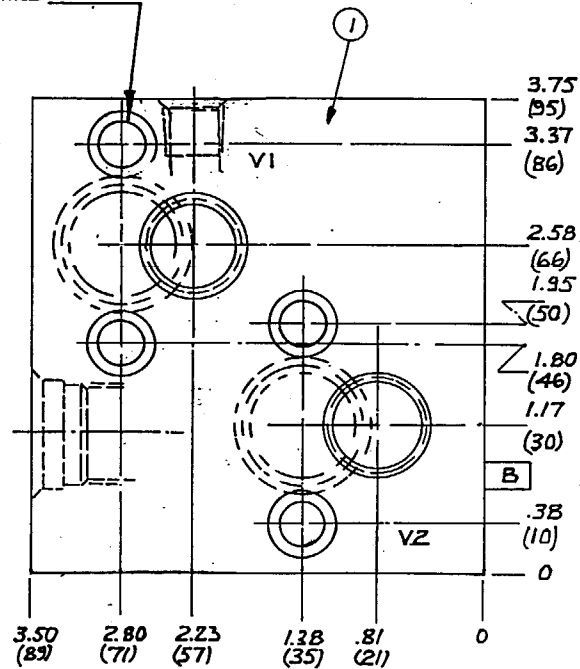


PORTS V1 & V2	PORT 'G'
.500-14 NPTF	.250-18 NPTF

REVISION	PART NO
1	WVR

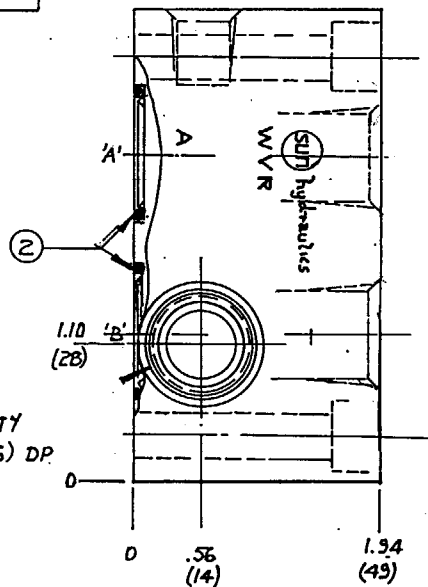

MOUNTING PROVISIONS: .344" DIA THRO
 .531" DIA C/BORE x .375" DEEP,
 TYP (4) PLACES.

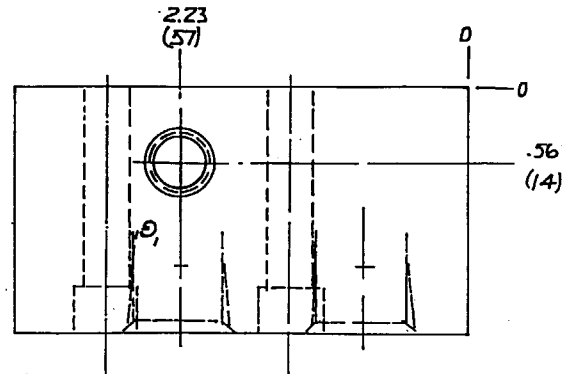

SEALS MATL = BUNA-N.

2	500 001 118	'O' RING	1
1	159 321 003	BODY	1
1	PART NO	PART NAME	RTY

OUTLINE & ASSEMBLY

TITLE BODY SINGLE T-10A CAVITY

DIRECT MTD ON DANFOSS OMP OMR MOTOR

REVISION PART NO WVR

SCALE	REF	MATERIAL
1:1	CATALOGUE	ALUMINIUM
DRAWN	CHECK	RELEASE
DATE	DATE	DATE
27.3.83	27.3.83	27.3.83

SUN hydraulics

NOTE

- 1: ALUMINIUM BODIES MAX CONTINUOUS SERVICE PRESSURE 3000 PSI (210 BAR)
- 2: THIS BODY WILL ONLY INTERFACE WITH .500 BSPP AND .500 NPTF PORTS ON OMP OMR MOTOR RANGE

LET	REVISION	DATE	DRN	CHK	REV

UNLESS OTHERWISE SPECIFIED

DIMENSION TOL

X .000

.XX .015

.XXX .005

ANGLE TOL .1°

FINISH 125-1

REMOVE ALL BURRS