




PORTS V1 & V2	PORT 'G'
SAE -10	SAE -6

REVISION	PART No
4	WVS

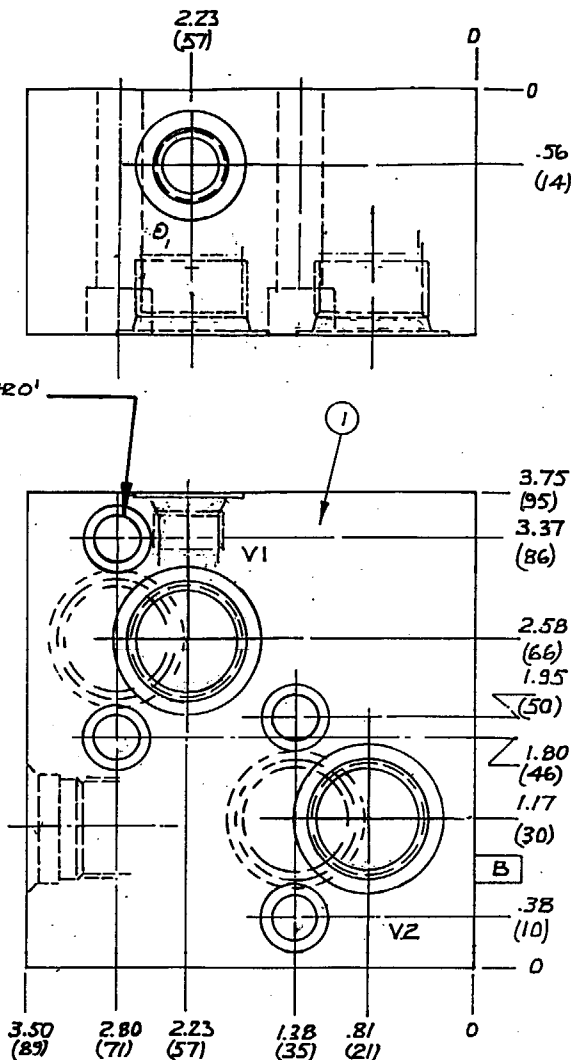

MOUNTING PROVISIONS : .344 DIA THRO'
 .531" DIA C/BORE x .375" DEEP,
 TYP' (4) PLACES.

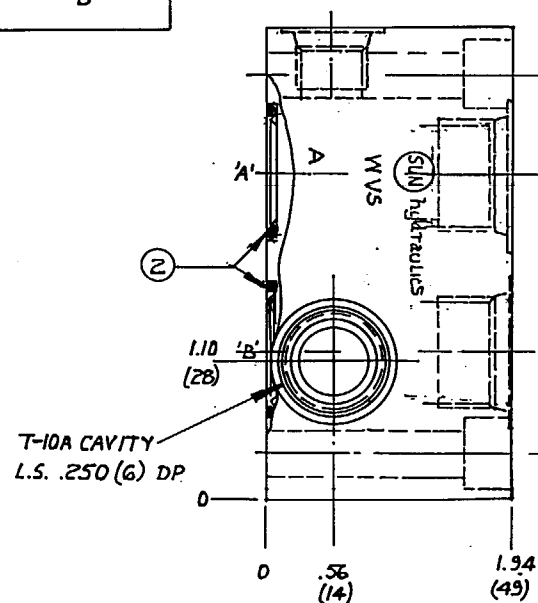

SEALS MATL = BUNA - N.

2	500 001 118	'O' RING	1
1	159 321 002	BODY	1
1		PART NO	
1		PART NAME	RTY

NOTE:

- 1: ALUMINIUM BODIES MAX CONTINUOUS SERVICE PRESSURE 3000 PSI (210 BAR)
- 2: THIS BODY WILL ONLY INTERFACE WITH .500 BSPP AND .500 NPTF PORTS ON OMP OMR MOTOR RANGE

								UNLESS OTHERWISE SPECIFIED				TITLE BODY SINGLE T-10A CAVITY				REVISION		PART No. WVS	
								DIMENSION TOL.				DIRECT MTD ON DANFOSS OMP OMR MOTOR							
				X ± .000				SCALE				REF		MATERIAL ALUMINIUM					
				XX ± .015				1:1				CATALOGUE		5061-T6					
				XXX ± .005				DRAWN				CHECK		RELEASE				HEAT TREAT & FINISH	
				ANGLE TOL. ± 1°				CEM				C							
				FINISH 125 /				DATE				DATE		DATE					
				REMOVE ALL				21.3.89				21.3.89		21.3.89					
				BURRS															
LET		REVISION		DATE		DRN		CHK		REL									

