


WVT




PORTS V1 & V2	PORT 'G'
.500-14 BSPP	.250-19 BSPP

REVISION	PART NO
4	WVT

SYMBOL



MOUNTING PROVISIONS : .344" DIA THRO'
 .531" DIA C/BORE X .375 DEEP,
 TYP (4) PLACES.

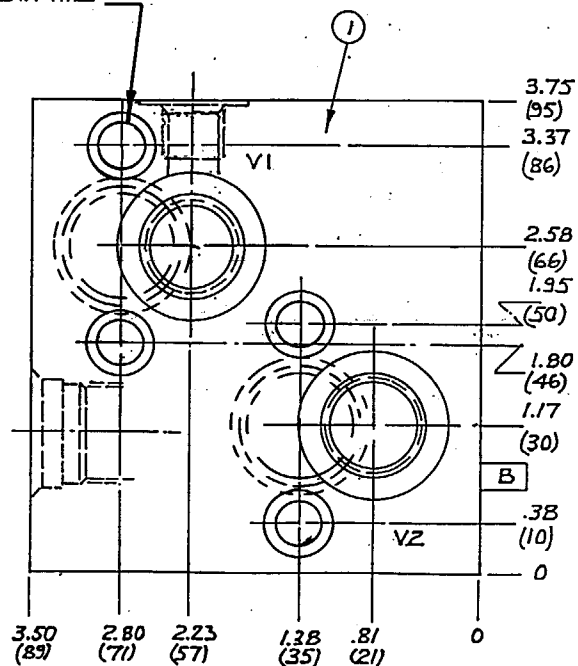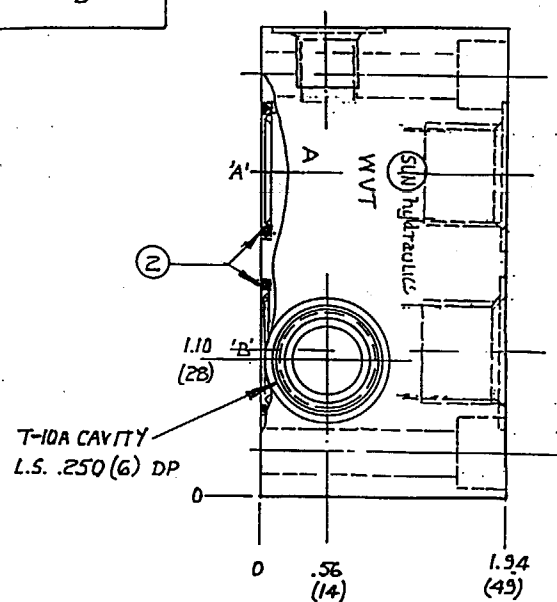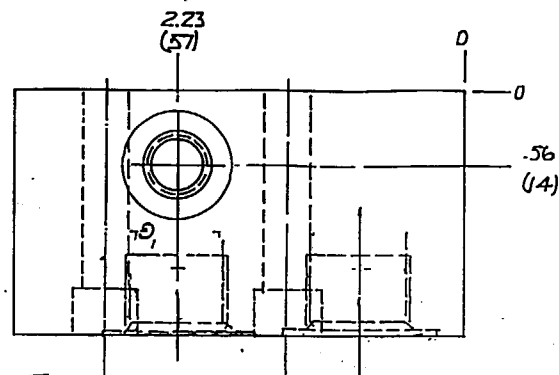

SEALS MATL = BUNA - N.

2	500 001 118	'O' RING	1
1	159 321 003	BODY	1
1		PART NO	
1		PART NAME	ITY

- 1: ALUMINIUM BODIES MAY CONTINUOUS SERVICE PRESSURE 3000 PSI (210 BAR)
- 2: THIS BODY WILL ONLY INTERFACE WITH .500 BSPP AND .500 NPTF PORTS ON OMP OMR MOTOR RANGE

LET.		REVISION		DATE		DRN	CHK	REC	UNLESS OTHERWISE SPECIFIED DIMENSION TOL. X .000 XX .015 XXX .008 ANGLE TOL. 1° FINISH 125- REMOVE ALL BURRS		SCALE 1:1 REF CATALOGUE DRAWN GCHM CHECK GCHM DATE 27.3.83	TITLE BODY SINGLE T-IDA CAVITY DIRECT MTD ON DANFOSS OMP OMR MOTOR	MATERIAL ALUMINIUM 6061-T6 HEAT TREAT & FINISH	REVISION 4 PART NO. WVT.	PART NAME ITY
------	--	----------	--	------	--	-----	-----	-----	---	--	--	---	--	-----------------------------	------------------

SUN hydraulics®