
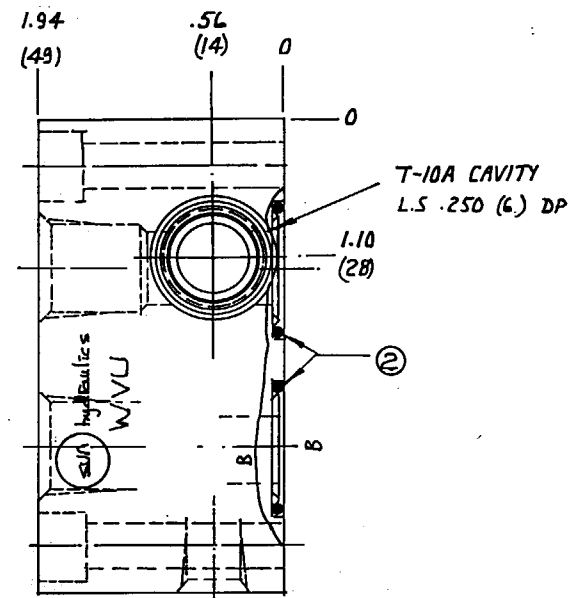



WVU

PORTS V1 & V2	PORT 'G'
.500-14 NPTF	.250-18 NPTF


REVISION	PART NO
9	WVU

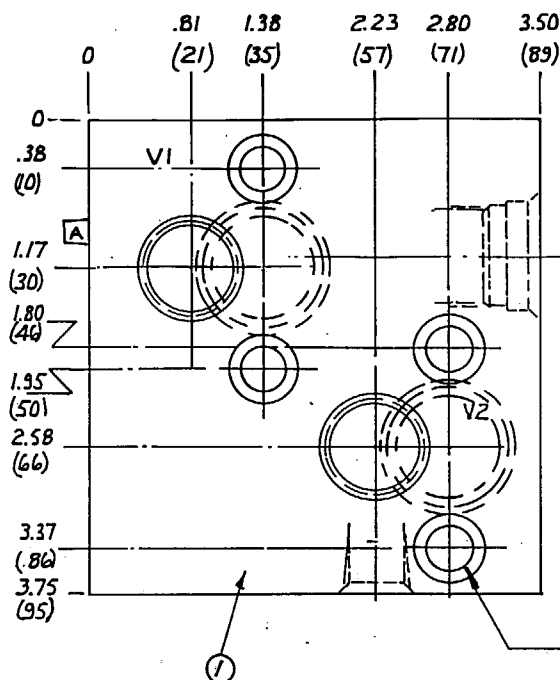

MOUNTING PROVISIONS : .344" DIA THRO'
 .531" DIA C/BORE x .375" DEEP - TYP (4) PLCS

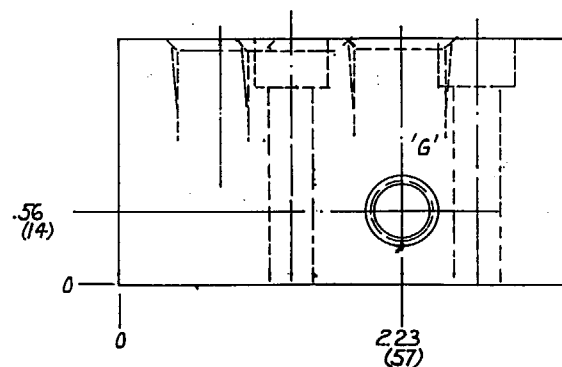

SEALS MATL: = BUNA - N.



NOTE1

- 1: ALUMINUM BODIES MAX CONTINUOUS SERVICE
 PRESSURE 3000 PSI (210 BAR)
 2: THIS BODY WILL ONLY INTERFACE WITH .500 BSPP
 AND .500 NPTF PORTS ON DANFOSS OMP OMR MOTOR RANGE

LET		REVISION		DATE	DRN	CHK	REL	UNLESS OTHERWISE SPECIFIED		TITLE BODY SINGLE T-10A CAVITY DIRECT MTD ON DANFOSS OMP OMR MOTOR		REVISION	PART NO	WVU	
								DIMENSION TOL XX = ±.003 XXX = ±.015 ANGLE TOL. ± 1° FINISH 125/ REMOVE ALL BURRS		SCALE 1:1 REF CATALOGUE		MATERIAL ALUM 6061-T6 20X35		HEAT TREAT & FINISH	
								DRAWN 12/11/11 DATE 1/4/12		CHECKED 1/4/12 DATE 1/4/12		RELEASE		DATE	

SUN hydraulics