
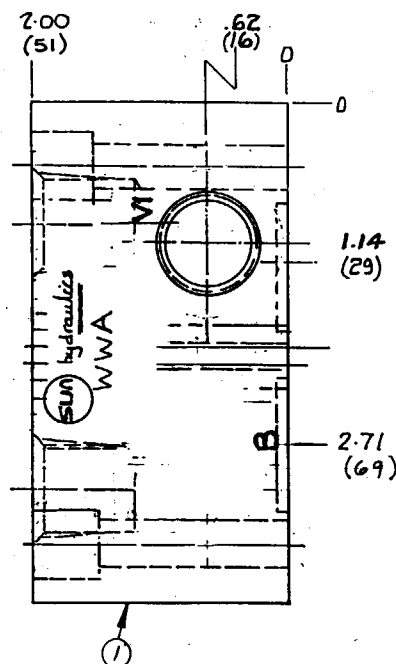
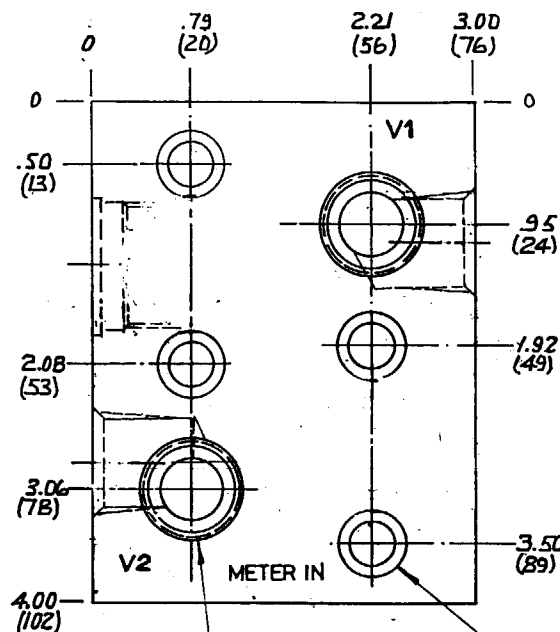


REVISION PART NO WWA

ALL PORTS MARKED
V1 & V2 (TOP & SIDES)
.500-14 NPTF

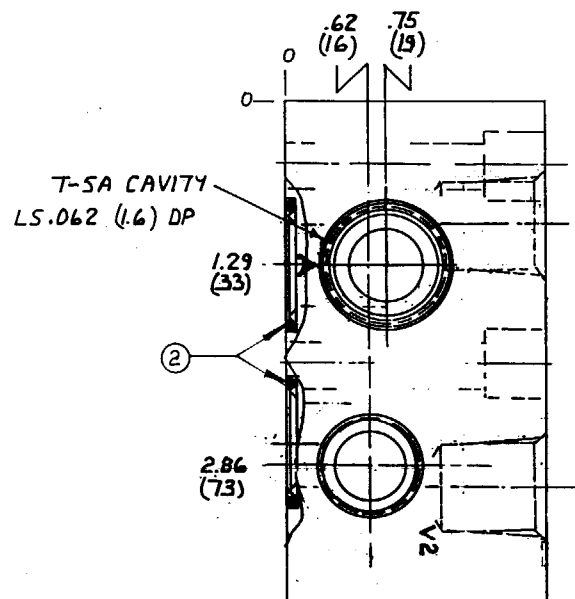


FOR PORT TAPPINGS

SEE CHART TOP L.H. (4 PLCS)

MTG PROVISIONS: .344 DIATHRO
.531 DIA C/BORE x .50 DEEP.
TYP (4) PLCS.

SEALS MAT^L :-
BUNA-N.

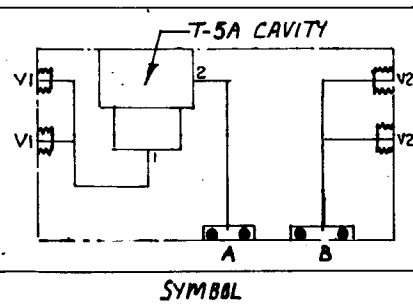

NOTE !
1) ALUMINIUM BODIES MAX CONTINUOUS SERVICE
PRESSURE 3000 PSI (210 BAR)
2 THIS BODY WILL ONLY INTERFACE WITH .500BSPP
AND .500 NPTF PORTS ON DMP DMR MOTOR RANGE

OUTLINE & ASSEMBLY				REVISION	PART NO
TITLE BODY SINGLE T-5A CAVITY METER IN 'A' PORT DANFOSS DMP DMR				WWA	
UNLESS OTHERWISE SPECIFIED					
DIMENSION TOL.					
.X = ± .008					
.X = ± .015					
.X = ± .008					
ANGLE TOL. ± 1°					
FINISH 125.4					
REMOVE ALL BURS					
DATE	CHECK	RELEASE	DATE		
11.2.89	11.3.90				
MATERIAL ALUMINIUM 6061-T6					
HEAT TREAT & FINISH					
H					

