
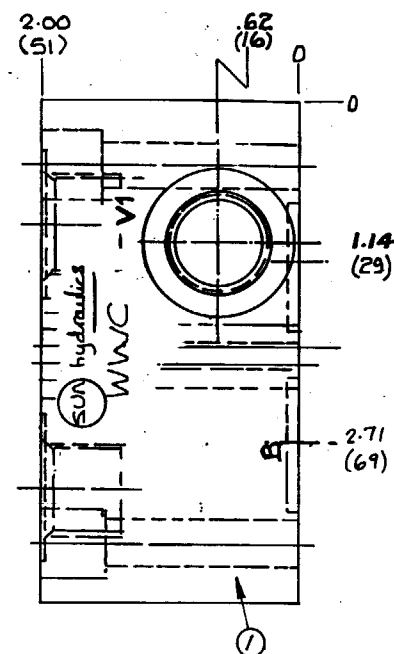
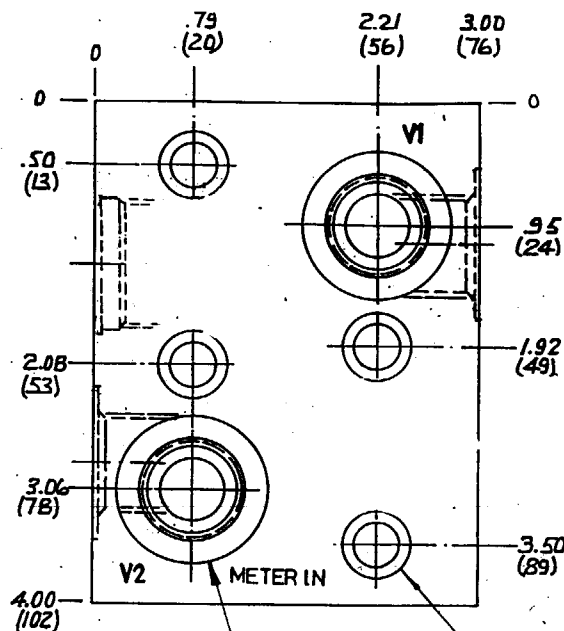


ALL PORTS MARKED
V1 & V2 (TOP SIDES)
500-14 BSPP


REVISION PART NO
WWC

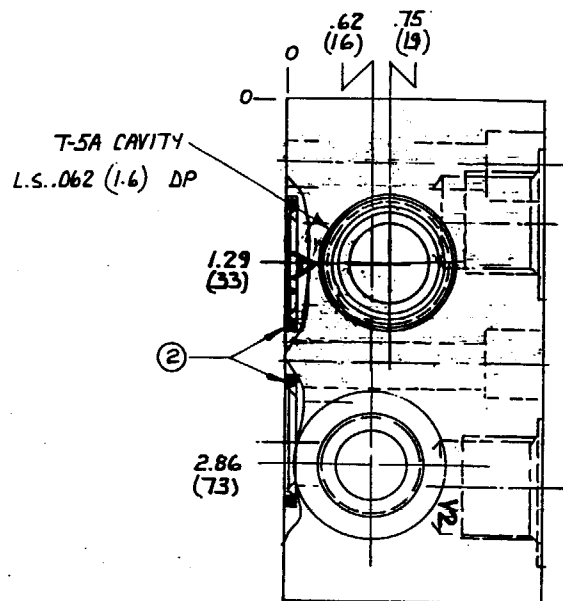

FOR PORT TAPPINGS
SEE CHART TOP L.H.

MTG PROVISIONS :- .344 DIA THRO
.531 DIA C/BORE x .50 DEEP.
TYP (4) PLCS.

SEALS MAT' :-
BUNA - N.

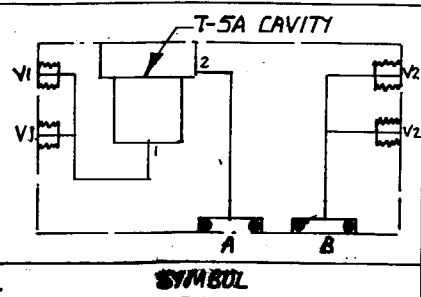

- NOTE !
- 1) ALUMINIUM BODIES MAX CONTINUOUS SERVICE PRESSURE 3000 PSI (210 BAR)
 - 2, THIS BODY WILL ONLY INTERFACE WITH 500-BSPP AND 500 NPTF PORTS ON OMP OMR MODK RANGE

OUTLINE & ASSEMBLY		TITLE BODY SINGLE T-5A CAVITY METER IN ON A PORT DANEOSS OMP OMR		REVISION PART NO	
UNLESS OTHERWISE SPECIFIED		SCALE 1:1 CATALOGUE		W W C	
DIMENSION TOL		MATERIAL ALUMINIUM 6061-T6		HEAT TREAT & FINISH	
X = ± .000		DRAWN CCMK		DATE 14.2.90	
Y = ± .015		CHECK		DATE 13.3.90	
Z = ± .005		RELEASE		DATE	
ANGLE TOL 2.1°		REMOVE ALL BURRS			
REVISION		DATE		DWN	
Oct 90		CHK		REL	

SUN hydraulics