
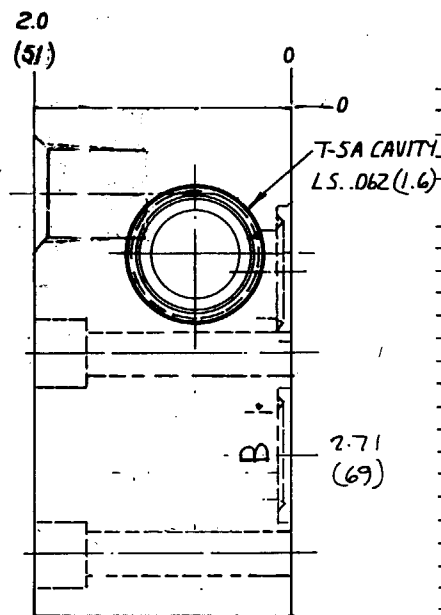
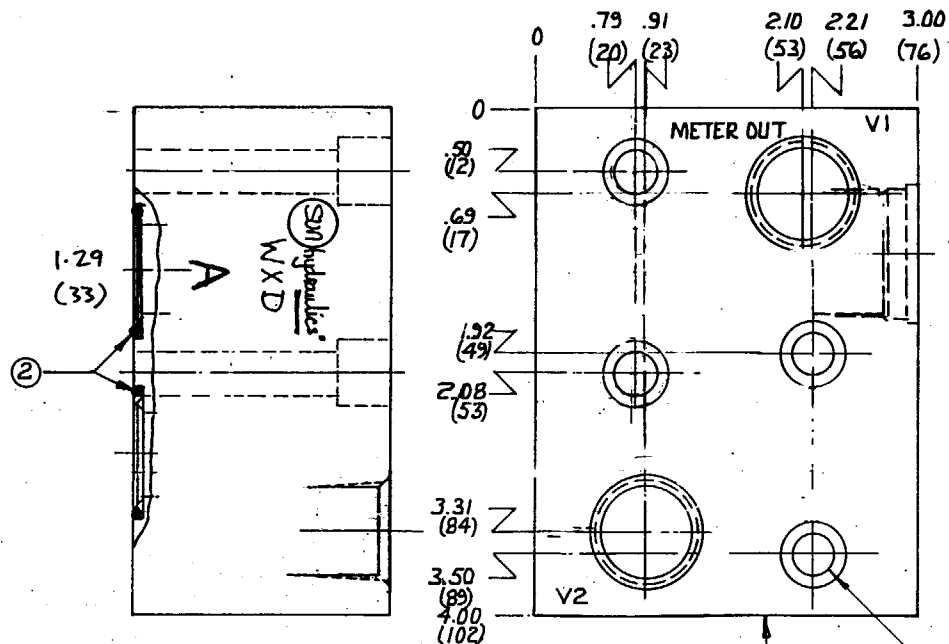


PORTS MARKED VIAVZ

.500 -14 NPTF

REVISION PART NO WXD

SYMBOL

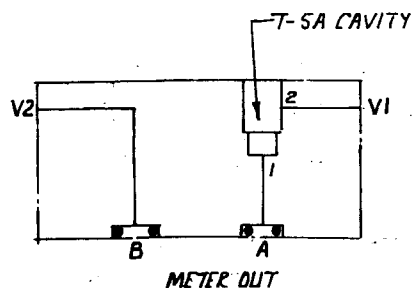

.344 DIA (875) MTG HOLES
9/BORED .531 DIA x .375 DEEP.
TYP (4) PLCS

SEALS MAT: BUNA-N.

2	500 001 11B	'O' RING	2
1	159 -325-001	BODY	1
1	PART N°	PART NAME	QTY

NOTE!

- 1) ALUMINIUM BODIES MAX CONTINUOUS SERVICE PRESSURE 3000 PSI (210 BAR)
- 2) THIS BODY WILL ONLY INTERFACE WITH .500BSPP AND .500NPTF PORTS ON OMP OMR MOTOR RANGE

OUTLINE & ASSEMBLY		TITLE BODY SINGLE T-SA CAVITY DIRECT MTD ON 'A' PORT DANFOSS OMP OMR SERIES		REVISION PART NO WXD	
UNLESS OTHERWISE SPECIFIED		SCALE 1:1		MATERIAL 6061-T6 3x4 ALUM	
DIMENSION TOL.		CHECK M.S. 1/61		HEAT TREAT & FINISH	
X = ± .030		DATE 2-2-69		DATE	
XX = ± .015		DATE		DATE	
XXX = ± .005		DATE		DATE	
ANGLE TOL. ± 1°		DATE		DATE	
FINISH 125/ REMOVE ALL BURRS		DATE		DATE	
LET.	REVISION	DATE	DRN	CHK	REL

SUN hydraulics