


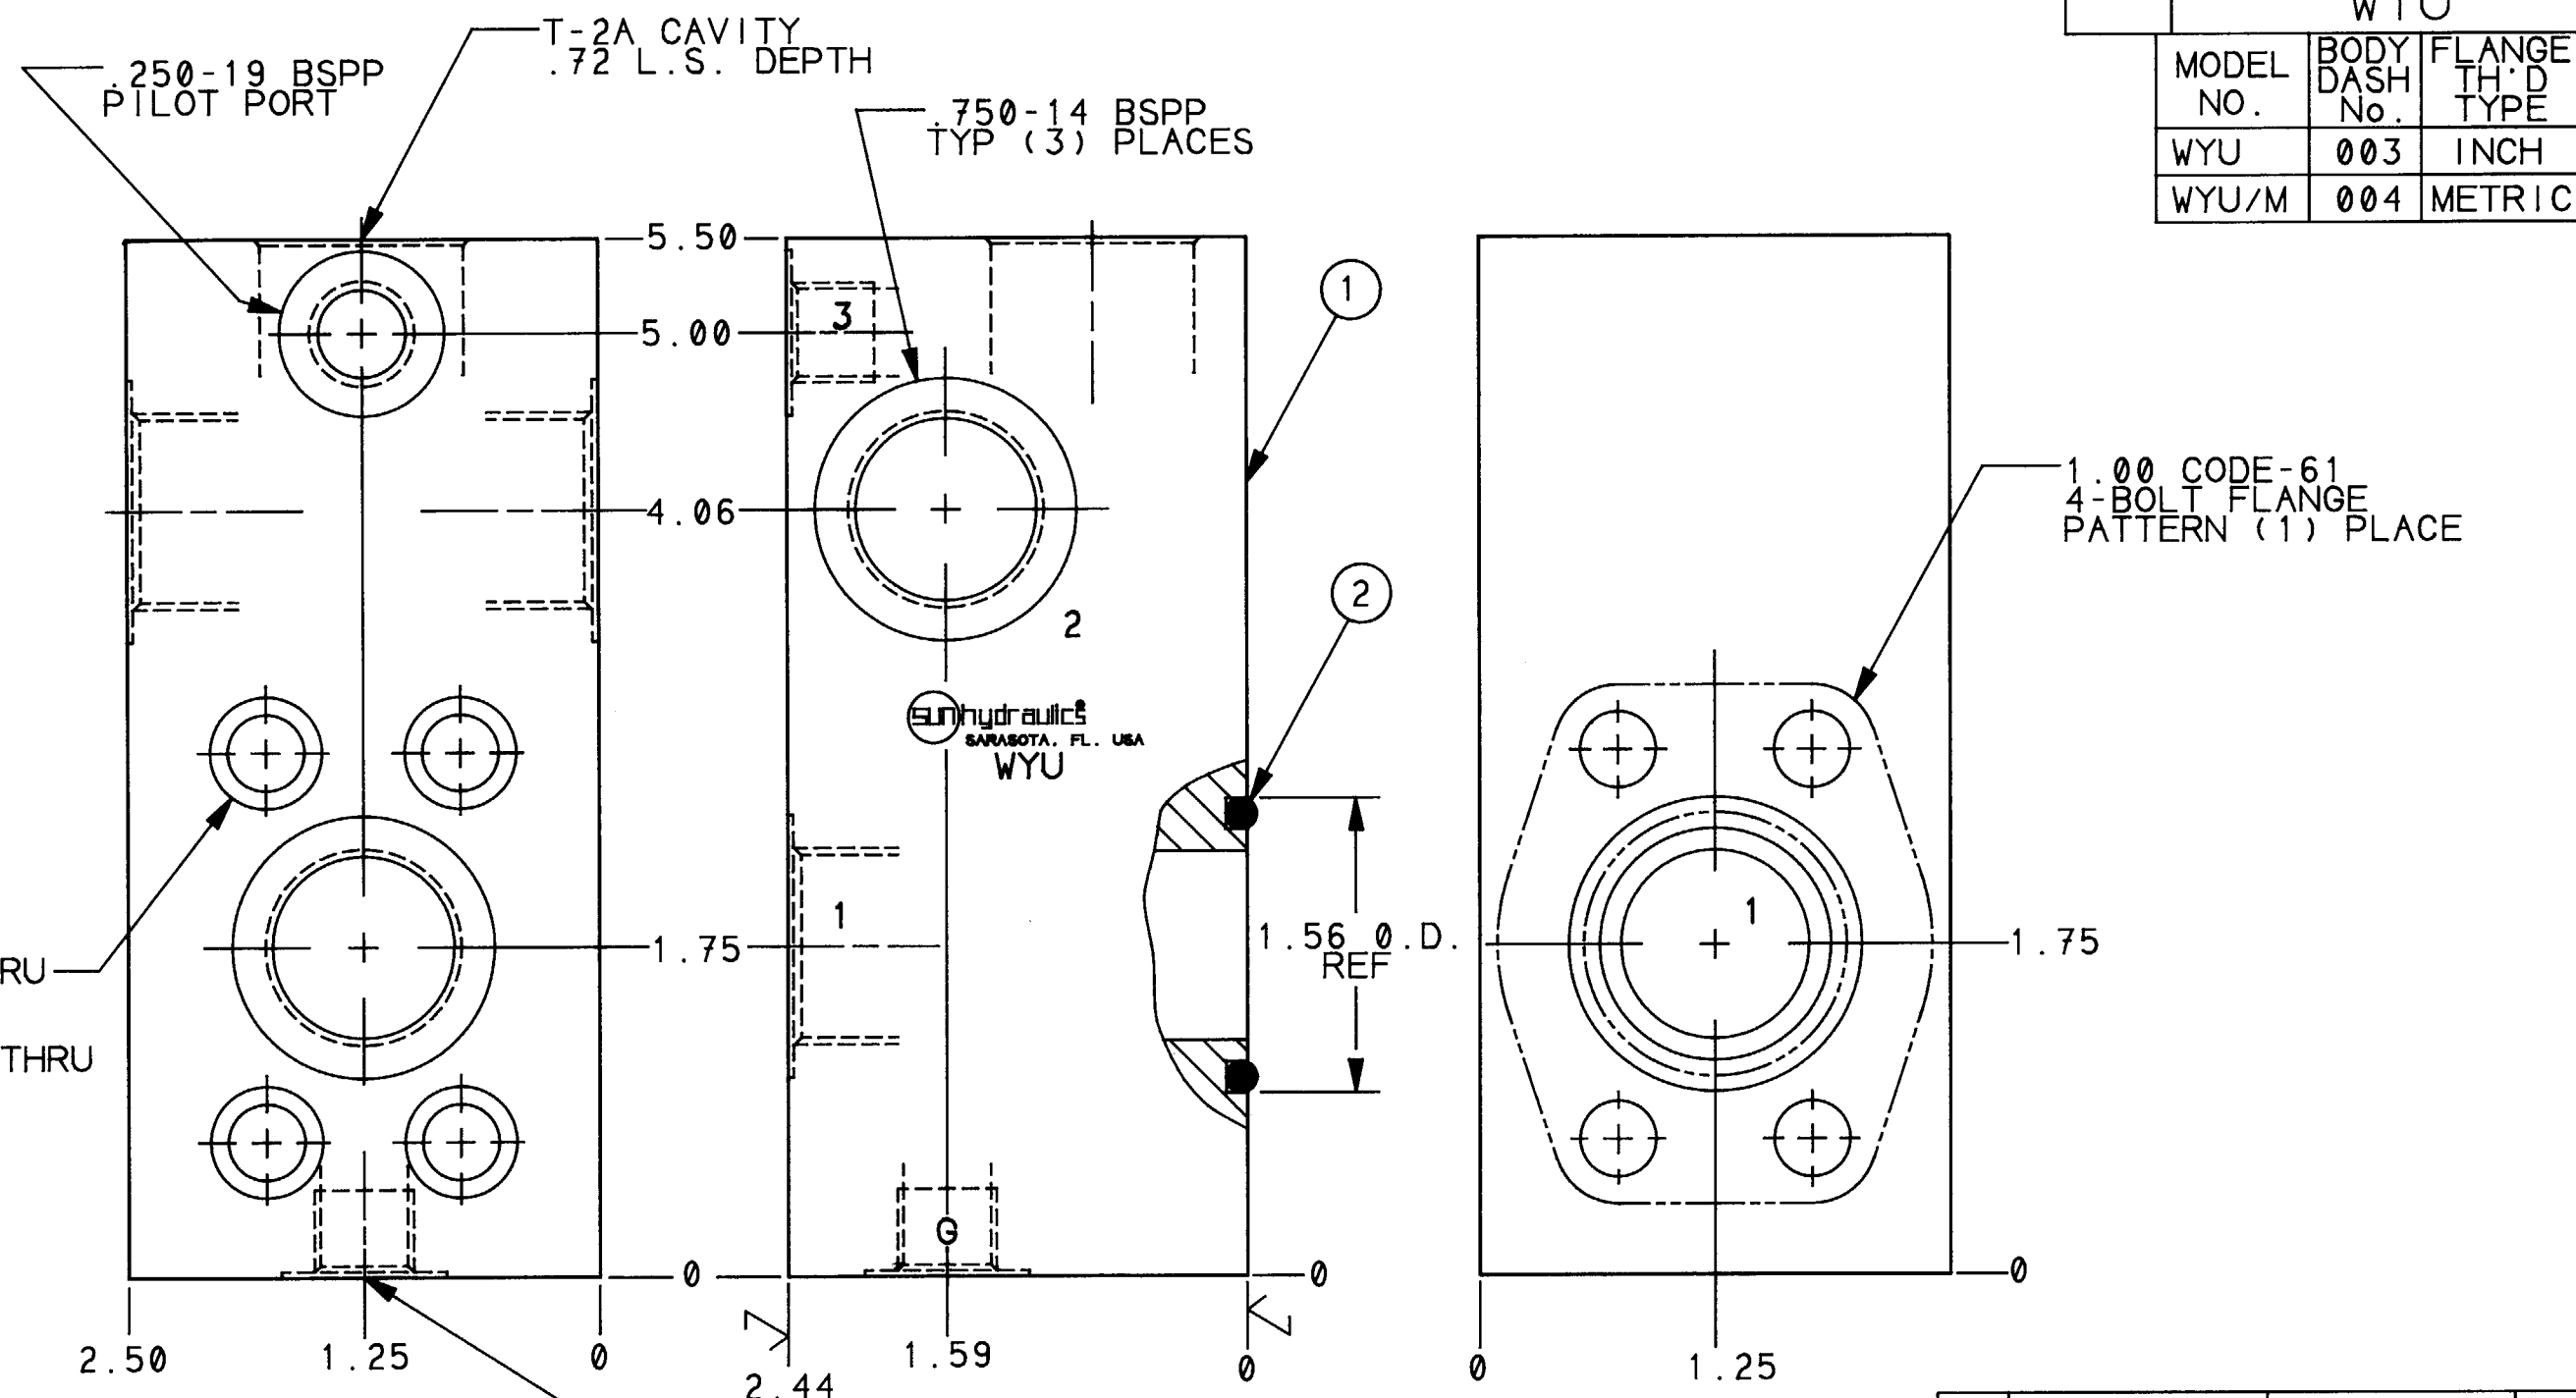

INCH: .41 DIA. THRU—
C-BORED .59 DIA.
x .34 DP.
METRIC: .42 DIA. THRU
C-BORED .69 DIA.
x .36 DP.
TYP (4) PLACES

NOTES:

- 1) ALUMINUM BODIES-3000 PSI
MAXIMUM CONTINUOUS SERVICE
PRESSURE.
- 2) FOR OTHER OPTIONS SEE OPTION
SHEET.
- 3) SEALS: BUNA-N.

					UNLESS OTHERWISE SPECIFIED	TITLE DIRECT SAE 1.00 CODE 61		REVISION	PART NO.
					DIMENSION TOL	FLANGE MTD T-2A CAV. W/THD OUT.			WYU
					.X = ±.030	SCALE REF.	MATERIAL		
					.XX = ±.015	1/1	CODE-62=WYD		ALUMINUM BODY
					.XXX = ±.005	DRAWN	CHECK	RELEASE	HEAT TREAT & FINISH
					ANGLE TOL ± 1/2°	BR5	R/B	2020	
LET	REVISION				DATE	DRN	CHK	REL	
					FINISH 80✓	DATE	DATE	DATE	
					REMOVE ALL BURRS	3/22/89	3/23/89	4-4-89	


sun hydraulics[®]
 CORPORATION
 1500 UNIVERSITY PARKWAY
 SARASOTA, FLORIDA 34243, USA
 TELEPHONE (813) 355-2963