
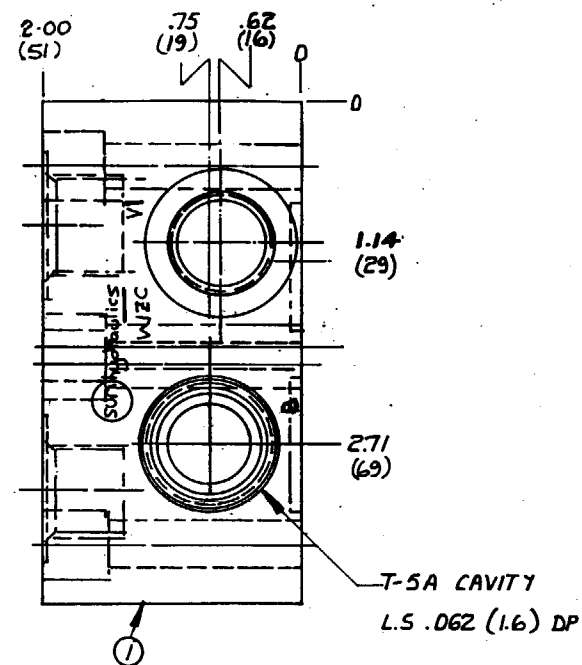
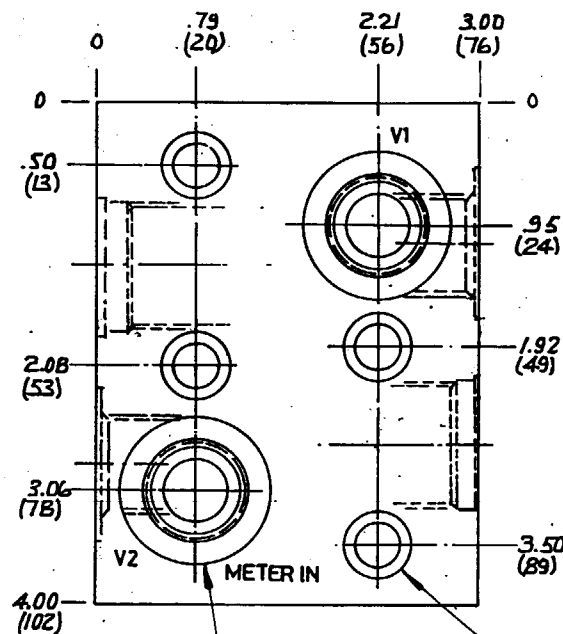


ALL PORTS MARKED
V1 & V2 (TOP & SIDES)
.500-14 BSPP


REVISION PART NO. WZC

SEALS MAT: = BUNA-N.

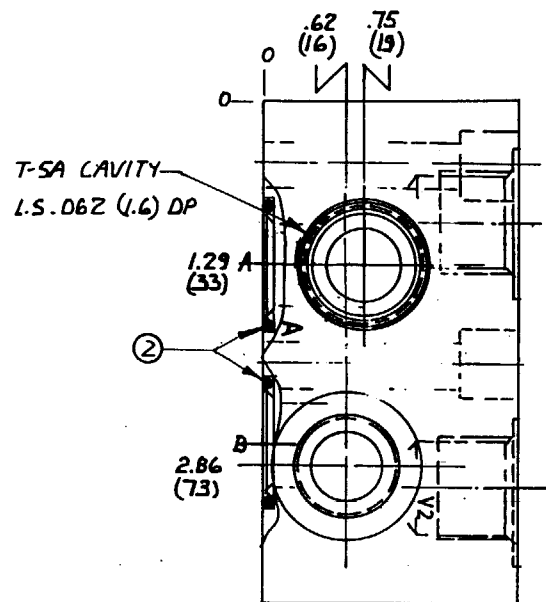

FOR PORT TAPPING SEE
CHART TOP L.H. (4 PLCS)

.344 DIA (B.75) MTG HOLES
BORED FOR SHC SCREWS
TYP (4) PLCS

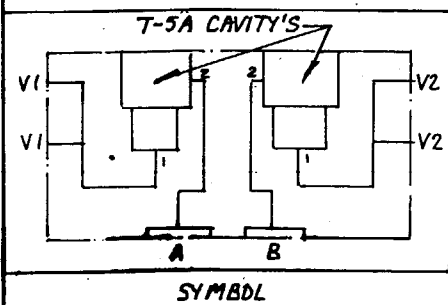

- NOTE!
- 1) ALUMINIUM BODIES MAX CONTINUOUS SERVICE PRESSURE 3000 PSI (210) BAR
 - 2) THIS BODY WILL ONLY INTERFACE WITH .500BSPP AND .500NPTF PORTS ON OMP OMR MOTOR RANGE

UNLESS OTHERWISE SPECIFIED		TITLE BODY DUAL T-5A CAVITY METER IN ON A & B PORTS DANFOS DMP DMP		REVISION PART NO. WZC	
DIMENSION TOL		SCALE REF. CATALOGUE		MATERIAL ALUMINIUM 6061-T6	
X = ± .030		CHECK		HEAT TREAT & FINISH	
XX = ± .015		DATE		DATE	
XXX = ± .005		DATE		DATE	
ANGLE TOL. 2 1/2°		DATE		DATE	
FINISH 125/		DATE		DATE	
REMOVE ALL BURRS		DATE		DATE	
MINOR COSMETIC CHANGES TO CONFORM TO CAT' STD		OCT 90		DATE	
REVISION		DATE		DATE	
LET.		DATE		DATE	

SUN hydraulics